

## Stainless Steel Expanded Metal Lath - 3.4 lbs / sqyd Stainless Steel Alloy 304 without paper backing meeting ASTM C847

### SCOPE

This submittal covers stainless steel expanded metal diamond lath, designed to be used as a base for gypsum or portland cement plaster or a backing for rigid insulation.

### DIMENSIONS, WEIGHTS AND PERMISSIBLE VARIATIONS Per ASTM C847

Minimum thickness of expanded metal lath

1. Diamond expanded metal lath:  $\frac{1}{8}$  inch

Minimum sheet dimensions - inches

1. All styles - Length of Sheet: 96 inches (Minimum)
2. All styles - Width of Sheet: 27 inches (Minimum)

Nominal weights of lath (for U.S.) - lbs/yd<sup>2</sup>

Flat Stainless Steel Lath weighing 3.4 lbs/yd<sup>2</sup>


Permissible Variations - inches

1. Thickness:  $\pm 1/64$  inch
2. Width:  $\pm 3/16$  inch
3. Length: -0 +1 inch
4. Weight:  $\pm 10\%$

### FINISH

AMICO Stainless Steel expanded metal lath is produced as specified from Alloy 304 with no further coatings applied.

Fasteners shall be compatible with the lath metal alloys

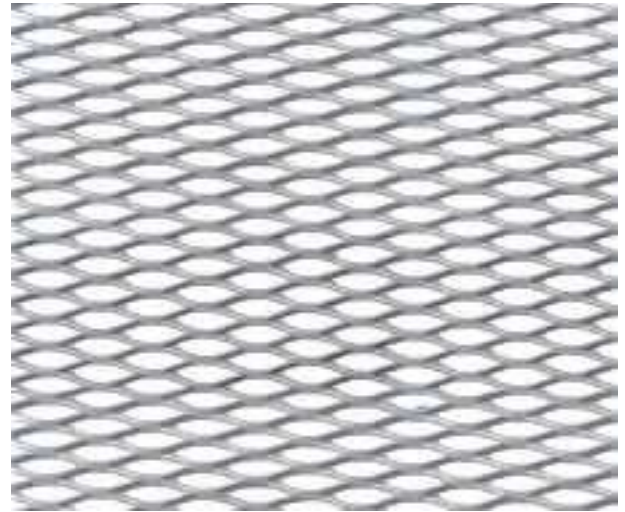

### PACKAGING AND PACKAGE MARKING

1. AMICO stainless steel lath is provided individually or packaged in 10 sheet bundles.

### CERTIFICATION

When specified a certification that products meets the requirements of ASTM C847 shall be provided.

### AMICO LATH AND STUCCO ACCESSORIES MEETS THE FOLLOWING SPECIFICATIONS

ASTM C1063 - Standard Specification for Installation of Lathing and Furring to Receive Interior and Exterior Portland Cement-Based Plaster

The stainless steel base metal meets ASTM A240

Meets Buy American Procurement Requirements.  
Made in the United States of America

Grade Submitted: Stainless Steel Alloy 304, for corrosion protection

LEED: 70 - 80 percent recyclable content

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

### ALABAMA METAL INDUSTRIES CORPORATION

3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642 ♦ Facsimile 205/786-6527