
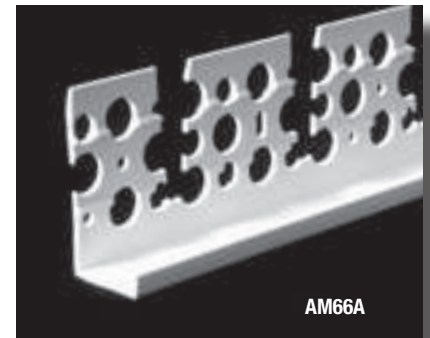


STUCCO CASING BEADS

Vinyl Arched Casing Bead offers the same quality and performance as our other fine casing bead products plus it has the capability to curve to most construction radiuses. 10' standard length. (Patent #5,688,638)


Product No.	Dimensions	Ground	Box Count
AM66A-250	1 3/4" Perf. Flange	1/4" Regular	25
AM66A-380	1 3/4" Perf. Flange	3/8" Regular	25
AM66A-500	1 3/4" Perf. Flange	1/2" Regular	25
AM66A-580	1 3/4" Perf. Flange	5/8" Regular	25
AM66A-750	1 3/4" Perf. Flange	3/4" Regular	25
AM66A-780	1 3/4" Perf. Flange	7/8" Regular	25
AM66A-1000	1 3/4" Perf. Flange	1" Regular	25
AM66A-1250	1 3/4" Perf. Flange	1 1/4" Deep	25
AM66A-1500	1 3/4" Perf. Flange	1 1/2" Deep	25
AM66A-2000	1 3/4" Perf. Flange	2" Deep	25



AM66A

Vinyl Casing Bead with Wide Flange is used to terminate plaster at the top of the wall and at all through wall penetrations. The extra wide 2 1/2" perforated flange is used in those areas that require a wider than normal flange. This bead is also available with 1/8" weep holes punched at 6" intervals. Please specify at time of order. 10' standard length.



Product No.	Dimensions	Ground	Box Ct.	Weep Opt.
AM66WF-380	2 1/2" Flange	3/8"	100	Yes
AM66WF-500	2 1/2" Flange	1/2"	100	Yes
AM66WF-580	2 1/2" Flange	5/8"	75	Yes
AM66WF-750	2 1/2" Flange	3/4"	75	Yes



AM66WF

Vinyl Casing Bead with Reveal is used as a plaster termination at windows and (sliding) doors that are inset from the plane of the wall surface, when this inset is not deep enough to use a corner bead. The casing bead with reveal may be the perfect accessory to deal with this transition by eliminating the caulk joint created by a normal casing bead while providing a paintable surface. caulking and flashing is still required at the juncture of the bead and the window. This bead is also available with 1/8" weep holes punched at 6" intervals. Please specify at time of order. 10' standard length

Product No.	Dimensions	Ground	Box Ct.	Weep Opt.
AMRS-580-500	1 3/4" Flange	5/8"	50	Yes
AMRS-750-500	1 3/4" Flange	3/4"	40	Yes
AMRS-780-500	1 3/4" Flange	7/8"	40	Yes

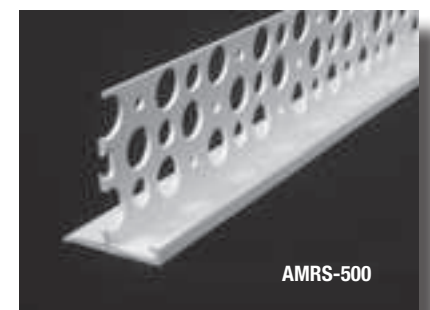

AMRS-500

NOTE: All joints should be embedded in sealant and sealed after installation if necessary.