AMICO ALABAMA METAL INDUSTRIES CORPORATION

TILATH® FLAT PAPER BACKED EXPANDED METAL LATH 3.4 lbs/yd²

With Factory Applies Grade D, Style 2, Asphalt Saturated Paper

Galvanized Steel meeting ASTM C847

SCOPE

This submittal covers carbon steel hot dip galvanized G-60 finish expanded metal diamond lath with paper backing and designed to be used as a base for gypsum or portland cement plaster.

DESCRIPTION

Minimum thickness of expanded metal lath

1. Diamond expanded metal lath: 1/8-inch

Minimum sheet dimensions - inches

- 1. All styles Length of Sheet: 97-inches (Minimum)
- 2. All styles Width of Sheet: 27-inches (Minimum)

Nominal weights of lath (for U.S.) - lbs/yd² Tilath Paper Backed Flat Expanded Metal Lath weighing 3.4 lbs/yd²


The weights listed above are only for the metal lath and do not take into consideration the weight of the moisture barrier paper backing if so specified. The weight of the paper adds to the overall weight of the sheet of lath.

Permissible Variations - inches

Thickness: ±1/64 inch
 Width: -0, +3/8-inch
 Length: -0 +1½-inch
 Weight: ± 10%

FINISH

AMICO expanded metal lath is manufactured from hot dip galvanized G-60 steel sheet that is further processed forming the diamond shaped pattern.

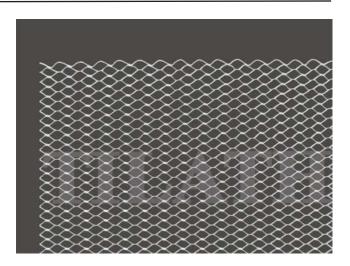

PAPER BACKING FOR LATH

The Grade D paper backing factory applied by the manufacturer provides one of the two layers of moisture barrier required by codes and standards. AMICO paper meets ASTM C1063 and Federal Specification UU-B-790a.

PACKAGING AND PACKAGE MARKING

Metal Lath is packaged 10 sheets per bundle and 25 bundles per pallet. Each factory pallet shall be marked with manufacturer's name, and style of lathing material, lath weight and country of origin.

CERTIFICATION

At time of order a certification that products meets the requirements of ASTM C847 shall be provided.

AMICO LATH MEETS THE FOLLOWING SPECIFICATIONS

ASTM C847 - Standard Specification for Expanded Metal Lath

ASTM A653 - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) by the hot-dip process

Federal Specification UU-B-790a - Moisture Resistant Building Papers, Type 1, Grade 2, Style 2

Made in the United States of America

All information contained herein is accurate as known at the time of publication. Specifi cations may change and AMICO reserves the right to change product specifi cations without notice and without incurring obligations.

ALABAMA METAL INDUSTRIES CORPORATION

3245 Fayette Avenue ◊ Birmingham, AL 35208 ◊ Telephone 800/366-2642 ◊ Facsimile 205/786-6527

