X-66 CASING BEAD Stainless Steel Grade 304 Expanded Metal Plaster Stop

FOR STUCCO AND PLASTER INSTALLATIONS Casing Bead is used to terminate plaster or stucco around doors, windows and any other through wall penetration. Select the proper ground to aid in screeding the proper thickness of stucco.


Product Submittal	Product Number	Ground
	X-66	3⁄4"
additional Grounds available upon request		
Standard Package Length is 10-ft.		


DESCRIPTION

2012

One piece casing bead with a 3-inch wide expanded metal mesh flange. Pre-drilled for proper attachment to wood and metal framing members.

Stainless steel lath and accessories can be used with various substrates: sheathing, CMU, cast-in-place Longer life than Galvanized Steel and Zinc Alloy – Maximum Corrosion Protection

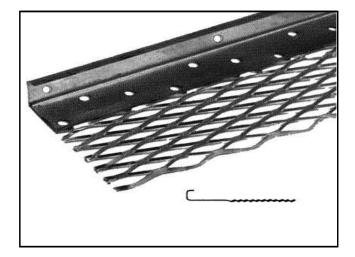

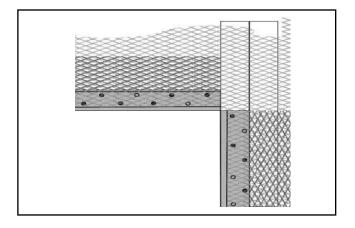

Refer to ASTM C1063 for support spacing, lath selection, fastener selection and further information regarding the proper installation of metal lath.

ASTM and most codes require hot dipped galvanized lath for all exterior applications. Stainless steel lath and accessories provides longer life and more resistance to corrosive environments.

Made in the United States of America

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

ALABAMA METAL INDUSTRIES CORPORATION

3245 Fayette Avenue \diamond Birmingham, AL 35208 \diamond Telephone 800/366-2642 \diamond Facsimile 205/786-6527 email fmayer@gibraltar1.com



a gibraltar industries company ∧