



103 BOND N' PRIME ASPHALT PRIMER

TECHNICAL DATA SHEET



MIAMI-DADE COUNTY
APPROVED

TYPICAL PHYSICAL & PERFORMANCE CHARACTERISTICS:

Weight Per Gallon	7.4-7.9 lb.
Residue be Evaporation, %	60 min.
Consistency	Brush or Spray
Tack Time (50% Relative Humidity, 70 °F)	30 min.
Full Cure (50% Relative Humidity, 70 °F)	24 - 48 hours
Application Temperatures	35°F - 120°F
Spray Info	100-500 PSI .019-.031 Tip Size 0.5-2.0 GPM

Approx. Shipping Weights:

(Note: All approx. weights include container)

1 gallon (3.4L)	8 lb.
5 gallons (18.9L)	40 lb.
14 oz Spray Can	1 lb.

VOC: 350 g/L max. (regulatory)

DESCRIPTION:


APOC® 103 Bond N' Prime Asphalt Primer is a professional grade primer formulated with a high penetrating solvent and select asphalt. It is designed to promote superior adhesion of roofing materials. APOC® 103 can be used to prime newly laid concrete or cement decks, gypsum, masonry thermal insulation and weathered roofing prior to applying built-up roofing. APOC® 103 can also be applied to weathered roofing prior to application of black or reflective aluminum coatings. Allow primer to cure 30 days prior to application of reflective coatings.

PREPARATION:

All surfaces must have proper drainage and be clean, dry and free of surface rust and any other foreign matter. Repair all problem areas with an approved APOC® Cement and Reinforcing Fabric. MIX THOROUGHLY. DO NOT HEAT OR THIN. DO NOT APPLY IF RAIN IS EXPECTED WITHIN 24 HOURS.

APPLICATION:

Apply on clear sunny day when surface temperatures are between 35 °F and 120 °F. In colder weather product should be stored in heated room (65 °F to 80 °F) at least 24 hours prior to application. For exterior use only. Protective clothing, gloves, and eyewear should be used during application of these products. Apply with professional airless sprayer, brush or roller. Work material to a smooth and even consistency. Avoid excessive build up or puddles of primer. DO NOT APPLY TO ASPHALT DRIVEWAYS.

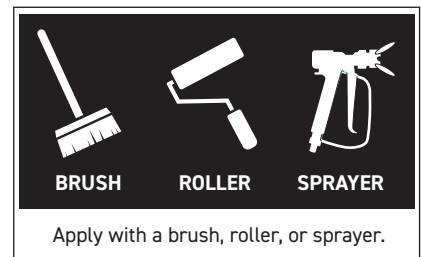

COVERAGE RATE:

(May vary depending on texture of surface)
Approximately .25 - 1 gal. per 100 sq. ft.

CLEAN-UP:

Paint thinner, mineral spirits

STORAGE & HANDLING PRECAUTIONS:

When transporting this product, ensure that lid is tight and pail secure and upright. Do not allow pail to tumble as this may cause lid to loosen and leakage to occur. Do not transport on passenger seats or inside the passenger compartment of any vehicle. Store product in the cargo area of vehicle, and secure over protective cloths to prevent damage due to accidental spills. Do not store at temperatures above 110 °F. This manufacturer also disclaims liability for flat surface application where poor drainage or moisture may prevail. Do not reuse empty containers. Do not use in drinking water or food systems. Product safety information required for safe use is not included. Before handling, read product safety data sheets and container labels for safe use and for physical and health hazard information. Safety Data Sheets are available on the APOC website at www.apoc.com. You can also obtain a copy from your local APOC Distributor or APOC sales representative.



103 BOND N' PRIME ASPHALT PRIMER

TECHNICAL DATA SHEET

PERSONAL PROTECTIVE EQUIPMENT



EYEWEAR



PROTECTIVE
CLOTHING



GLOVES

WARRANTY & DISCLAIMER:

Register your warranty for extended warranty terms within 60 days of the completion of the project at www.apoc.com/pages/warranty. APOC Roofing Systems, LLC hereby warrants to the original purchaser, contingent upon original proof of purchase, that this product will be free from any defects that may materially and adversely affect the product's performance for a period of one year from the date of original purchase.

Gardner-Gibson, Inc.

4161 East 7th Avenue, Tampa, FL 33605
1.800.237.1155 | www.icpgroup.com | C25

