



200 NON-FIBERED ROOF & FOUNDATION COATING

TECHNICAL DATA SHEET



DESCRIPTION:


APOC® 200 Non-Fibered Roof & Foundation Coating is a professional grade coating to be applied with a brush, roller or professional sprayer. It is manufactured with select asphalt and solvent to provide a durable and protective finish. APOC® 200 provides an anti-corrosive coating on metal, concrete and asphalt surfaces and can be used for roofs, pipes, foundation and other substrates. APOC® 200 is also an excellent penetrator and sealer for a variety of exterior concrete and masonry surfaces and can be used as a component in below grade waterproofing and dampproofing systems.

PREPARATION:

All surfaces must have proper drainage and be clean, dry and free of surface rust and any other foreign matter. Repair all problem areas with an approved APOC cement and reinforcing fabric. MIX THOROUGHLY. DO NOT HEAT OR THIN. DO NOT APPLY IF RAIN IS EXPECTED WITHIN 24 HOURS.

APPLICATION:

Apply on clear sunny day when surface temperatures are between 35 °F and 120 °F. For temperatures below 50 °F product should be stored in heated room (65 °F to 90 °F.) at least 24 hours prior to application. We also highly recommend application of a reflective coating after a minimum of 45 days cure time. This will greatly extend the life of the roof. For exterior use only. Protective clothing, gloves, and eyewear should be used during application of this product. Apply using professional airless sprayer, brush or 1/2" to 3/4" nap roller. Form a thin and continuous film. Avoid heavy mounds of mass accumulation. For above and below grade foundations ensure all pin holes are filled with coating; apply second coat at right angles to first coat. For waterproofing systems and applications, contact manufacturer for written requirements & specifications. If applied with sprayer, use only a high quality, professional sprayer. Allow minimum of 6 hours between coats and at least 36 hours drying time prior to backfilling. Do not apply to roofs with slopes greater than 1/4" per foot.

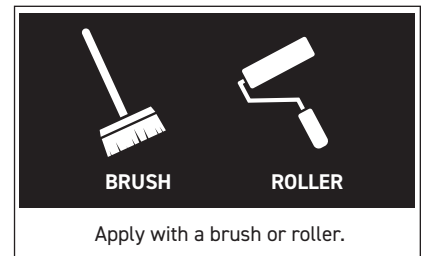

TYPICAL PHYSICAL & PERFORMANCE CHARACTERISTICS:

Weight Per Gallon	7.5-8.0 lb.
Residue be Evaporation	65 min.
Consistency	Spray or Brush
Application Temperatures	50°F - 120°F
Spray Info	1500-2000 PSI .055 Tip Size 1.5-2.0 GPM

Approx. Shipping Weights:

(Note: All approx. weights include container)

5 gallons (18.9L)	40 lb.
55 gallon drum (208.2L)	480 lb.

COVERAGE RATE:

(May vary depending on texture of surface)

Concrete/Masonry Surfaces: 1.0 - 1.5 gal. per 100 sq. ft.

Smooth/Built-up Roofs: 1.0 gal. per 100 sq. ft.

CLEAN-UP:

Paint thinner or mineral spirits.

PRECAUTIONS:

This product contains solvents. When working around ventilation units or HVAC equipment, ensure proper fume mitigation procedures are taken to avoid fumes and / or odors from entering air handling equipment and building. When transporting this product, ensure that lid is tight and pail secure and upright. Do not allow pail to tumble as this may cause lid to loosen and leakage to occur. Do not transport on passenger seats or inside the passenger compartment of any vehicle. Store product in the cargo area of vehicle, and secure over protective cloths to prevent damage due to accidental spills. Do not store at temperatures above 110°F. This manufacturer also disclaims liability for flat surface application where poor drainage or moisture may prevail. Do not reuse empty containers. Do not use in drinking water or food systems. Seal container when not in use.

VOC: 300 g/L max. (regulatory)





200 NON-FIBERED ROOF & FOUNDATION COATING

TECHNICAL DATA SHEET

PERSONAL PROTECTIVE EQUIPMENT



EYEWEAR



PROTECTIVE
CLOTHING



GLOVES

STORAGE & HANDLING PRECAUTIONS:

Product safety information required for safe use is not included. Before handling, read product safety data sheets and container labels for safe use and for physical and health hazard information. Material safety data sheets are available on the APOC website at www.apoc.com. You can also obtain a copy from your local APOC Distributor or APOC sales representative.

WARRANTY & DISCLAIMER:

Register your warranty for extended warranty terms within 60 days of the completion of the project at www.apoc.com/pages/warranty. APOC Roofing Systems, LLC hereby warrants to the original purchaser, contingent upon original proof of purchase, that this product will be free from any defects that may materially and adversely affect the product's performance for a period of one year from the date of original purchase.

