


Waterproof & Protective Coatings

Concrete Restoration

Moisture Vapor Mitigation & Self-Leveling Underlayments & Toppings

Injection Grouting

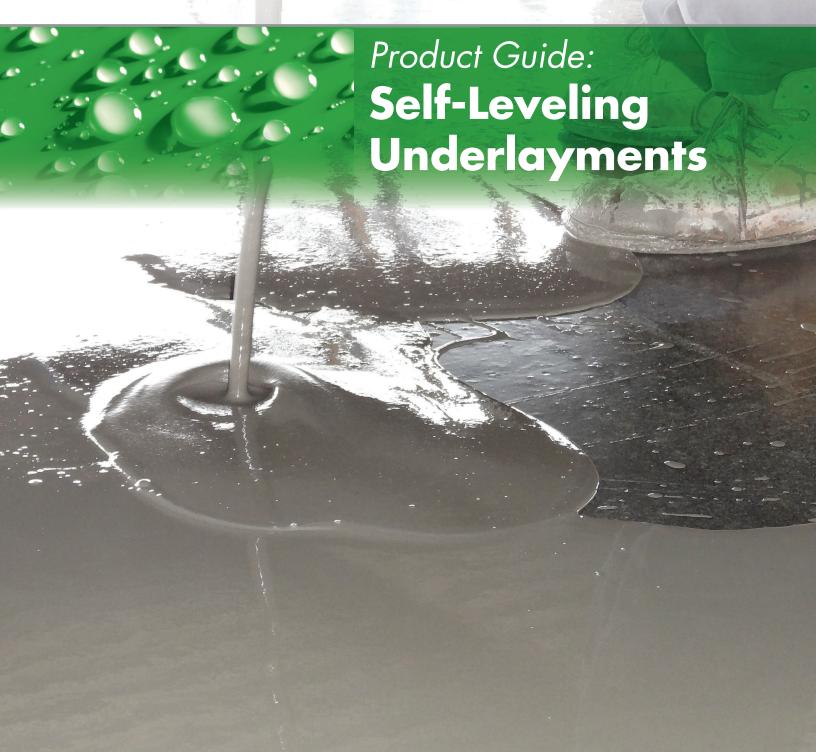

Self-Leveling and Toppings

The AQUAFIN line of self leveling underlayments and toppings provide solutions to not only get the job done right, but with time to spare! Combining technologies allows for ultra-fast turn around times and accelerated construction schedules when dealing with new construction.



SLU-Primer

High performance primer for porous and non-porous substrates

- Zero VOC's meets LEED criteria
- Rapid drying
- Excellent bond
- Ready to use
- 1-Coat application

EPOXY-Primer

100% solids, zero VOC, moisture tolerant, all purpose epoxy primer

- Zero VOC's meets LEED criteria
- Excellent for indoor use low odor, non flammable
- 1-Coat application
- Can be applied to dry or damp substrates
- Excellent for sealing dormant static hairline cracks

Self-Leveling

LEVEL-One

Cementitious self-leveling underlayment

- High strength
- For interior use
- Walk on within 4 hours, many floor coverings within 16 24 hours
- Installs from 1/8" 11/4" (3 30 mm)
- Compatible with radiant floor heating

LEVEL-Ultra

Moisture tolerant, calcium aluminate, cementitious self-leveling underlayment

- Moisture tolerant! Use both interior and exterior
- High strength
- Walk on within 4 hours; install most floor coverings within 16 - 24 hours
- Installs from 1/8" 1-1/4" (3 31.5 mm)
- Compatible with radiant floor heating







Complementary Products

Level-Patch-FF

Rapid setting, horizontal concrete floor finish

- Apply from featheredge to 3/8" (9.5 mm)
- Provides good bond surface for floor covering adhesives
- Mixes easily to a smooth creamy consistency
- Allows for ultra thin patching, smoothing out transitions between self leveling pours
- One component just add water
- Rapid setting; ready for most floor-covering applications in 15–20 minutes

MORTAR-QuickPatch

One-component, rapid setting horizontal patching mortar & resurfacer

- Featheredge to 3" (75mm)
- Perfect for thin patching, resloping transitions and ramping for ADA compliance
- Use to fill bird baths in slabs and pitch towards drains
- Outstanding workability and ease of placement
- Fast setting walk on in approximately one hour
- Can be covered with many floor coverings within 16 24 hours

MORTAR-Screed

One-part, polymer-modified, concrete screed and repair mortar

- For screed repairs and overlays up to 5" (127 mm) neat
- To repair spalls and voids in floors, also to fill conduit and plumbing trenches
- Fiber reinforced, low shrinkage
- Wide consistency range from semi-dry to plastic

FAST TRACK

Combining Aquafin product technologies can provide significant time and money savings on new construction projects:

- **1.** 5 days after concrete placement install VAPORTIGHT COAT-SG3
- 2.12 24 hours later install SLU-Primer
- 3. Hours later pour the moisture tolerant LEVEL-Ultra

Result: Flat floors allow other trades to work off of a level base, trickeling time savings throughout the construction process.







AQUAFIN Inc. was founded in January 1989 and is a member of the SCHOMBURG Group.

AQUAFIN offers a full range of products to repair, protect, waterproof and vaporproof concrete, masonry, brick, and stone substrates.

In addition to providing the highest quality products we are dedicated to supporting our clients with technical expertise and practical know how gained over many years of on-the-job experience.

AQUAFIN products are for professional use only, not for sale to or use by the general public.

