

ARDEX A 38™ MIX

Rapid Set, Premixed Screed

Precision-engineered and polymer-modified, ARDEX A 38™ MIX Rapid Set, Premixed Screed sets, hardens and dries rapidly - just 3 hours after application. It is ideal for swimming pools and other wet areas and for use with in-floor heating systems. ARDEX A 38 MIX is premixed with sand for increased productivity.

Key Features

- Set tile in just 4 hours
- Install wood or vinyl in 48 hours
- Interior and exterior use
- Suitable for bonded, unbonded or floating screeds
- Exceeds the 28-day strength properties of ordinary screeds after just 1 day



Also available: ARDEX A 38™ Rapid Set Screed (not premixed) in 50 lb. (22.7 kg)
Add ARDEX E 100™ Screed Improvement and Bonding Slurry Additive to ARDEX A 38 for bonding slurry or as an additive for basic screeds to improve elasticity, strength and workability.

Installation

- **Package:** Available in 40 lb. (18 kg) bags
ARDEX A 38 MIX thickness requirements will depend on the type of application.

| Screed Type | Minimum Thickness | Maximum Thickness |
|------------------------|-------------------|-------------------|
| Bonded | 3/4" (18 mm) | 1.5" (40 mm) |
| Unbonded | 1.5" (40 mm) | None |
| Floating (Residential) | 2.5" (60mm) | None |
| Floating (Commercial) | 3" (75 mm) | None |


Performance

Compressive Strength (ASTM C109/mod – Air cure only):

6,300 psi (441kg/cm²) at 28 days

Flexural Strength (ASTM C348):

775 psi (54 kg/cm²) at 28 days

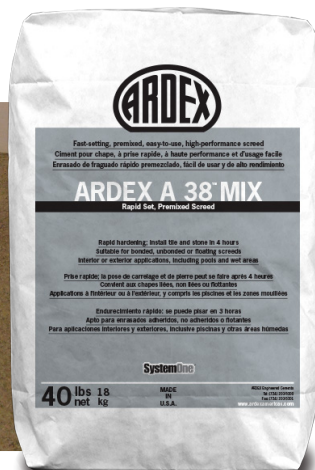

For easy-to-use ARDEX Product Calculators and Product Information On the Go, download the ARDEX App at the iTunes Store or Google play.



Refer to the technical data sheet at www.ardexamericas.com or call 888-512-7339 prior to installation. For free ARDEX product training, click on ARDEX Academy.

SUBSTRATE
PREPARATION

AF430 03/15



AMERICAS

888-512-7339

+1-724-203-5000

www.ardexamericas.com