

# ARDEX CD™

## Concrete Dressing

ARDEX CD™ is a concrete resurfacing compound modified with high-performance polymers for exceptional bond strength. Formulated from a blend of Portland cement and other hydraulic cements, ARDEX CD can be used over the surface of existing concrete to produce a new wear layer as well as to fill in small surface defects. ARDEX CD can be applied by trowel, squeegee or hopper gun. ARDEX CD can be broom textured before it sets for a reduced-slip surface.

### Key Features

- **Mixes with water only**
- **Easy to apply**
- **Installs 1/16" up to 1/8" (1.5 to 3 mm)**
- **ARDEX CD can be mixed to apply at a thickness of up to 1/2" (12 mm) for minor patching**
- **Use for interior and exterior floors and walls**
- **Suitable for foot and rubber tire traffic on commercial and residential applications**
- **Available in gray or white, coarse or fine finish**




### Installation

- **Packaging:** 40 lb bag (18 kg)
- **Coverage:** up to 120 sq. ft. per bag at 1/16" (11.1 sq. m at 1.6 mm)
- **Pot life:** 30 minutes
- **Walkable:** 2 hours
- **Coat or seal:** 2 hours

### Performance

- **ASTM C109 (air mod) Compressive Strength:** 4,000 psi (280 kg/cm<sup>2</sup>) at 28 days
- **VOC:** 0

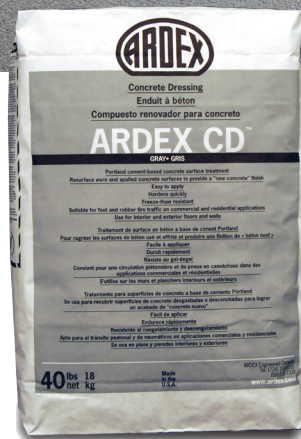

ENGINEERED CONCRETE  
REPAIR SYSTEMS



AMERICAS

+1-724-203-5000  
888-512-7339

[www.ardexamericas.com](http://www.ardexamericas.com)