


# ARDEX K 22 F™

High Flow, Fiber Reinforced,  
Self-Leveling Underlayment

▶▶ CHOOSE FIBER  
REINFORCED

<b>Low Prep:</b>	Excellent on challenging substrates
<b>Fiber Reinforced:</b>	For superior performance
<b>High Flow:</b>	Allows for easy installation
<b>High Compressive Strength:</b>	6,000 psi (420 kg/cm <sup>2</sup> )
<b>Coverage:</b>	50 sq. ft. per bag at 1/8" (4.5 m <sup>2</sup> at 3 mm)
<b>Thickness:</b>	Install from 1/8" (3 mm) to 1 1/4" (3 cm) thick neat and up to 2" (5 cm) with aggregate
<b>Install:</b>	Floor coverings in as little as 24 hours

For complete technical documentation, please see the Technical Data Sheet at [www.ardexamericas.com](http://www.ardexamericas.com)

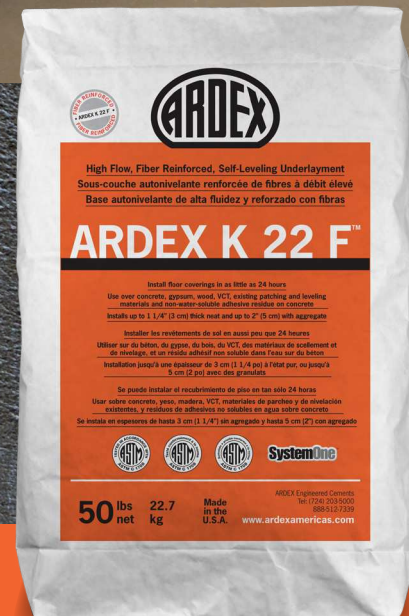

ARDEX Americas  
400 Ardex Park Drive  
Aliquippa, PA 15001  
888-512-7339

[www.ardexamericas.com](http://www.ardexamericas.com)

50 lbs net

22.7 kg

Made in the U.S.A.

ARDEX Engineered Concrete  
Tel: (724) 233-9000  
800.512.7339  
[www.ardexamericas.com](http://www.ardexamericas.com)