

# ARDEX PANDOMO® CF1/CF3

## Floor and FloorPlus Leveling Compound (White or Gray)

*Self-drying topping for fast-track resurfacing, smoothing and leveling of indoor concrete. Formulated with hydraulic cements, along with special re-dispersable powdered polymers.*

### Key Features


- Portland cement-based
- Use over new or existing interior concrete
- Color with ARDEX PANDOMO® CC Color Concentrates
- Add ARDEX PANDOMO® HG Sand to create ARDEX PANDOMO® FloorPlus surfaces. Sand colors available: Black, White, Gray and Sable

### Installation

- **General priming recommendations:**
  - ARDEX EP 2000™ Substrate Preparation Epoxy Primer
- **Packaging:** 50 lbs. (22.7 kg)
- **Coverage:** 25 ft<sup>2</sup> per bag at 1/4" (2.3 m<sup>2</sup> at 6 mm)
- **Thickness:**
  - Install from 1/4" to 1" (6 to 24 mm)
- **Flow Time:** 10 minutes
- **Walkable:** 2 to 3 hours
- **Begin Processing:** 24 hours
- **Seal with ARDEX PANDOMO® ES/PS Protective Wear Layer System**

### Performance

- **ASTM C191 Initial Set:** Approx. 10 minutes
- **ASTM C191 Final Set:** Approx. 45 minutes
- **ASTM C109 mod (air cure only) Compressive Strength:** 5000 psi (352 kg/cm<sup>2</sup>) at 28 days
- **ASTM C348 Flexural Strength:** 1000 psi (70 kg/cm<sup>2</sup>) at 28 days

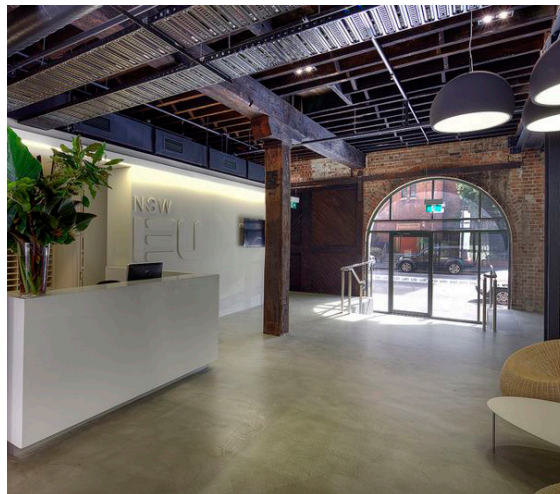

AF396 06/15

For easy-to-use ARDEX Product Calculators and Product Information On the Go, download the ARDEX App at the iTunes Store or Google play.



Refer to the technical data sheet at [www.ardexamericas.com](http://www.ardexamericas.com) or call 888-512-7339 prior to installation. For free ARDEX product training, click on ARDEX Academy.

© 2014 ARDEX Engineered Cements, L.P. All rights reserved.

# PANDOMO®



AMERICAS

888-512-7339

+1-724-203-5000

[www.ardexamericas.com](http://www.ardexamericas.com)