

ARDEX PANDOMO® CF1/CF3

Floor and FloorPlus Leveling Compound (White or Gray)

Self-drying topping for fast-track resurfacing, smoothing and leveling of indoor concrete. Formulated with hydraulic cements, along with special re-dispersable powdered polymers.

Key Features


- Portland cement-based
- Use over new or existing interior concrete
- Color with ARDEX PANDOMO® CC Color Concentrates
- Add ARDEX PANDOMO® HG Sand to create ARDEX PANDOMO® FloorPlus surfaces. Sand colors available: Black, White, Gray and Sable

Installation

- **General priming recommendations:**
 - ARDEX EP 2000™ Substrate Preparation Epoxy Primer
- **Packaging:** 50 lbs. (22.7 kg)
- **Coverage:** 25 ft² per bag at 1/4" (2.3 m² at 6 mm)
- **Thickness:**
 - Install from 1/4" to 1" (6 to 24 mm)
- **Flow Time:** 10 minutes
- **Walkable:** 2 to 3 hours
- **Begin Processing:** 24 hours
- **Seal with ARDEX PANDOMO® ES/PS Protective Wear Layer System**

Performance

- **ASTM C191 Initial Set:** Approx. 10 minutes
- **ASTM C191 Final Set:** Approx. 45 minutes
- **ASTM C109 mod (air cure only) Compressive Strength:** 5000 psi (352 kg/cm²) at 28 days
- **ASTM C348 Flexural Strength:** 1000 psi (70 kg/cm²) at 28 days

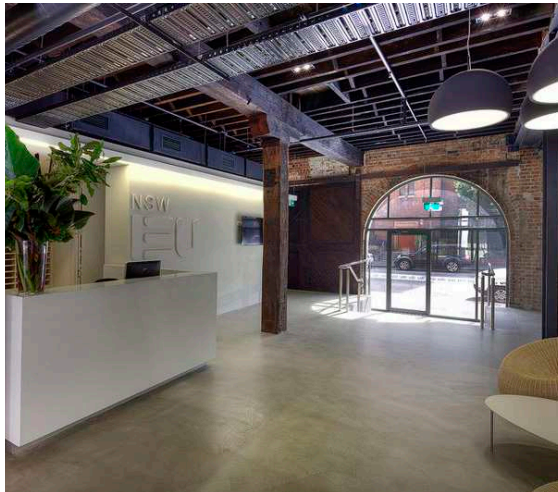

AF396 06/15

For easy-to-use ARDEX Product Calculators and Product Information On the Go, download the ARDEX App at the iTunes Store or Google play.



Refer to the technical data sheet at www.ardexamericas.com or call 888-512-7339 prior to installation. For free ARDEX product training, click on ARDEX Academy.

© 2014 ARDEX Engineered Cements, L.P. All rights reserved.

PANDOMO®



AMERICAS

888-512-7339

+1-724-203-5000

www.ardexamericas.com