

# ARDEX V 1200™

## Self-Leveling Underlayment

**Choose The Workhorse™** - ARDEX V 1200™ is the trusted leveler for big jobs on tight schedules.

**Install over:** interior concrete, terrazzo, ceramic and quarry tile, epoxy coating systems and non-water soluble adhesive residues on concrete

### Key Features



- Pourable with the ROVER® Rolling Barrel Cart; Pumpable with the AMP® Automatic Mixing Pumps
- Interior use
- Use on, above or below grade
- Mixes with water

### Installation

- **General priming recommendations:**
  - Concrete: ARDEX P 51™ Primer
  - Most non-porous substrates, epoxy coatings, adhesive residue: ARDEX P 82™ Ultra Prime
- **Packaging:** 50 lb. (22.7 kg)
- **Coverage:** 25 sq. ft. per bag at 1/4" (2.3 m<sup>2</sup> at 6 mm)
- **Thickness:**
  - Levels at 1/4" (6 mm)
  - Installs from 1/8" to 1 1/4" (3 mm to 3 cm)
  - Can be tapered
- **Flow time:** 10 minutes
- **Walkable:** 2 to 3 hours
- **Install floor coverings:**
  - For installations up to 3/8" (0.95 cm):
    - Moisture-insensitive tile (ceramic, quarry, porcelain): 6 hours
    - Porous-backed carpet: 12 hours
    - Non-porous backed carpet, vinyl sheet/tile/plank, rubber, linoleum: 24 hours
  - For installations more than 3/8" (0.95 cm):
    - Moisture-insensitive tile (ceramic, quarry, porcelain): 6 hours
    - Porous-backed carpet: Mat test
    - Non-porous backed carpet, vinyl sheet/tile/plank, rubber, linoleum: Mat test
  - All other coverings: Mat test

### Performance

- **ASTM C191 Initial Set:** Approx. 30 minutes
- **ASTM C191 Final Set:** Approx. 90 minutes
- **ASTM C109 mod (air cure only) Compressive Strength:** 4500 psi (315 kg/cm<sup>2</sup>) at 28 days
- **ASTM C348 Flexural Strength:** 1000 psi (70 kg/cm<sup>2</sup>) at 28 days
- **VOC:** 0

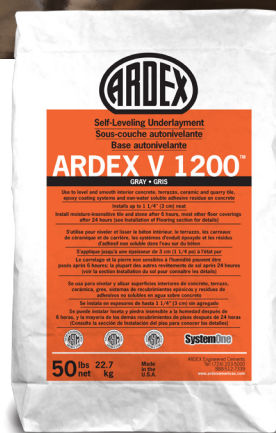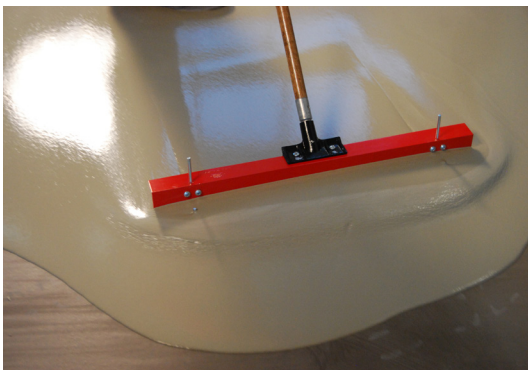

**SystemOne**

AF157 03/15

SUBSTRATE  
PREPARATION

CHOOSE  
**YOUR**  
SOLUTION



**AMERICAS**

888-512-7339

+1-724-203-5000

www.ardexamericas.com

For easy-to-use ARDEX Product Calculators and Product Information On the Go, download the ARDEX App at the iTunes Store or Google play.



Refer to the technical data sheet at [www.ardexamericas.com](http://www.ardexamericas.com) or call 888-512-7339 prior to installation. For free ARDEX product training, click on ARDEX Academy.

© 2014 ARDEX Engineered Cements, L.P. All rights reserved.