

# ARDEX VR 98™

## Fast-Track, One-Component Moisture Vapor Retarder

ARDEX VR 98™ is a ready-to-use, one-component, water-based, two-coat system formulated to suppress residual moisture in concrete with RH readings up to 98%. ARDEX underlayments may be installed over the second coat in as little as 2 hours without priming. ARDEX VR 98 comes in a ready-to-use, resealable container. It is pigmented blue to help indicate uniform coverage for ease of application.

### Use




- To protect the final floor covering installation
- To suppress residual moisture in concrete
- When RH readings are up to 98%
- When an intact structural vapor barrier membrane is present (for on/below grade slabs)

### Fast track

- **Large unit:** for efficient handling
- **One component:** no parts to mix, ready to use and resealable container
- **No floor profile required:** easy floor preparation
- **Fast drying:** 30 minutes between coats and underlayment in 2 hours
- **No primer needed:** underlayment directly over ARDEX VR 98

### Technical Data

- **Packaging:** 4.25 gal. (16 L) pails
- **Application:** 2 coats of 8 mils each
- **Coverage:** Approx. 425 sq. ft. (39 sq. m) per unit or 100 sq. ft. per gal. (2.4 sq. m per L) at 2 coats of 8 mils each
- **Install underlayment:** 2-24 hours
- **Warranty:** Extended system warranty of 10 years is available

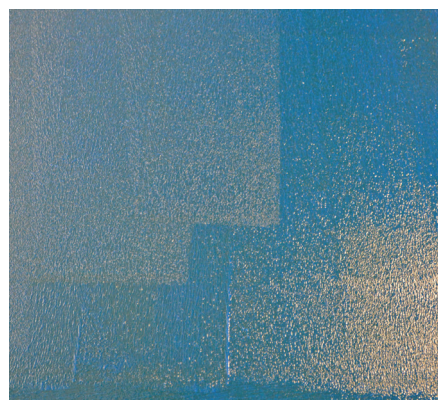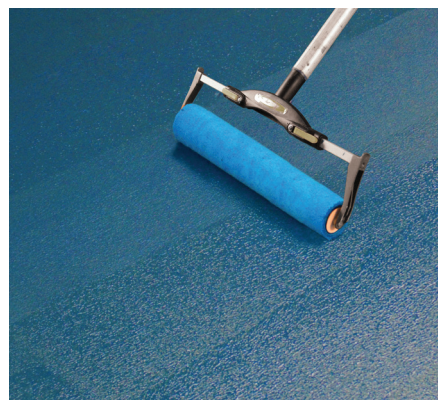

**Fast Track**

Visit [www.youtube.com/ARDEX101](http://www.youtube.com/ARDEX101) to watch ARDEX VR 98™ product demonstration video.

For easy-to-use ARDEX Product Calculators and Product Information On the Go, download the ARDEX App at the iTunes Store or Google Play.



AF 449 08/17

**MOISTURE  
CONTROL SYSTEM**



**AMERICAS**

888-512-7339

724-203-5000

[www.ardexamericas.com](http://www.ardexamericas.com)