


CALLA®  
Vector®  
smooth texture




CAD/Revit® drawings at:  
[armstrongceilings.com/cadrevit](http://armstrongceilings.com/cadrevit)



DESIGNFlex®  
A New World of Choice  
for Ceiling Systems

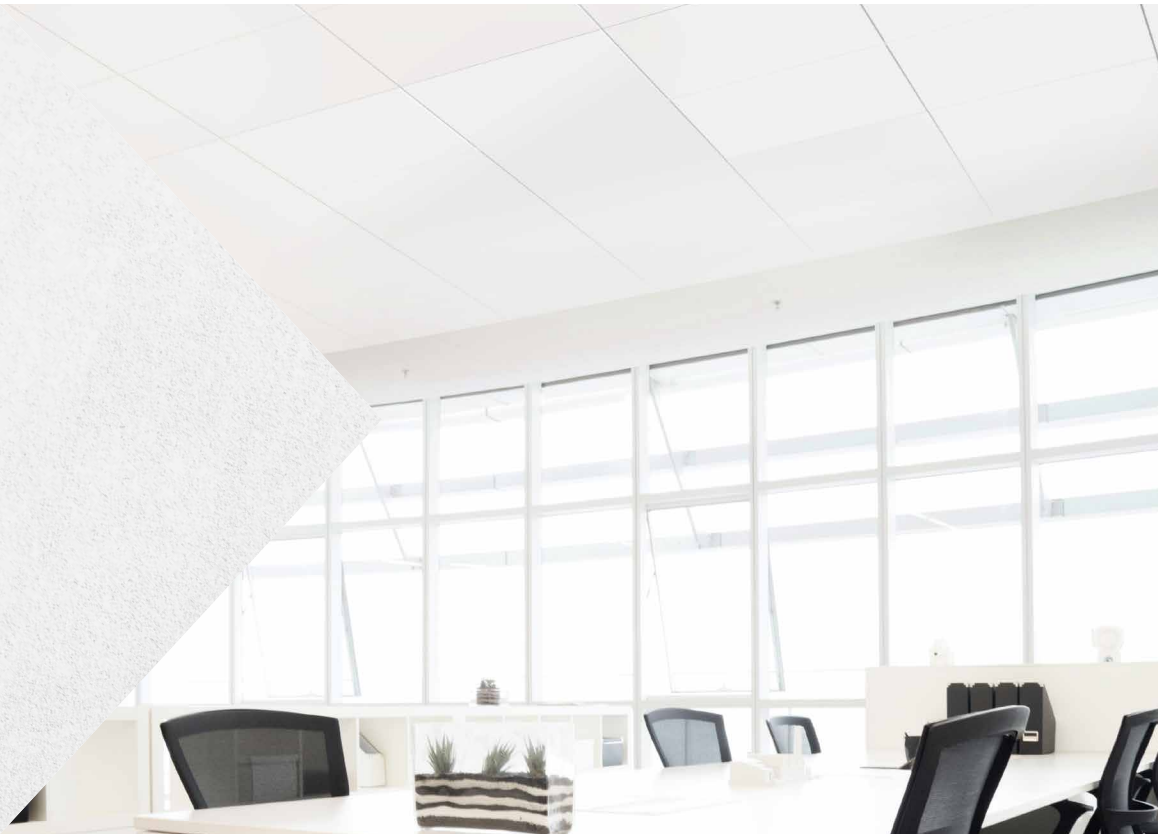

Calla Vector panels with Prelude 15/16" suspension system



[armstrongceilings.com/capabilities](http://armstrongceilings.com/capabilities)  
See more photos at:  
[armstrongceilings.com/photogallery](http://armstrongceilings.com/photogallery)

Smooth, drywall-like finish with a 1/4" reveal and downward accessibility; ideal for projects where plenum space is limited.

**KEY SELECTION ATTRIBUTES**

- DesignFlex® options include made-to-order sizes and colors available to ship in 3 weeks
- Smoothest mineral fiber panel available
- Calla® Vector® panels are part of the Sustain® portfolio, and meet the most stringent industry sustainability compliance standards today
- 1/4" reveal resulting in a monolithic appearance
- Vector Trim Kit in Blizzard White finish for easy installation and bright visual
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim
- Mold- and mildew-resistant surface
- Washable, Scratch-resistant, Soil-resistant
- Excellent sound absorption – NRC 0.80
- Downward accessible for minimal plenum height
- USDA-Certified Biobased Product – 91%
- Product can be recycled through the Armstrong Ceilings Recycling Program
- Made in the U.S.A. of domestic and global content
- Build America, Buy America (BABA) Act compliant
- 30-Year Limited System Warranty against visible sag, mold, and mildew
- Available with factory-cut holes for USA® trimless downlight fixture integration

**COLORS** Due to printing limitations, shade may vary from actual product.




**DETAILS**



1. Calla Vector
2. Calla Vector with Prelude® 15/16" suspension system

These colors are pre-qualified to meet Sustain® portfolio requirements.

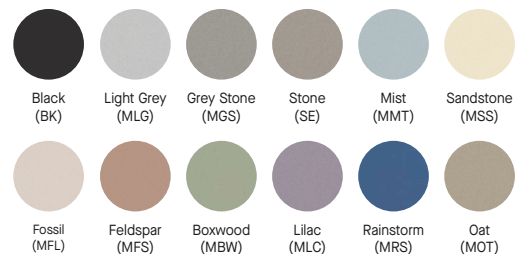

Other made-to-order colors must be evaluated if sustainability criteria is required. Lead time will increase.

CALLA®  
Vector®  
smooth texture

USDA  
CERTIFIED  
BIOBASED  
PRODUCT  
PRODUCT 91%

**SUSTAIN**  
High Performance  
Sustainable Ceiling Systems  
**Declare**

RECYCLED  
CONTENT  
UP TO  
**76%**

**LEED V5**

Ecomedes Data

COMMON MATERIALS FRAMEWORK

Human Health	<b>Declare Label</b>	Climate Health	EPD
	HPD	Ecosystem Health	EPD
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓

VISUAL SELECTION

armstrongceilings.com/suspdwgs	Susp. Dwg.	Item No.	Dimensions (Inches)
CALLA®	73	<b>2814</b>	24 × 24 × 1" □
1/4" Reveal with 15/16" Vector			
		<b>2815</b>	24 × 48 × 1" □

Made-to-Order Sizes	Width (short side)	Length (long side)
Visit the product page online and see "Configure an Item" to verify capabilities. Questions? email <a href="mailto:Techline@armstrongceilings.com">Techline@armstrongceilings.com</a>	4" - 24"	9" - 48"

**1 Ctn Min FASTSIZE 3 WEEKS order to ship**

1" Thick - 15/16" Vector

<sup>1</sup> Total Acoustics® ceiling panels have an ideal combination of sound absorption and sound blocking in one product. **GOOD** (NRC 0.60-0.65; CAC 35+) **BETTER** (NRC 0.70-0.75; CAC 35+) **BEST** (NRC 0.80+; CAC 35+)  
\* Advertised values for light reflectance, wash- and scratch-resistance are applicable to white tiles only

PERFORMANCE SELECTION Dots represent high level of performance.

UL Classified Acoustics	Total Acoustics <sup>1</sup>	Articulation Class	Fire Performance	Light Reflect* <sup>2</sup>	Bio-Block/Mildew	Humi-Guard+	CleanAssure™ Disinfectable Panels	DURABILITY	Recycle Program		
NRC + CAC =		AC	Class				Fog	Wash*	Scratch*	Soil	30-Yr Warranty
0.80	33	N/A	170	Class A	0.85	*	*	*	*	*	*
0.80	33	N/A	170	Class A	0.85	*	*	*	*	*	*
N/A	N/A	N/A	170	Class A	0.85	*	*	*	*	*	*

VECTOR TRIM KITS

Item No.	Color	Length	Substrate	Pcs/Ctn
VETK4ZW	Blizzard White	4"	Steel	24
VETK6ZW	Blizzard White	6"	Steel	24
VETK24ZW	Blizzard White	24"	Steel	24
VETK48ZW	Blizzard White	48"	Steel	24
VETK96ZW	Blizzard White	96"	Steel	24


Made-to-Order Sizes & Colors	Length
Visit the product page online and see "Configure an Item" to verify capabilities. Questions? email <a href="mailto:Techline@armstrongceilings.com">Techline@armstrongceilings.com</a>	4" - 96"

**4-6 WEEKS order to ship**

ACCESSORIES (must be ordered separately)

Item No.	Description	Pcs/Ctn
442	Hold-down Clip for Vector® panels (for all installations)	50
443	Border Clip for Calla® Vector® panels	50
7425	24" Stabilizer Bar	100
7445	48" Stabilizer Bar	100
7870	Spring Border Clip (For installations with the panel resting on the wall molding)	1,000

SUSPENSION SYSTEM



PHYSICAL DATA

**Material**  
Wet-formed mineral fiber with an acoustically transparent membrane

**Surface Finish**  
Acoustically transparent membrane with factory-applied latex paint

**Fire Performance**  
Class A: ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index of 25 or less. Smoke Developed Index of 50 or less (UL\* labeled).

**ASTM E1264 Classification**  
Type A, Form A2.2, Pattern G; Fire Class A

**Humidity/Sag Resistance**  
HumiGuard® Plus ceiling panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

**Anti-Mold/Mildew**  
Ceiling tiles with BioBlock® performance resist the growth of mold and mildew on the tile surface.

**VOC Emissions**  
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard®, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

**Design Considerations**  
Physical product samples for standard and custom colors are available upon request. Please refer to the physical product sample prior to making a final selection. While we strive to ensure exact color matches, various factors such as differences in materials, texture, substrate porosity, painting processes, lighting, and observer subjectivity can all affect how paint colors appear on ceiling and wall panels, suspension systems, and trim products.

Due to these and other differences, ceiling and wall panels, trim products, and suspension systems with the same color name will coordinate but may not be an exact color match. Product is dye-lotted. Order sufficient initial quantities and attic stock to minimize possible color variation.

**Acoustical Performance**  
CAC testing conducted using Prelude® suspension system.

**High Recycled Content**  
Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

**Insulation Value**  
R Factor - 2.9 (BTU units); R Factor - 0.445 (Watts units)

**Cleaning and Disinfecting**  
Cleaning and CDC-recommended disinfecting options available on [armstrongceilings.com/cleaning](http://armstrongceilings.com/cleaning)

**30-Year Performance Guarantee & Warranty**  
When installed with Armstrong® Suspension System. Details at [armstrongceilings.com/warranty](http://armstrongceilings.com/warranty)

**Weight; Square Feet/Carton**  
2814 - 1.0 LBS/SF; 40 SF/CTN  
2815 - 1.0 LBS/SF; 48 SF/CTN

**Minimum Order Quantity**  
1 carton

LEED® is a trademark of the U.S. Green Building Council; Declare® and Living Building Challenge® (LBC) are registered trademarks of the International Living Future Institute®; WELL™ and Well Building Standard are trademarks of the International WELL Building Institute; UL is a registered trademark of UL LLC; USAI Lighting is a trademark of USAI Lighting, LLC; Revit® is a registered trademark of Autodesk, Inc.; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2026 AWI Licensing LLC

TechLine / 1 877 276-7876  
[armstrongceilings.com/calla](http://armstrongceilings.com/calla)  
BPCS-5676-226

**Armstrong®**  
World Industries

MINERAL FIBER - Standard

