FRAMEALL® Drywall Grid Moldings

Knurled Angle Molding
Locking Angle Molding
SimpleCurve®

A FrameAll® Drywall Grid Solution

SUSTAIN™
High Performance Sustainable Ceiling Systems

FRAMEALL® DRYWALL GRID – Standard

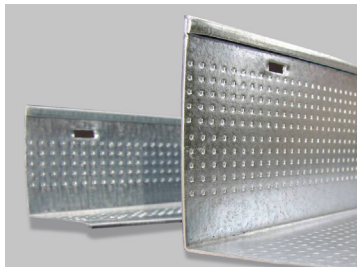

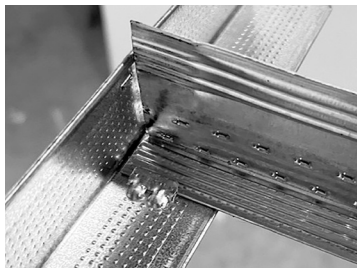

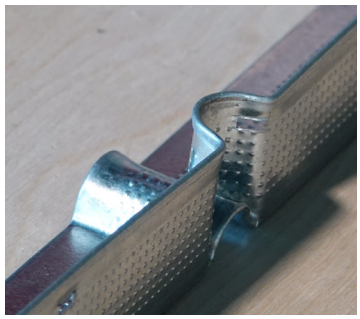

SimpleCurve Knurled Angle Molding, part of the FrameAll® Drywall Grid family of products

SimpleCurve KAM is a pre-engineered molding that eliminates field modifications and form curves as tight as 32" radius.

MADE IN THE USA

KEY SELECTION ATTRIBUTES

- Hemmed edges are easier to handle than standard "shiny ninety" framing angle
- Easier to install – prepunched holes on the top edge and ScrewStop™ reverse hem catch screws, preventing slip off
- KAM Angles have simple packaging that makes cutting to length easy
- Packaged 10 pcs/bundle
- FrameAll® Drywall Grid is part of the Sustain™ portfolio and meets the most stringent industry sustainability compliance standards today
- Sourced and manufactured in the USA

KAM

- All Angle products meet true and actual gauge specifications according to ASTM C645
- Available in popular 1-1/4", 1-1/2", and 2" sizes in the right gauges for your project

LAM

- Pre-engineered locking tabs punched 8" on center:
  - Eliminate measuring 16" or 24" O.C.
  - Locking tabs prevent lateral and upward movement
  - Eliminate screws, pop rivets, or crimpers needed to attach cross tees to molding
- Knurled surface on both flanges
- ScrewStop™ reverse hem
- Crimp marks at locking tabs for fast, easy alignment and layout
- NEW LAM for Soffits available to speed up soffit installations

SimpleCurve®

- Available in 1-1/2" and 2" sizes in the right gauges for your project
- Bend to create curves as tight as 32" radius
- Overlap end-to-end for continuous curves without visible transitions

MATERIALS

Meets ASTM A653 for zinc-coated hot dipped galvanized steel. Surfaces are chemically cleansed, zinc-coated, and prefinished. Materials also conform to the performance standard ASTM C645 (Standard Specification for Rigid Furring Channels for Screw Applications of Gypsum Board) and ASTM C635 for Specification for manufacturing and performance of Metal Suspension systems.

TechLine 877 276-7876
armstrongceilings.com/frameall

Armstrong® World Industries

FRAMEALL® Drywall Grid Moldings

Knurled Angle Molding
Locking Angle Molding
SimpleCurve®

SUSTAIN® High Performance Sustainable Ceiling Systems

Declare.

LEED® WELL™ LBC

UP TO 61% RECYCLED CONTENT

Calculate sustainability with Ecomedes armstrongceilings.com/ecomedes

energy management	construction waste mgmt	regional materials	design for flexibility	EPD	recyclable/ extended producer resp.	biobased materials	recycled content	sourcing of raw materials	material ingredient reporting	low emitting/ materials	lighting quality	acoustics
	✔	✔	✔				✔	✔				

▲ LOCATION DEPENDENT

Well Building Standard™ (WELL)
Living Building Challenge® (LBC)

VISUAL SELECTION

PACKAGING

	Item No.	Length	Height	Metal Thickness	PCS/ CTN	LF/ CTN
Knurled Angle Molding 	**KAM10**	120"	1-1/4"	0.018"	10	100
	KAM12	144"	1-1/4"	0.018"	10	120
	KAM12G90	144"	1-1/4"	0.018"	10	120
	KAM1510	120"	1-1/2"	0.018"	10	100
	KAM1512	144"	1-1/2"	0.018"	10	120
	KAM151020E	120"	1-1/2"	0.028"	10	100
	KAM151220E	144"	1-1/2"	0.028"	10	120
	KAM151020	120"	1-1/2"	0.033"	10	100
	KAM1525G90	120"	1-1/2"	0.018"	10	100
	KAM1520G90	120"	1-1/2"	0.033"	10	100
	KAM21025	120"	2"	0.018"	10	100
	KAM21020EQ	120"	2"	0.028"	10	100
	KAM21020	120"	2"	0.033"	10	100
Locking Angle Molding 	**7858**	144"	15/16"	0.018"	20	240
	LAM12	144"	1-1/4"	0.018"	20	240
	LAM12HRC	144"	1-1/4"	0.018"	20	240
	LAM151220E	144"	1-1/2"	0.028"	10	120
Locking Angle Molding for Soffits 	new **LAM151220ES**	144"	1-1/2"	0.028"	10	120
SimpleCurve KAM 	**SC151220EQ** (37" Radius)	148"	1-1/2"	0.028"	10	124
	SC151225 (32" Radius)	148"	1-1/2"	0.018"	10	124
	SC21220EQ (55" Radius)	148"	2"	0.028"	10	124
	SC21225 (40" Radius)	148"	2"	0.018"	10	124

NOTE: .018" metal thickness meets ASTM C645 for framing

DETAILS

Knurled Angle Molding

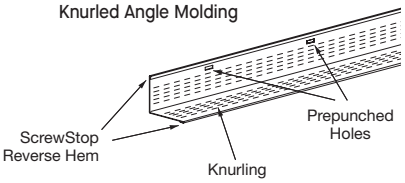

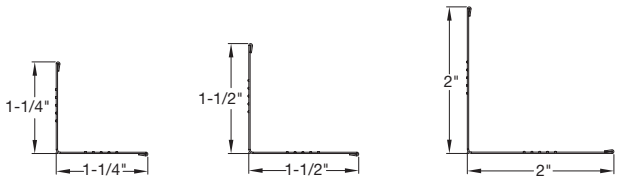

Locking Angle Molding



Locking Angle Molding for Soffits



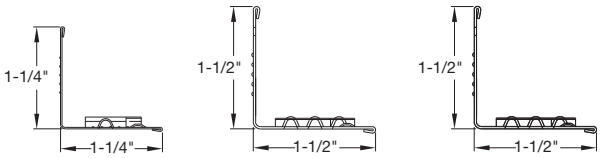

SimpleCurve® KAM

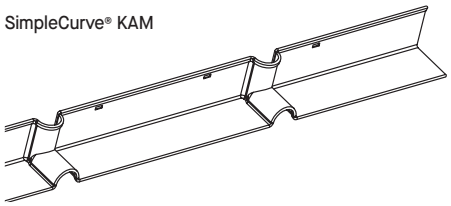

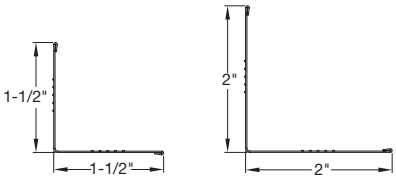

LEED® is a registered trademark of the U.S. Green Building Council; Declare® and Living Building Challenge® (LBC) are registered trademarks of the International Living Future Institute®; WELL™ is a trademark of the International WELL Building Institute UL and UL Certified are trademarks of UL LLC; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2025 AWI Licensing LLC

Armstrong® World Industries