
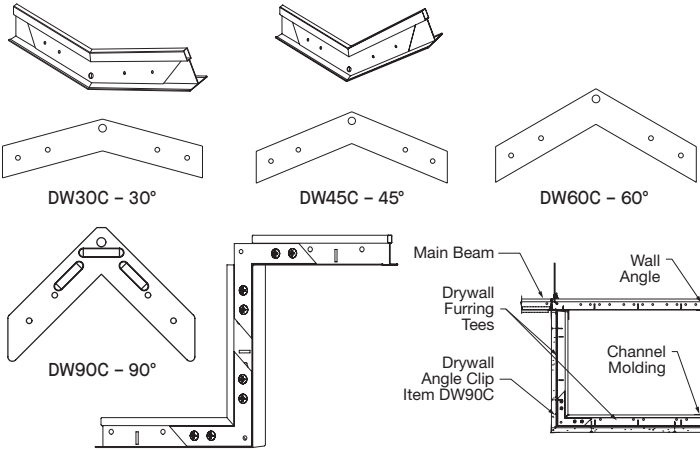


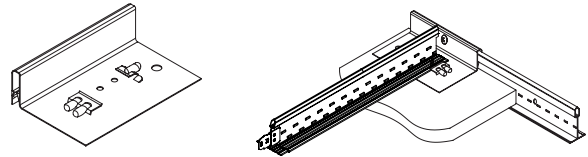
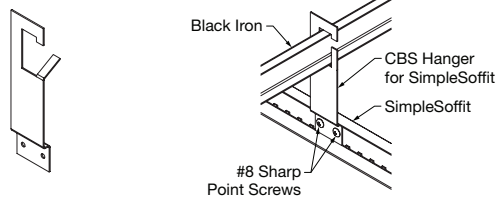


FRAMEALL® DRYWALL GRID SOLUTIONS

Accessories





















VISUAL SELECTION

Item No.	Description	
DWACS 100 pcs/bucket	DWACS – Drywall Attachment Clip – Facilitates transition from drywall to acoustical ceiling; locks under bulb of grid section to prevent upward movement and provide secure attachment surface on one side of exposed grid.	
FZDWACS 50 pcs/bucket		
DW30C – 30° DW45C – 45° DW60C – 60° DW90C – 90° 250 pcs/bucket	Drywall Angle Clip – Used to create positive and secure angles for drywall and ceiling installations on either main beams or cross tees; attachment to be made with 7/16" pan head screw.	
FZDW30C – 30° FZDW45C – 45° FZDW60C – 60° FZDW90C – 90° 50 pcs/bucket		
RC2AG 205 pcs/bucket	RC2 – Radius Clip is used for drywall applications which form curved installations; attaches to the cavity side of web of the main beam with four 7/16" pan head screws. Install at all knockout locations.	
FZRC2AG 50 pcs/bucket		
RC1 200 pcs/bucket	RC1 – Splice Clip is used as a main beam splice or partition top trim splice.	
FZRC1 50 pcs/bucket		
GSC9 (2-1/2" to 8-1/2") GSC12 (5-1/2" to 11-1/2") GSC16 (9-1/2" to 15-1/2") 100 pcs/bucket	Adjustable Grid Spacer Clip – Used to space two parallel main beams for light fixtures, air diffusers, etc.; allows for 1/4" adjustments with three different clips.	
FZGSC9 (1" to 4") FZGSC12 (4" to 8") FZGSC16 (8" to 14") 50 pcs/bucket		
Locking DW58LTAG – 5/8" Gypsum DW50LT – 1/2" Gypsum 125 pcs/bucket	Drywall Transition Clip with Locking Tabs – Facilitates transition from drywall to acoustical ceiling; one-sided hold-down clip; eliminates need for drywall bead. Locking tabs provide secure location for DGS cross tees.	
FZDW58LTAG – 5/8" Gypsum FZDW50LT – 1/2" Gypsum 50 pcs/bucket		
CBS4SS – 4" CBS6SS – 6" CBS8SS – 8" CBS10SS – 12" CBS12SS – 14" 50 pcs/carton	CBS Hanger grid – Channel Beam Support Hanger for SimpleSoffit® is used for easier C Channel installations (New York City market only)	

FRAMEALL® DRYWALL GRID SOLUTIONS

Accessories

VISUAL SELECTION

Item No.	Description		
CBS4A – 4" (200 pcs/ctn) CBS6A – 6" (200 pcs/ctn) CBS8A – 8" (200 pcs/ctn) CBS10A – 10" (150 pcs/ctn) CBS12A – 12" (150 pcs/ctn)	4", 6", 8", 10", and 12" Channel Beam Splice – Used to suspend main beams to 1-1/2" black iron carrying channels		
CBS2004A – 4" (75 pcs/ctn) CBS2006A – 6" (75 pcs/ctn) CBS2008A – 8" (75 pcs/ctn)	CBS2004A (4"), CBS2006A (6"), and CBS2008A (8") used for 2" black iron carrying channels		
EHDC50 (for 1/2" ceiling panels and drywall) EHDC58 (for 5/8" ceiling panels and drywall) EHDC75 (for 3/4" ceiling panels and drywall) 125 pcs/bucket	External Hold-Down Clip locks under bulb of grid section to prevent upward movement and provide secure attachment surface. Keeps acoustical and drywall ceiling components in place during wind uplift and in high security areas.		
FZEHDC50 (for 1/2" ceiling panels and drywall) FZEHDC58 (for 5/8" ceiling panels and drywall) FZEHDC75 (for 3/4" ceiling panels and drywall) 50 pcs/bucket			
DLCCAG 250 pcs/bucket	DLCC – Direct Load Ceiling Clip is used to hang suspension system below existing 15/16" grid face, transferring weight directly to hanger wire; may be used to preserve the fire rating of an existing ceiling, and to support heavy accessories.		
FZDLCCAG 50 pcs/bucket			
DDC 250 pcs/bucket	DDC – Double Drywall Clip is used to hang suspension system below existing 1-1/2" grid face, transferring weight directly to hanger wire; may be used to preserve the fire rating of an existing ceiling, and to support heavy accessories; allows for double layer of 5/8" gypsum board.		
FZDDC 50 pcs/bucket			
DWC 250 pcs/bucket	DWC – Drywall Clip allows for a "second" ceiling to be installed below a drywall ceiling; attaches through installed drywall to supporting structure.		
MBACAG 70 pcs/bucket	MBAC – Main Beam Adapter Clip attaches to web of suspension system section; provides larger surface for screw attachments; used as a hold-down clip for thin material (metal or plastic lay-in panels); fastens drywall track to underside of exposed suspension system with lay-in panels, leaving suspension system face free of screw holes.		
FZMBAC 50 pcs/bucket			
XTAC 100 pcs/bucket	XTAC – Cross Tee Adapter Clip is used to attach field-cut cross tees to main beams.		
FZXTAC 50 pcs/bucket			
QSUTC 150 pcs/bucket	QSUTC – QuikStix™ Uptight Clip saves time in tight plenum areas and is adjustable to uneven surfaces. G90 hot-dipped galvanized steel.		
FZQSUTC 50 pcs/bucket			
IIC IIC2 36 pcs/bucket	IIC – Impact Isolation Clip for use with HD8906IIC drywall grid main beam. Provides up to 8 points of IIC improvement to ensure your project meets IBC requirements. IIC and IIC2 Clips must be used with HD8906IIC Drywall Grid Main Beam		
WS12 1000 pcs/bucket	Hanger Wire Splice – Splices two pieces of 12-gauge wire for extra long wire drops or renovation work		
FZWS12 50 pcs/bucket			