


DUNE™

Square Lay-in & Tegular
fine texture

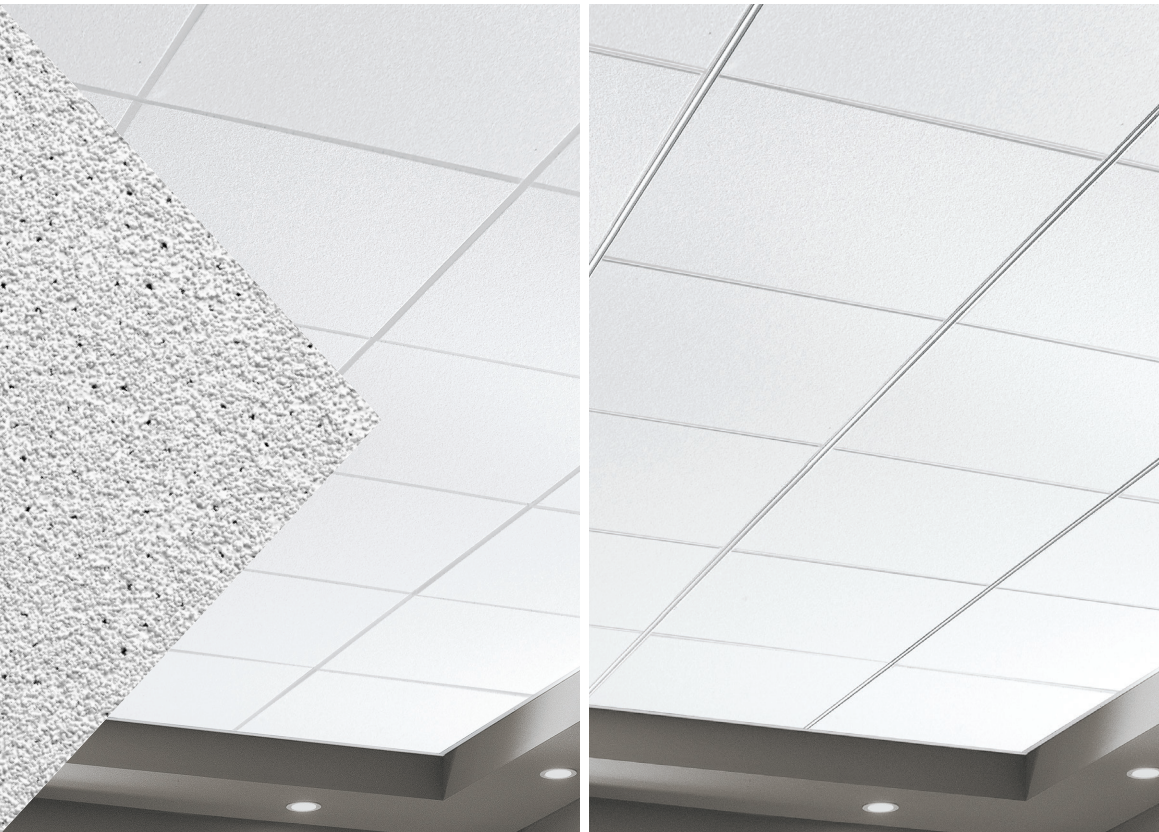

CAD/Revit® drawings at:
armstrongceilings.com/cadrevit

Dune Square Lay-in panels with Prelude XL
15/16" suspension system

Dune Tegular panels with Interlude XL HRC
9/16" suspension system

Fine-textured panels are non-directional and durable with standard acoustical performance.

KEY SELECTION ATTRIBUTES


- Dune™ panels are part of the Sustain® portfolio, and meet the most stringent industry sustainability compliance standards today
- Upgrade look at a modest price
- Ceiling-2-Ceiling™ Post-consumer Recycled Content options: Items 1773HRC, 1774HRC, 1775HRC, 1776HRC, 1777HRC (check armstrongceilings.com/ecomedes)
- Mold- and mildew-resistant surface
- USDA-Certified Biobased Product – 99%
- Durable – Scratch-resistant
- Non-directional visual reduces scrap and installation time
- Product can be recycled through the Armstrong Ceilings Recycling Program
- 30-Year Limited System Warranty against visible sag (excludes items 1796 and 1798), mold and mildew
- 10-Year replacement panel available for items 1772, 1773, 1774, 1776
- Made in the U.S.A. of domestic and global content
- Build America, Buy America (BABA) Act compliant



COLOR



DETAILS (Other Suspension Systems compatible. Refer to listing on next page.)

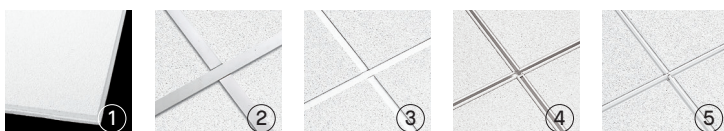

1. Dune™ Tegular
2. Dune™ Square Lay-in with Prelude® 15/16" suspension system
3. Dune™ Tegular with Suprafine® 9/16" suspension system
4. Dune™ Tegular with Silhouette® XL® 9/16" suspension system with 1/4" reveal
5. Dune™ Tegular with Interlude® XL® HRC 9/16" suspension system

DUNE™

Square Lay-in & Tegular fine texture



LEED®
WELL™ LBC

UP TO **56%** RECYCLED CONTENT

Calculate sustainability with Ecomedes
armstrongceilings.com/ecomedes



LOCATION DEPENDENT

VISUAL SELECTION

armstrongceilings.com/suspdwgs	Susp. Dwg.	Item No.	Dimensions (Inches)
DUNE™ 15/16" Square Lay-in	1	1772	24 × 24 × 5/8"
		1850	24 × 24 × 5/8"
		1773 1773HRC	24 × 48 × 5/8"
		1851	24 × 48 × 5/8"
		1796	20 × 60 × 3/4"
		1798	30 × 30 × 3/4"
		4272	30 × 60 × 3/4"

Made-to-Order
Sizes

4-6
WEEKS
order to ship

3/4" or 5/8" Thick – 15/16" Square Lay-in

Width	Length
12" - 30"	18" - 72"

PERFORMANCE SELECTION

Dots represent high level of performance.

\$\$\$

UL Classified Acoustics	Total Acoustics ¹	Fire Performance	Light Reflect	Anti-Mold/Mildew	Sag Resistant	Certified Low VOC Emissions	DURABILITY	Recycled Content	Recycle Program	30-Yr Warranty
NRC + CAC =							Scratch			
0.50 30	N/A	Class A	0.81	*	*	*	*	Std	*	*
0.50 35	N/A	Fire Guard™	0.81	*	*	*	*	Std	*	*
0.50 30	N/A	Class A	0.81	*	*	*	*	Std	*	*
0.50 35	N/A	Fire Guard	0.81	*	*	*	*	Std	*	*
0.50 35	N/A	Class A	0.81	*	Std	*	*	*	*	1-Yr
0.50 35	N/A	Class A	0.81	*	Std	*	*	*	*	1-Yr
0.50 35	N/A	Class A	0.81	*	Std	*	*	*	*	1-Yr


MORE ITEMS ►

Red Numbers are Fire Guard items.

¹ Total Acoustics® ceiling panels have an ideal combination of sound absorption and sound blocking in one product.

SUSPENSION SYSTEMS

15/16"



PHYSICAL DATA

Material

Wet-formed mineral fiber

Surface Finish

Factory-applied latex paint

Fire Performance

Class A: ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index of 25 or less. Smoke Developed Index of 50 or less (UL® labeled).

Fire Guard™: A fire-resistive ceiling when used in applicable UL assemblies.

ASTM E1264 Classification

Type A, Form A1.2, Pattern E; Fire Class A

Humidity/Sag Resistance

HumiGuard® Plus ceiling panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications. Excludes large made-to-order panels.

Anti-Mold/Mildew

Ceiling tiles with BioBlock® performance resist the growth of mold and mildew on the tile surface.

Acoustical Performance

CAC testing conducted using Prelude® suspension system.

VOC Emissions

Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard®, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

High Recycled Content

Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines. HRC items contain 15% or greater post-consumer recycled ceilings.

Insulation Value

R Factor – 1.6 (BTU units)
R Factor – 0.28 (Watts units)

30-Year Performance Guarantee & Warranty

When installed with Armstrong® Suspension System. Details at armstrongceilings.com/warranty (Excludes items 1796, 1798, and large other size panels)

Weight; Square Feet/ Carton

1772 – 0.94 LBS/SF; 64 SF/CTN

1773 – 0.88 LBS/SF; 64 SF/CTN

1796 – 1.33 LBS/SF; 67 SF/CTN

1798 – 1.14 LBS/SF; 50 SF/CTN

1850 – 1.19 LBS/SF; 48 SF/CTN

1851 – 1.22 LBS/SF; 64 SF/CTN

4272 – 1.14 LBS/SF; 75 SF/CTN

Minimum Order Quantity

1 carton, excludes made-to-order panels

Metric Items Available

1772M, 1850M, 1773M, 1851M, 1796M, 1798M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.

TechLine 877 276-7876

armstrongceilings.com/dune

Armstrong®
World Industries

MINERAL FIBER – Standard

DUNE™

Square Lay-in & Tegular

fine texture



Calculate sustainability with Ecomedes
armstrongceilings.com/ecomedes































LOCATION DEPENDENT

VISUAL SELECTION

PERFORMANCE SELECTION

Dots represent high level of performance.


\$\$\$

armstrongceilings. com/suspdwgs	Susp. Dwg.	Item No.	Dimensions (Inches)	 UL Classified Acoustics	 =	 Total Acoustics ¹	 Fire Performance	 Light Reflect	 Bio-Block Anti-Mold/ Mildew	 Humi- Guard+	 Sag Resistant	 Certified Low VOC Emissions	 DURABILITY	 Recycled Content	 Recycle Program	 30-Yr Warranty	
DUNE™	12	 1774	24 × 24 × 5/8"														
15/16" Angled Tegular		 1774HRC	24 × 24 × 5/8"														
		1853	24 × 24 × 5/8"														
		 1776	24 × 48 × 5/8"														
		 1776HRC	24 × 48 × 5/8"														
9/16" Beveled Tegular	29	 1775	24 × 24 × 5/8"														
	44	 1775HRC	24 × 24 × 5/8"														
	48																
	52																
	56	1852	24 × 24 × 5/8"														
		 1777	24 × 48 × 5/8"														
		 1777HRC	24 × 48 × 5/8"														
Made-to-Order Sizes			3/4" or 5/8" Thick – 15/16" & 9/16" Angled Tegular														
			Width	Length													
			12" - 30"	18" - 72"													

Red Numbers are Fire Guard items.

¹ Total Acoustics® ceiling panels have an ideal combination of sound absorption and sound blocking in one product.

SUSPENSION SYSTEMS



PHYSICAL DATA

Material
Wet-formed mineral fiber

Surface Finish
Factory-applied latex paint

Fire Performance
Class A: ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index of 25 or less. Smoke Developed Index of 50 or less (UL® labeled).

Fire Guard™: A fire-resistive ceiling when used in applicable UL assemblies (Class A)

ASTM E1264 Classification
Type A, Form A1.2, Pattern E; Fire Class A

Humidity/Sag Resistance
HumiGuard® Plus ceiling panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications. Excludes large made-to-order panels.

Anti-Mold/Mildew
Ceiling tiles with BioBlock® performance resist the growth of mold and mildew on the tile surface.

Acoustical Performance
CAC testing conducted using Prelude suspension system.

VOC Emissions
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard™, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

High Recycled Content
Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines. HRC items contain 15% or greater post-consumer recycled ceilings.

Insulation Value
R Factor – 1.6 (BTU units)
R Factor – 0.28 (Watts units)

30-Year Performance Guarantee & Warranty
When installed with Armstrong® Suspension System. Details at armstrongceilings.com/warranty

Weight; Square Feet/ Carton
1774, 1774HRC, 1775, 1775HRC – 0.75 LBS/SF; 64 SF/CTN
1776, 1776HRC, 1777, 1777HRC – 0.75 LBS/SF; 64 SF/CTN
1852, 1853 – 1.20 LBS/SF; 48 SF/CTN

Minimum Order Quantity
1 carton, excludes made-to-order panels

Metric Items Available
1775M, 1777M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.