



# ACOUSTICAL ON-CENTER LINEAR LIGHTING

LAYOUT GUIDE

**Armstrong®**  
World Industries

## SYMMETRY IS BEAUTIFUL

Until now, incorporating on-center linear lighting into your ceiling layouts has been a challenge.

Now, Armstrong® can help you deliver your vision of a perfectly symmetrical, perfectly finished ceiling featuring on-center continuous or non-continuous linear lighting using factory-finished ceiling panels and suspension systems.

On-center continuous  
and non-continuous  
linear lighting layouts  
are easy to customize

[armstrongceilings.com/linearlighing](http://armstrongceilings.com/linearlighing)

- ESR-2311: ICC-ES Evaluation Report
- ESR-1289: ICC-ES Evaluation Report
- ES-0163: IAPMO seismic compliant with 2012 IBC
- Department of State Architect – DSA PA105
- City of LA – RR 5348
- 26 UL Fire Resistant Designs
- Meets ASTM C635, C841, C926, C636, C754, C840, and C842
- Meets ASTM C645 requirement for minimum metal thickness to .0179" for screw pullout


For more information, call 877 276-7876



## ACOUSTICAL ON-CENTER LINEAR LIGHTING




## ON CENTER LINEAR LIGHTING LAYOUT GUIDE

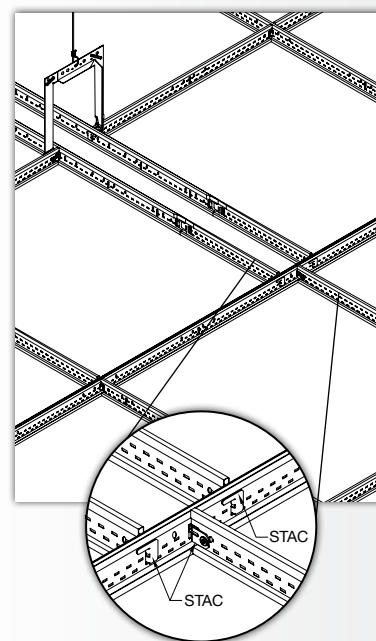


### On-center Linear

Using a combination of Made-to-Order ceiling panels and suspension systems, perfect lighting layouts like this are easy to specify and install.

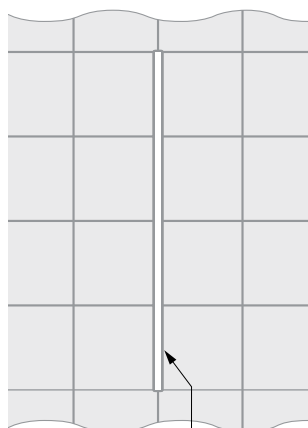

Opening for on-center  
linear light fixture  
placement

CONTINUOUS

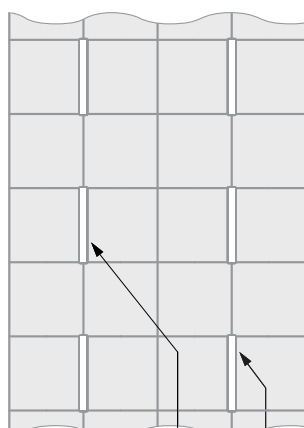

Opening for on-center  
linear light fixture  
placement


NON-CONTINUOUS

For more information, call 877 276-7876

# ON-CENTER LINEAR LIGHTING

## DESIGN YOUR LAYOUT

Select from one of our standard layouts or create your own configuration

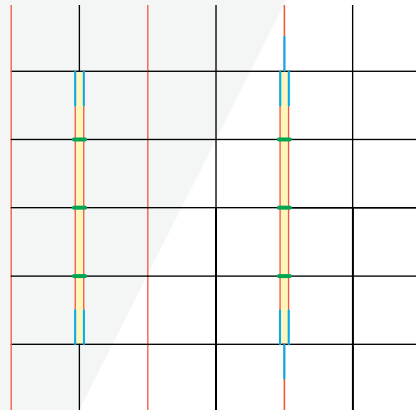

### KEY:

- Main Beams
- Cross Tees
- Grid Adapter
- Lighting Connector Bracket or TechZone® Ceiling Systems Yoke
- Lights (suggested location)

## CHOOSE YOUR FIELD PANELS, SUSPENSION SYSTEM, AND ACCESSORIES

### MADE-TO-ORDER – CEILING PANELS AND SUSPENSION SYSTEMS

Made-to-Order ceiling panels are available to ship in 3 weeks with a one carton minimum and are perfect for designs where building modules are not standard, or if you'll be using narrow linear fixtures or diffusers. Now you can have crisp, clean panels and suspension system throughout your project.


- Popular textures, including Lyra®, Optima®, Calla®, and Ultima® (details below)
- Size capabilities by product:
  1. Lyra
    - 4"-11-1/2" wide and 6"-72" long
    - 12"-48" wide and 4"-96" long
  2. Calla
    - 4"-24-1/2" wide and 4"-72" long
    - 25"-35-1/2" wide and 4"-30" long
    - 36"-48" wide and 4"-24" long

3. Optima
  - 4"-11-1/2" wide and 6"-96" long
  - 12"-48" wide and 4"-120" long
4. Ultima
  - 4"-24-1/2" wide and 4"-72" long
  - 25"-48" wide and 4"-30" long
5. Suspension Systems
  - 36"-144" for main beams
  - 6"-144" for cross tees

\*See data pages for more details

### LYRA®, CALLA®

- Smooth drywall-like ceiling visual
- Outstanding acoustical performance
  - 0.95 NRC Lyra, 0.85 NRC Calla
- Part of the Sustain® portfolio

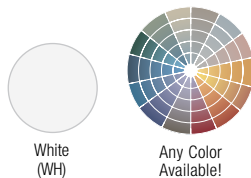

### OPTIMA®, ULTIMA®

- Non-directional DuraBrite® surface for:
  - Excellent durability
  - Superior light reflectance to enhance daylighting and save energy
- Outstanding acoustical performance:
  - 0.90+ NRC Optima, 0.75 NRC Ultima

- Part of the Sustain® portfolio



### ALL LYRA, OPTIMA, CALLA, AND ULTIMA PANELS ARE:



Class A  
Fire Rated



Anti-microbial



Washable



Scrubbable



Impact-resistant







Soil-resistant

| Item No.               | Description | Dimensions<br>(Inches) | Edge<br>Profile                                                                     | UL Classified Acoustics |     |                                                                                                      | Total Acoustics <sup>1</sup> | AC   | Light Reflect   | Sag Resistance | Recycling Program | Recycled Content |
|------------------------|-------------|------------------------|-------------------------------------------------------------------------------------|-------------------------|-----|------------------------------------------------------------------------------------------------------|------------------------------|------|-----------------|----------------|-------------------|------------------|
|                        |             |                        |                                                                                     | NRC                     | +   | CAC                                                                                                  |                              |      |                 |                |                   |                  |
| Square Tegular Panels  |             |                        |                                                                                     |                         |     |                                                                                                      |                              |      |                 |                |                   |                  |
| □ 8361PB               | Lyra®       | 24 × 24 × 1"           |  | 0.95                    | N/A | —                                                                                                    | 190                          | 0.88 | HumiGuard® Plus | Yes            | Up to 71%         |                  |
| □ 3251                 | Optima®     | 24 × 24 × 1"           |  | 0.95                    | N/A | —                                                                                                    | 190                          | 0.90 | HumiGuard Plus  | Yes            | Up to 71%         |                  |
| □ 2824                 | Calla®      | 24 × 24 × 1"           |  | 0.85                    | 35  | <b>BEST</b><br>   | 170                          | 0.86 | HumiGuard Plus  | Yes            | 77%               |                  |
| Beveled Tegular Panels |             |                        |                                                                                     |                         |     |                                                                                                      |                              |      |                 |                |                   |                  |
| □ 1912                 | Ultima®     | 24 × 24 × 3/4"         |  | 0.75                    | 35  | <b>BETTER</b><br> | N/A                          | 0.90 | HumiGuard Plus  | Yes            | Up to 84%         |                  |

¹ Total Acoustics® ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product. **GOOD** (NRC 0.60-0.65; CAC 35+) **BETTER** (NRC 0.70-0.75; CAC 35+) **BEST** (NRC 0.80+; CAC 35+)

## CHOOSE YOUR SUSPENSION SYSTEM

BELOW IS A SELECTION OF 9/16" MAIN BEAMS, CROSS TEES, AND MAIN BEAM TO CROSS TEE ADAPTERS CREATED TO SIMPLIFY COMMON ON-CENTER LIGHTING LAYOUTS



| Item No.                                                             | Description                                  | Roof Spacing | Notching |
|----------------------------------------------------------------------|----------------------------------------------|--------------|----------|
| <b>Silhouette XL 1/8" Reveal 9/16" Slotted Tee Suspension System</b> |                                              |              |          |
| <input type="checkbox"/> <b>761238</b> _ _                           | 12' HD Main Beam – Notched 24" O.C. one side | 12" O.C.     |          |
| <input type="checkbox"/> <b>761228</b> _ _                           | 10' HD Main Beam – Notched 24" O.C. one side | 12" O.C.     |          |
| <input type="checkbox"/> <b>761218</b> _ _                           | 8' HD Main Beam – Notched 24" O.C. one side  | 12" O.C.     |          |
| <input type="checkbox"/> <b>761208</b> _ _                           | 6' HD Main Beam – Notched 24" O.C. one side  | 12" O.C.     |          |
| <input type="checkbox"/> <b>760238</b> _ _                           | 12' ID Main Beam – Notched 24" O.C. one side | 12" O.C.     |          |
| <input type="checkbox"/> <b>760228</b> _ _                           | 10' ID Main Beam – Notched 24" O.C. one side | 12" O.C.     |          |
| <input type="checkbox"/> <b>760218</b> _ _                           | 8' ID Main Beam – Notched 24" O.C. one side  | 12" O.C.     |          |
| <input type="checkbox"/> <b>760208</b> _ _                           | 6' ID Main Beam – Notched 24" O.C. one side  | 12" O.C.     |          |

**Cross Tees**

|                                             |                                                                                                          |   |  |
|---------------------------------------------|----------------------------------------------------------------------------------------------------------|---|--|
| <input type="checkbox"/> <b>XL76898</b> _ _ | 8' Cross Tee – Notched both sides at 24", 72", notched one side at 46", 50", and on opposite side at 48" | – |  |
| <input type="checkbox"/> <b>XL76498</b> _ _ | 4' Cross Tee – Notched one side only at 22", 26" and on opposite side at 24"                             | – |  |
| <input type="checkbox"/> <b>XL76478</b> _ _ | 46" Cross Tee – Notched both sides at 22"                                                                | – |  |
| <input type="checkbox"/> <b>XL76448</b> _ _ | 44" Cross Tee – Center notched, both sides                                                               | – |  |
| <input type="checkbox"/> <b>XL76288</b> _ _ | 28" Cross Tee – Unnotched                                                                                | – |  |
| <input type="checkbox"/> <b>XL76228</b> _ _ | 22" Cross Tee – Unnotched                                                                                | – |  |

**Grid Adapter**

|                                             |                 |   |  |
|---------------------------------------------|-----------------|---|--|
| <input type="checkbox"/> <b>GA76998</b> _ _ | 1' Grid Adapter | – |  |
|---------------------------------------------|-----------------|---|--|

**Silhouette XL 1/4" Reveal 9/16" Slotted Tee Suspension System**

|                                           |                                              |          |  |
|-------------------------------------------|----------------------------------------------|----------|--|
| <input type="checkbox"/> <b>76123</b> _ _ | 12' HD Main Beam – Notched 24" O.C. one side | 12" O.C. |  |
| <input type="checkbox"/> <b>76122</b> _ _ | 10' HD Main Beam – Notched 24" O.C. one side | 12" O.C. |  |
| <input type="checkbox"/> <b>76121</b> _ _ | 8' HD Main Beam – Notched 24" O.C. one side  | 12" O.C. |  |
| <input type="checkbox"/> <b>76120</b> _ _ | 6' HD Main Beam – Notched 24" O.C. one side  | 12" O.C. |  |
| <input type="checkbox"/> <b>76023</b> _ _ | 12' ID Main Beam – Notched 24" O.C. one side | 12" O.C. |  |
| <input type="checkbox"/> <b>76022</b> _ _ | 10' ID Main Beam – Notched 24" O.C. one side | 12" O.C. |  |
| <input type="checkbox"/> <b>76021</b> _ _ | 8' ID Main Beam – Notched 24" O.C. one side  | 12" O.C. |  |
| <input type="checkbox"/> <b>76124</b> _ _ | 6' ID Main Beam – Notched 24" O.C. one side  | 12" O.C. |  |

**Cross Tees**

|                                            |                                                                                                          |   |  |
|--------------------------------------------|----------------------------------------------------------------------------------------------------------|---|--|
| <input type="checkbox"/> <b>XL7689</b> _ _ | 8' Cross Tee – Notched both sides at 24", 72", notched one side at 46", 50", and on opposite side at 48" | – |  |
| <input type="checkbox"/> <b>XL7649</b> _ _ | 4' Cross Tee – Notched one side only at 22", 26" and on opposite side at 24"                             | – |  |
| <input type="checkbox"/> <b>XL7647</b> _ _ | 46" Cross Tee – Notched both sides at 22"                                                                | – |  |
| <input type="checkbox"/> <b>XL7644</b> _ _ | 44" Cross Tee – Center notched, both sides                                                               | – |  |
| <input type="checkbox"/> <b>XL7628</b> _ _ | 28" Cross Tee – Unnotched                                                                                | – |  |
| <input type="checkbox"/> <b>XL7622</b> _ _ | 22" Cross Tee – Unnotched                                                                                | – |  |

**Grid Adapter**

|                                            |                 |   |  |
|--------------------------------------------|-----------------|---|--|
| <input type="checkbox"/> <b>GA7699</b> _ _ | 1' Grid Adapter | – |  |
|--------------------------------------------|-----------------|---|--|

| Item No.                                        | Description      | Roof Spacing |
|-------------------------------------------------|------------------|--------------|
| <b>Interlude XL HRC 9/16" Suspension System</b> |                  |              |
| <input type="checkbox"/> <b>6126HRC</b> _ _     | 10' HD Main Beam | 6" O.C.      |
| <input type="checkbox"/> <b>6125HRC</b> _ _     | 8' HD Main Beam  | 6" O.C.      |
| <input type="checkbox"/> <b>6124HRC</b> _ _     | 6' HD Main Beam  | 6" O.C.      |
| <input type="checkbox"/> <b>61026HRC</b> _ _    | 10' ID Main Beam | 6" O.C.      |
| <input type="checkbox"/> <b>61025HRC</b> _ _    | 8' ID Main Beam  | 6" O.C.      |
| <input type="checkbox"/> <b>61024HRC</b> _ _    | 6' ID Main Beam  | 6" O.C.      |

**Cross Tees**

|                                               |               |                         |
|-----------------------------------------------|---------------|-------------------------|
| <input type="checkbox"/> <b>XL6189HRC</b> _ _ | 8' Cross Tee  | 24", 46", 48", 50", 72" |
| <input type="checkbox"/> <b>XL6149HRC</b> _ _ | 4' Cross Tee  | 22", 24", 26"           |
| <input type="checkbox"/> <b>XL6147HRC</b> _ _ | 46" Cross Tee | 22"                     |
| <input type="checkbox"/> <b>XL6144HRC</b> _ _ | 44" Cross Tee | 22"                     |
| <input type="checkbox"/> <b>XL6128HRC</b> _ _ | 28" Cross Tee | –                       |
| <input type="checkbox"/> <b>XL6122HRC</b> _ _ | 22" Cross Tee | –                       |

**Grid Adapter**

|                                               |                          |   |
|-----------------------------------------------|--------------------------|---|
| <input type="checkbox"/> <b>GA6199HRC</b> _ _ | 9" and 15" Grid Adapters | – |
|-----------------------------------------------|--------------------------|---|

**Suprafine XL 9/16" Suspension System**

|                                           |                  |         |
|-------------------------------------------|------------------|---------|
| <input type="checkbox"/> <b>7526</b> _ _  | 10' HD Main Beam | 6" O.C. |
| <input type="checkbox"/> <b>7525</b> _ _  | 8' HD Main Beam  | 6" O.C. |
| <input type="checkbox"/> <b>7524</b> _ _  | 6' HD Main Beam  | 6" O.C. |
| <input type="checkbox"/> <b>75026</b> _ _ | 10' ID Main Beam | 6" O.C. |
| <input type="checkbox"/> <b>75025</b> _ _ | 8' ID Main Beam  | 6" O.C. |
| <input type="checkbox"/> <b>75024</b> _ _ | 6' ID Main Beam  | 6" O.C. |

**Cross Tees**

|                                            |               |                         |
|--------------------------------------------|---------------|-------------------------|
| <input type="checkbox"/> <b>XL7589</b> _ _ | 8' Cross Tee  | 24", 46", 48", 50", 72" |
| <input type="checkbox"/> <b>XL7543</b> _ _ | 4' Cross Tee  | 22", 24", 26"           |
| <input type="checkbox"/> <b>XL7547</b> _ _ | 46" Cross Tee | 22"                     |
| <input type="checkbox"/> <b>XL7544</b> _ _ | 44" Cross Tee | 22"                     |
| <input type="checkbox"/> <b>XL7522</b> _ _ | 22" Cross Tee | –                       |

**Grid Adapter**

|                                            |                          |   |
|--------------------------------------------|--------------------------|---|
| <input type="checkbox"/> <b>GA7599</b> _ _ | 9" and 15" Grid Adapters | – |
|--------------------------------------------|--------------------------|---|

**Accessories**

|                                      |                                                                                       |   |
|--------------------------------------|---------------------------------------------------------------------------------------|---|
| <input type="checkbox"/> <b>LCB4</b> | 4" Lighting Connector Bracker                                                         | – |
| <input type="checkbox"/> <b>TZYK</b> | TechZone® Ceiling Systems Continuous Lighting Yoke (for 4" to 6" wide light fixtures) | – |
| <input type="checkbox"/> <b>STAC</b> | Single Tee Adapter Clip                                                               | – |


# ON-CENTER LINEAR LIGHTING

## CLIPS AND ACCESSORIES FOR LIGHTING

### LINEAR LIGHTING INTEGRATION – CLIPS AND ACCESSORIES




- The Zero Plenum Lighting Connector Bracket (LCB4) helps maintain the 4" wide suspension system opening, ensuring the BASO™ or Axis Click fixture fits properly and securely into the ceiling opening.
- The LCB4 installs like a small cross tee, stabbing through the rout holes in the two perpendicular main beams and aligning with the two parallel cross tees.

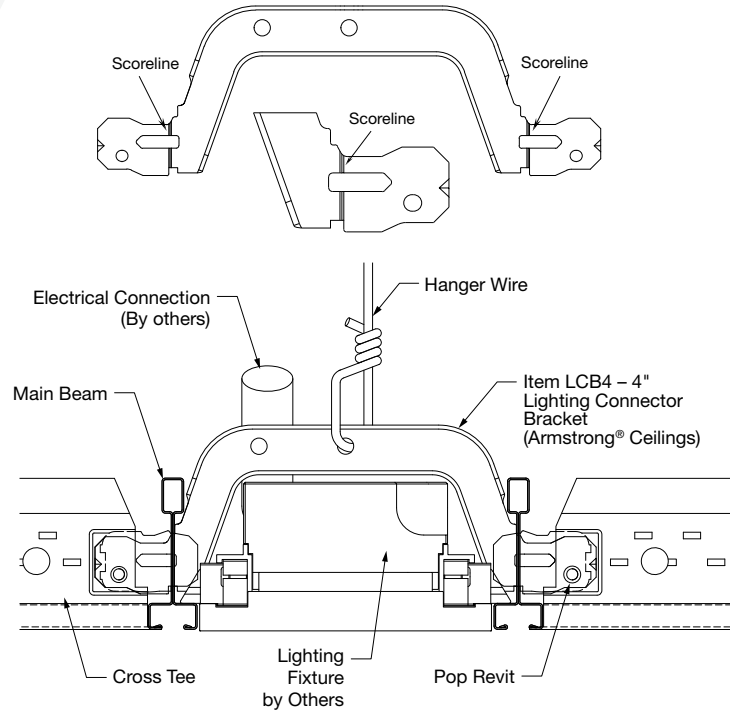

**BASO**  
**axis**

### TECHZONE® CEILING SYSTEMS YOKE (TZYK)


- Create a sleek ceiling design with uninterrupted ribbons of light
- Alternate continuous lights and diffusers with other services for a monolithic, uncluttered visual
- Easy installation
- Seismic tested
- Ability to use with 4" and 6" configurations

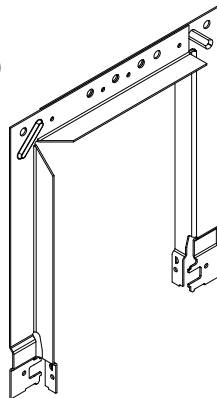

NOTE: 2 pieces per yoke assembly



### TECHZONE CEILING SYSTEMS BRACING CLIP (TZBC)

Use to connect cross tees to the main beam of the continuous technical zone when no yoke is present.

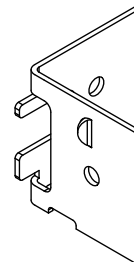

### STAC CLIP

Allows you to create strong, code compliant, non-seismic and seismic D, E, F main beam-to-cross tee connections.

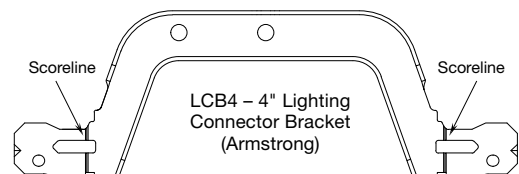




# ON-CENTER LINEAR LIGHTING

## CONTINUOUS LIGHT FIXTURE LAYOUT – 6' ON-CENTER

### 8' LINEAR LIGHTS WITH 9/16" SUSPENSION SYSTEM AND CEILING PANELS

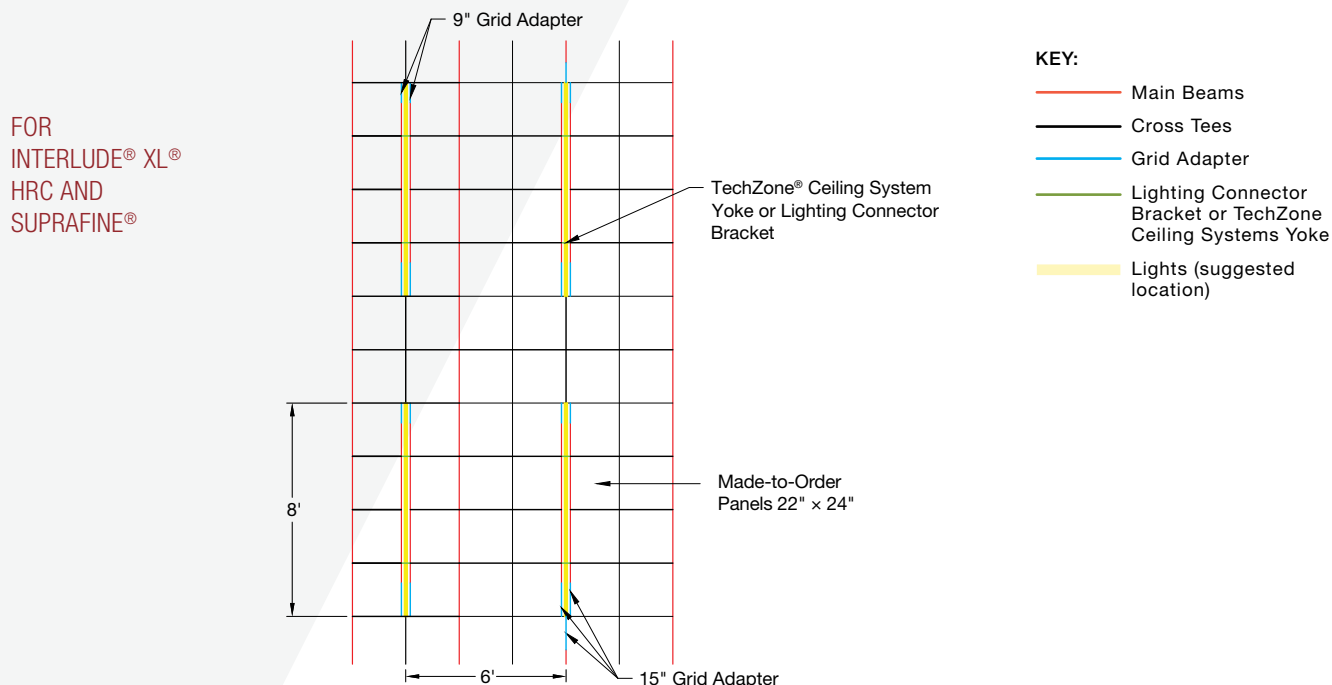

| Item No.                                          | Description                           | UL Classified Acoustics |   |     | Total Acoustics <sup>1</sup> | Light Reflect | Sag Resistance  | Recycling Program | Recycled Content |
|---------------------------------------------------|---------------------------------------|-------------------------|---|-----|------------------------------|---------------|-----------------|-------------------|------------------|
|                                                   |                                       | NRC                     | + | CAC |                              |               |                 |                   |                  |
| Ceiling Panels*                                   |                                       |                         |   |     |                              |               |                 |                   |                  |
| <input type="checkbox"/> 1912                     | Ultima® 24" × 24" Beveled Tegalur     | 0.75                    |   | 35  | BETTER                       | 0.90          | HumiGuard® Plus | Yes               | Up to 84%        |
| <input type="checkbox"/>                          | Made-to-Order Sizes or Colors (2 Wks) | N/A                     |   | N/A | —                            | 0.90          | HumiGuard Plus  | Yes               | Up to 84%        |
| NOTE: Up to 6 Weeks for Color & Size Combinations |                                       |                         |   |     |                              |               |                 |                   |                  |

\* For other ceiling panel options, refer to page 4.

<sup>1</sup> Total Acoustics® ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product. **GOOD** (NRC 0.60-0.65; CAC 35+) **BETTER** (NRC 0.70-0.75; CAC 35+) **BEST** (NRC 0.80+; CAC 35+)


| Description                                   | Interlude® XL® HRC                 | Suprafine®                      |
|-----------------------------------------------|------------------------------------|---------------------------------|
| <b>Main Beams</b>                             |                                    |                                 |
| 12' HD Main Beam Routs 6" O.C.                | <input type="checkbox"/> 6101HRC   | <input type="checkbox"/> 7501   |
| 6' HD Main Beam Routs 6" O.C.                 | <input type="checkbox"/> 6124HRC   | <input type="checkbox"/> 7524   |
| <b>Cross Tees</b>                             |                                    |                                 |
| 8' Cross Tee Routs at 24", 46", 48", 50", 72" | <input type="checkbox"/> XL6189HRC | <input type="checkbox"/> XL7589 |
| 4' Cross Tee Routs at 22", 24", 26"           | <input type="checkbox"/> XL6149HRC | <input type="checkbox"/> XL7543 |
| 46" Cross Tee Routs at 22"                    | <input type="checkbox"/> XL6147HRC | <input type="checkbox"/> XL7547 |
| 22" Cross Tee                                 | <input type="checkbox"/> XL6122HRC | <input type="checkbox"/> XL7522 |
| Grid Adapter (9" and 15")                     | <input type="checkbox"/> GA6199HRC | <input type="checkbox"/> GA7599 |

| Item No.                      | Description                                                                           |
|-------------------------------|---------------------------------------------------------------------------------------|
| <b>Accessories</b>            |                                                                                       |
| <input type="checkbox"/> LCB4 | 4" Lighting Connector Bracket                                                         |
| <input type="checkbox"/> TZYK | TechZone® Ceiling Systems Continuous Lighting Yoke (for 4" to 6" wide light fixtures) |
| <input type="checkbox"/> STAC | Single Tee Adapter Clip                                                               |

## CONTINUOUS LIGHT FIXTURE LAYOUT – 6' ON-CENTER

## 8' LINEAR LIGHTS WITH 9/16" SUSPENSION SYSTEM AND CEILING PANELS

FOR  
SILHOUETTE®  
1/4" AND 1/8"  
REVEAL

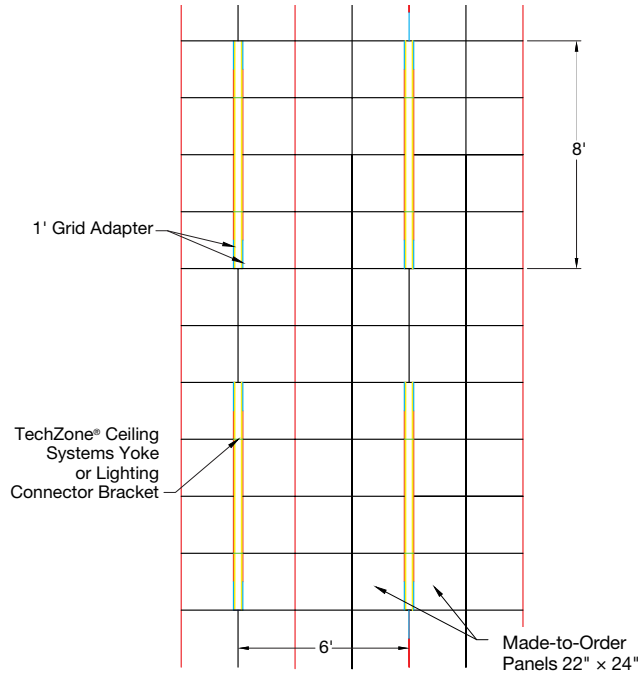

## KEY:

- Main Beams
- Cross Tees
- Grid Adapter
- Lighting Connector Bracket or TechZone Ceiling Systems Yoke
- Lights (suggested location)

| Item No.                                                                 | Description                     | UL Classified Acoustics |     | Total Acoustics¹ | Light Reflect | Sag Resistance  | Recycling Program | Recycled Content |
|--------------------------------------------------------------------------|---------------------------------|-------------------------|-----|------------------|---------------|-----------------|-------------------|------------------|
|                                                                          |                                 | NRC                     | CAC |                  |               |                 |                   |                  |
| Ceiling Panels*                                                          |                                 |                         |     |                  |               |                 |                   |                  |
| <input type="checkbox"/> 1912                                            | Ultima® 24" × 24" Beveled Tegal | 0.75                    | 35  | BETTER           | 0.90          | HumiGuard® Plus | Yes               | Up to 84%        |
| <input type="checkbox"/> 1 CTN MIN Made-to-Order Sizes or Colors (2 Wks) | Ultima 22" × 24"                | N/A                     | N/A | —                | 0.90          | HumiGuard Plus  | Yes               | Up to 84%        |
| NOTE: Up to 6 Weeks for Color & Size Combinations                        |                                 |                         |     |                  |               |                 |                   |                  |

\* For other ceiling panel options, refer to page 4.

<sup>1</sup> Total Acoustics® ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product. **GOOD** (NRC 0.60-0.65; CAC 35+) **BETTER** (NRC 0.70-0.75; CAC 35+) **BEST** (NRC 0.80+; CAC 35+)


| Description                                   | Silhouette® 1/4"                | Silhouette 1/8"                  | Silhouette Notes                                                                                    |
|-----------------------------------------------|---------------------------------|----------------------------------|-----------------------------------------------------------------------------------------------------|
| <b>Main Beams</b>                             |                                 |                                  |                                                                                                     |
| 12' HD Main Beam Routs 6" O.C.                | <input type="checkbox"/> 76123  | <input type="checkbox"/> 761238  | Routs 12" O.C., Single Notch 24" O.C.                                                               |
| 6' HD Main Beam Routs 6" O.C.                 | <input type="checkbox"/> 76120  | <input type="checkbox"/> 761208  | Routs 12" O.C., Single Notch 24" O.C.                                                               |
| <b>Cross Tees</b>                             |                                 |                                  |                                                                                                     |
| 8' Cross Tee Routs at 24", 46", 48", 50", 72" | <input type="checkbox"/> XL7689 | <input type="checkbox"/> XL76898 | Routs 12" O.C., Double Notch at 24", 72", notched one side at 46", 50", and on opposite side at 48" |
| 4' Cross Tee Routs at 22", 24", 26"           | <input type="checkbox"/> XL7649 | <input type="checkbox"/> XL76498 | Notched one side only at 22", 26", and on opposite side at 24"                                      |
| 46" Cross Tee Routs at 22"                    | <input type="checkbox"/> XL7647 | <input type="checkbox"/> XL76478 | Double Notch at 22"                                                                                 |
| 22" Cross Tee                                 | <input type="checkbox"/> XL7622 | <input type="checkbox"/> XL76228 | Unnotched                                                                                           |
| Grid Adapter (1')                             | <input type="checkbox"/> GA7699 | <input type="checkbox"/> GA76998 | Unnotched                                                                                           |

| Item No.                      | Description                                                                           |
|-------------------------------|---------------------------------------------------------------------------------------|
| <b>Accessories</b>            |                                                                                       |
| <input type="checkbox"/> LCB4 | 4" Lighting Connector Bracket                                                         |
| <input type="checkbox"/> TZYK | TechZone® Ceiling Systems Continuous Lighting Yoke (for 4" to 6" wide light fixtures) |
| <input type="checkbox"/> STAC | Single Tee Adapter Clip                                                               |

# ON-CENTER LINEAR LIGHTING

## CONTINUOUS LIGHT FIXTURE LAYOUT – 8' ON-CENTER

### 18' LINEAR LIGHTS WITH 9/16" SUSPENSION SYSTEM AND CEILING PANELS

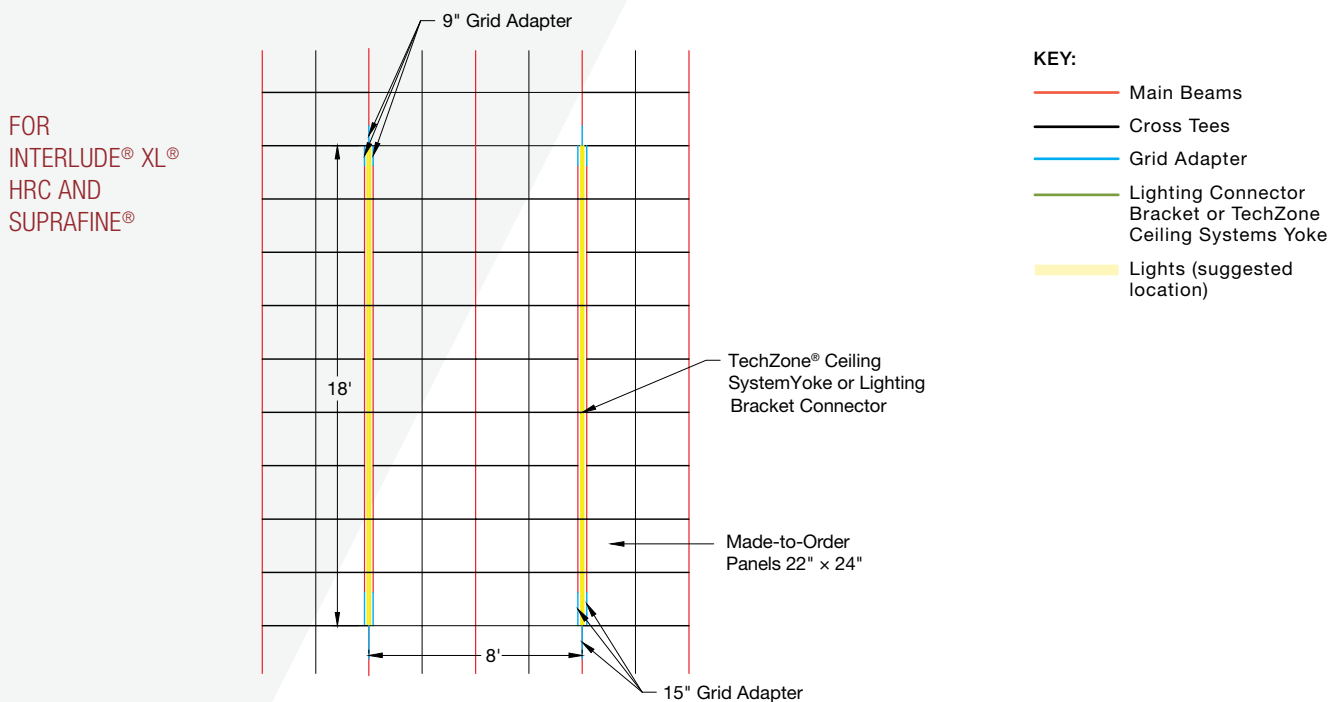

|                                                   |                                       | <div>UL Classified Acoustics</div> |              | Total Acoustics <sup>1</sup> | Light Reflect     | Sag Resistance         | Recycling Program        | Recycled Content          |                              |                             |
|---------------------------------------------------|---------------------------------------|------------------------------------|--------------|------------------------------|-------------------|------------------------|--------------------------|---------------------------|------------------------------|-----------------------------|
| Item No.                                          | Description                           | <div>NRC</div>                     | <div>+</div> | <div>CAC</div>               | <div>=</div>      | <div>NRC<br/>CAC</div> | <div>Light Reflect</div> | <div>Sag Resistance</div> | <div>Recycling Program</div> | <div>Recycled Content</div> |
| Ceiling Panels*                                   |                                       |                                    |              |                              |                   |                        |                          |                           |                              |                             |
| <input type="checkbox"/> 1912                     | Ultima® 24" × 24" Beveled Tegalur     | 0.75                               |              | 35                           | <div>BETTER</div> | 0.90                   | HumiGuard® Plus          | Yes                       |                              | Up to 84%                   |
| <input type="checkbox"/>                          | Made-to-Order Sizes or Colors (2 Wks) | N/A                                |              | N/A                          | –                 | 0.90                   | HumiGuard Plus           | Yes                       |                              | Up to 84%                   |
| NOTE: Up to 6 Weeks for Color & Size Combinations |                                       |                                    |              |                              |                   |                        |                          |                           |                              |                             |

\* For other ceiling panel options, refer to page 4.

<sup>1</sup> Total Acoustics® ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product. **GOOD** (NRC 0.60-0.65; CAC 35+) **BETTER** (NRC 0.70-0.75; CAC 35+) **BEST** (NRC 0.80+; CAC 35+)


| Description                                   | Interlude® XL® HRC                 | Suprafine®                      |
|-----------------------------------------------|------------------------------------|---------------------------------|
| <b>Main Beams</b>                             |                                    |                                 |
| 12' HD Main Beam Routs 6" O.C.                | <input type="checkbox"/> 6101HRC   | <input type="checkbox"/> 7501   |
| 8' HD Main Beam Routs 6" O.C.                 | <input type="checkbox"/> 6125HRC   | <input type="checkbox"/> 7525   |
| <b>Cross Tees</b>                             |                                    |                                 |
| 8' Cross Tee Routs at 24", 46", 48", 50", 72" | <input type="checkbox"/> XL6189HRC | <input type="checkbox"/> XL7589 |
| 46" Cross Tee Routs at 22"                    | <input type="checkbox"/> XL6147HRC | <input type="checkbox"/> XL7547 |
| 24" Cross Tee                                 | <input type="checkbox"/> XL6120HRC | <input type="checkbox"/> XL7520 |
| Grid Adapter (9" and 15")                     | <input type="checkbox"/> GA6199HRC | <input type="checkbox"/> GA7599 |

| Item No.                      | Description                                                                           |
|-------------------------------|---------------------------------------------------------------------------------------|
| <b>Accessories</b>            |                                                                                       |
| <input type="checkbox"/> LCB4 | 4" Lighting Connector Bracket                                                         |
| <input type="checkbox"/> TZYK | TechZone® Ceiling Systems Continuous Lighting Yoke (for 4" to 6" wide light fixtures) |
| <input type="checkbox"/> STAC | Single Tee Adapter Clip                                                               |

## CONTINUOUS LIGHT FIXTURE LAYOUT – 8' ON-CENTER

## 18' LINEAR LIGHTS WITH 9/16" SUSPENSION SYSTEM AND CEILING PANELS

FOR  
SILHOUETTE®  
1/4" AND 1/8"  
REVEAL

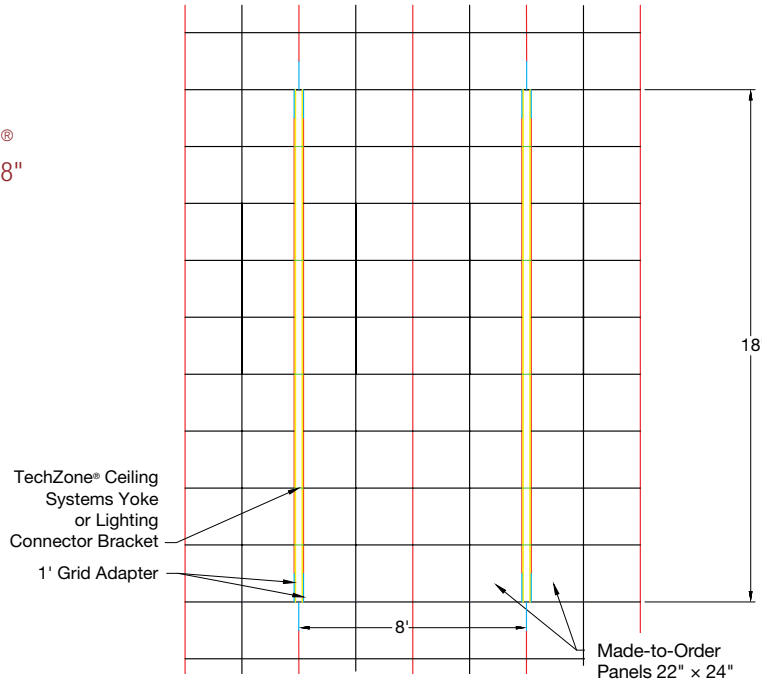

## KEY:

- Main Beams
- Cross Tees
- Grid Adapter
- Lighting Connector Bracket or TechZone Ceiling Systems Yoke
- Lights (suggested location)

| Item No.                      | Description                                       | UL Classified Acoustics |     | Total Acoustics¹ | Light Reflect | Sag Resistance  | Recycling Program | Recycled Content |
|-------------------------------|---------------------------------------------------|-------------------------|-----|------------------|---------------|-----------------|-------------------|------------------|
|                               |                                                   | NRC                     | CAC |                  |               |                 |                   |                  |
| Ceiling Panels*               |                                                   |                         |     |                  |               |                 |                   |                  |
| <input type="checkbox"/> 1912 | Ultima® 24" × 24" Beveled Tegalur                 | 0.75                    | 35  | BETTER           | 0.90          | HumiGuard® Plus | Yes               | Up to 84%        |
| <input type="checkbox"/>      | 1 CTN MIN Made-to-Order Sizes or Colors (2 Wks)   | N/A                     | N/A | —                | 0.90          | HumiGuard Plus  | Yes               | Up to 84%        |
|                               | NOTE: Up to 6 Weeks for Color & Size Combinations |                         |     |                  |               |                 |                   |                  |

\* For other ceiling panel options, refer to page 4.

<sup>1</sup> Total Acoustics® ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product. **GOOD** (NRC 0.60-0.65; CAC 35+) **BETTER** (NRC 0.70-0.75; CAC 35+) **BEST** (NRC 0.80+; CAC 35+)


| Description                                   | Silhouette® 1/4"                       | Silhouette 1/8"                         | Silhouette Notes                                                                                    |
|-----------------------------------------------|----------------------------------------|-----------------------------------------|-----------------------------------------------------------------------------------------------------|
| <b>Main Beams</b>                             |                                        |                                         |                                                                                                     |
| 12' HD Main Beam Routs 6" O.C.                | <input type="checkbox"/> <b>76123</b>  | <input type="checkbox"/> <b>761238</b>  | Routs 12" O.C., Single Notch 24" O.C.                                                               |
| 8' HD Main Beam Routs 6" O.C.                 | <input type="checkbox"/> <b>76121</b>  | <input type="checkbox"/> <b>761218</b>  | Routs 12" O.C., Single Notch 24" O.C.                                                               |
| <b>Cross Tees</b>                             |                                        |                                         |                                                                                                     |
| 8' Cross Tee Routs at 24", 46", 48", 50", 72" | <input type="checkbox"/> <b>XL7689</b> | <input type="checkbox"/> <b>XL76898</b> | Routs 12" O.C., Double Notch at 24", 72", notched one side at 46", 50", and on opposite side at 48" |
| 46" Cross Tee Routs at 22"                    | <input type="checkbox"/> <b>XL7647</b> | <input type="checkbox"/> <b>XL76478</b> | Double Notch at 22"                                                                                 |
| 24" Cross Tee                                 | <input type="checkbox"/> <b>XL7620</b> | <input type="checkbox"/> <b>XL76208</b> | Unnotched                                                                                           |
| Grid Adapter (1')                             | <input type="checkbox"/> <b>GA7699</b> | <input type="checkbox"/> <b>GA76998</b> | Unnotched                                                                                           |

| Item No.                             | Description                                                                           |
|--------------------------------------|---------------------------------------------------------------------------------------|
| <b>Accessories</b>                   |                                                                                       |
| <input type="checkbox"/> <b>LCB4</b> | 4" Lighting Connector Bracket                                                         |
| <input type="checkbox"/> <b>TZYK</b> | TechZone® Ceiling Systems Continuous Lighting Yoke (for 4" to 6" wide light fixtures) |
| <input type="checkbox"/> <b>STAC</b> | Single Tee Adapter Clip                                                               |

# ON-CENTER LINEAR LIGHTING

## CONTINUOUS LIGHT FIXTURE LAYOUT – 10' ON-CENTER

### 16' LINEAR LIGHTS WITH 9/16" SUSPENSION SYSTEM AND CEILING PANELS

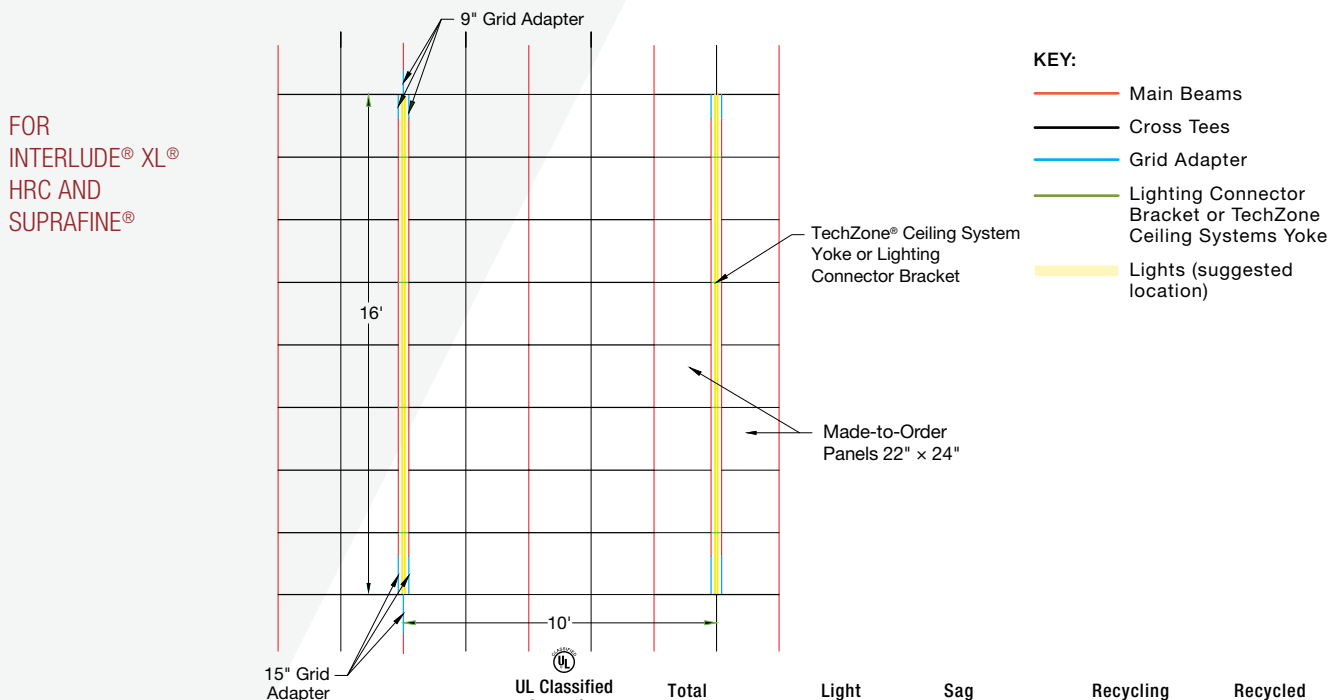

|                               |                                       | UL Classified Acoustics                           |   | Total Acoustics <sup>1</sup> | Light Reflect | Sag Resistance | Recycling Program | Recycled Content |           |
|-------------------------------|---------------------------------------|---------------------------------------------------|---|------------------------------|---------------|----------------|-------------------|------------------|-----------|
| Item No.                      | Description                           | NRC                                               | + | CAC                          | =             | NRC + CAC      |                   |                  |           |
| Ceiling Panels*               |                                       |                                                   |   |                              |               |                |                   |                  |           |
| <input type="checkbox"/> 1912 | Ultima® 24" × 24" Beveled Tegalur     | 0.75                                              |   | 35                           | BETTER        | 0.90           | HumiGuard® Plus   | Yes              | Up to 84% |
| <input type="checkbox"/>      | Made-to-Order Sizes or Colors (2 Wks) | N/A                                               |   | N/A                          | —             | 0.90           | HumiGuard Plus    | Yes              | Up to 84% |
|                               |                                       | NOTE: Up to 6 Weeks for Color & Size Combinations |   |                              |               |                |                   |                  |           |

\* For other ceiling panel options, refer to page 4.

<sup>1</sup> Total Acoustics® ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product. **GOOD** (NRC 0.60-0.65; CAC 35+) **BETTER** (NRC 0.70-0.75; CAC 35+) **BEST** (NRC 0.80+; CAC 35+)


| Description                                   | Interlude® XL® HRC                 | Suprafine®                      |
|-----------------------------------------------|------------------------------------|---------------------------------|
| <b>Main Beams</b>                             |                                    |                                 |
| 12' HD Main Beam Routs 6" O.C.                | <input type="checkbox"/> 6101HRC   | <input type="checkbox"/> 7501   |
| 8' HD Main Beam Routs 6" O.C.                 | <input type="checkbox"/> 6125HRC   | <input type="checkbox"/> 7525   |
| 6' HD Main Beam Routs 6" O.C.                 | <input type="checkbox"/> 6124HRC   | <input type="checkbox"/> 7524   |
| <b>Cross Tees</b>                             |                                    |                                 |
| 8' Cross Tee Routs at 24", 46", 48", 50", 72" | <input type="checkbox"/> XL6189HRC | <input type="checkbox"/> XL7589 |
| 4' Cross Tee Routs at 22", 24", 26"           | <input type="checkbox"/> XL6149HRC | <input type="checkbox"/> XL7543 |
| 46" Cross Tee Routs at 22"                    | <input type="checkbox"/> XL6147HRC | <input type="checkbox"/> XL7547 |
| 24" Cross Tee                                 | <input type="checkbox"/> XL6120HRC | <input type="checkbox"/> XL7520 |
| 22" Cross Tee                                 | <input type="checkbox"/> XL6122HRC | <input type="checkbox"/> XL7522 |
| Grid Adapter (9" and 15")                     | <input type="checkbox"/> GA6199HRC | <input type="checkbox"/> GA7599 |

| Item No.                      | Description                                                                           |
|-------------------------------|---------------------------------------------------------------------------------------|
| <b>Accessories</b>            |                                                                                       |
| <input type="checkbox"/> LCB4 | 4" Lighting Connector Bracket                                                         |
| <input type="checkbox"/> TZYK | TechZone® Ceiling Systems Continuous Lighting Yoke (for 4" to 6" wide light fixtures) |
| <input type="checkbox"/> STAC | Single Tee Adapter Clip                                                               |

## CONTINUOUS LIGHT FIXTURE LAYOUT – 10' ON-CENTER

## 16' LINEAR LIGHTS WITH 9/16" SUSPENSION SYSTEM AND CEILING PANELS

FOR  
SILHOUETTE®  
1/4" AND 1/8"  
REVEAL

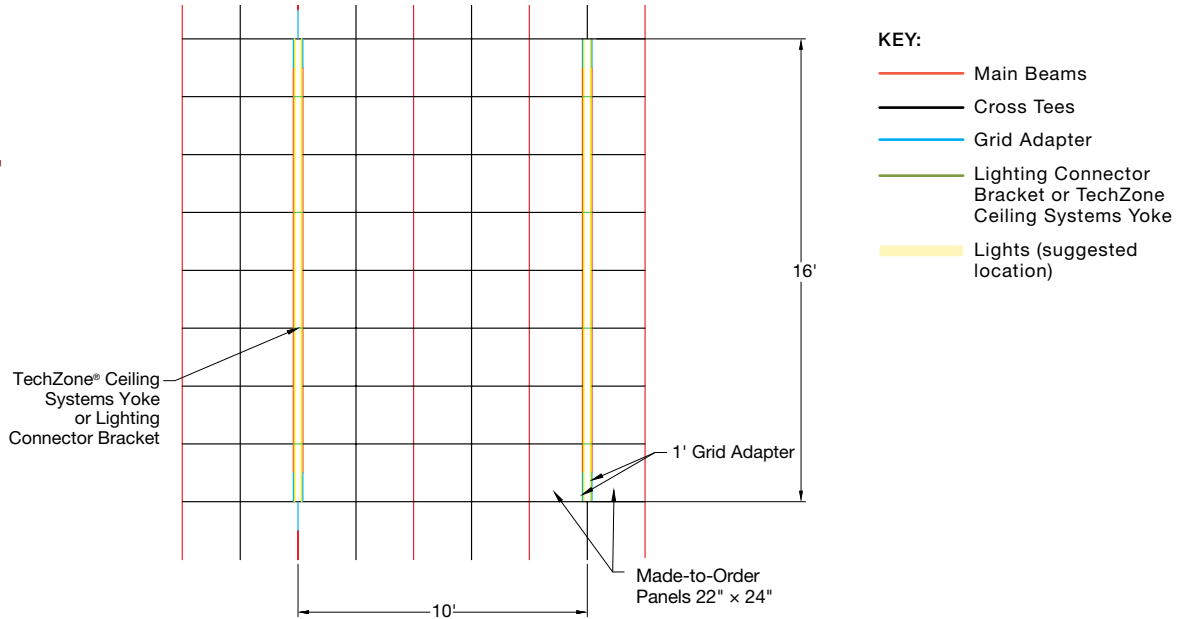

| Item No.                          | Description                                       | UL Classified Acoustics                                                             |                                                                                       | Total Acoustics <sup>1</sup>                                                                         | Light Reflect | Sag Resistance  | Recycling Program | Recycled Content |
|-----------------------------------|---------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|---------------|-----------------|-------------------|------------------|
|                                   |                                                   |  | +  |                                                                                                      |               |                 |                   |                  |
| Ceiling Panels*                   |                                                   |                                                                                     |                                                                                       |                                                                                                      |               |                 |                   |                  |
| <input type="checkbox"/> 1912     | Ultima® 24" × 24" Beveled Tegalur                 | 0.75                                                                                | 35                                                                                    | <b>BETTER</b><br> | 0.90          | HumiGuard® Plus | Yes               | Up to 84%        |
| <input type="checkbox"/> 1CTN MIN | Made-to-Order Sizes or Colors (2 Wks)             | N/A                                                                                 | N/A                                                                                   | —                                                                                                    | 0.90          | HumiGuard Plus  | Yes               | Up to 84%        |
|                                   | NOTE: Up to 6 Weeks for Color & Size Combinations |                                                                                     |                                                                                       |                                                                                                      |               |                 |                   |                  |

\* For other ceiling panel options, refer to page 4.

<sup>1</sup> Total Acoustics® ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product. **GOOD** (NRC 0.60-0.65; CAC 35+) **BETTER** (NRC 0.70-0.75; CAC 35+) **BEST** (NRC 0.80+; CAC 35+)


| Description                                   | Silhouette® 1/4"                | Silhouette 1/8"                  | Silhouette Notes                                                                                   |
|-----------------------------------------------|---------------------------------|----------------------------------|----------------------------------------------------------------------------------------------------|
| <b>Main Beams</b>                             |                                 |                                  |                                                                                                    |
| 12' HD Main Beam Routs 6" O.C.                | <input type="checkbox"/> 76123  | <input type="checkbox"/> 761238  | Routs 12" O.C., Single notch 24" O.C.                                                              |
| 8' HD Main Beam Routs 6" O.C.                 | <input type="checkbox"/> 76121  | <input type="checkbox"/> 761218  | Routs 12" O.C., Single notch 24" O.C.                                                              |
| 6' HD Main Beam Routs 6" O.C.                 | <input type="checkbox"/> 76120  | <input type="checkbox"/> 761208  | Routs 12" O.C., Single notch 24" O.C.                                                              |
| <b>Cross Tees</b>                             |                                 |                                  |                                                                                                    |
| 8' Cross Tee Routs at 24", 46", 48", 50", 72" | <input type="checkbox"/> XL7689 | <input type="checkbox"/> XL76898 | Routs 12" O.C., Double Notch at 24", 72", notched one side at 46", 50" and on opposite side at 48" |
| 4' Cross Tee Routs at 22", 24", 26"           | <input type="checkbox"/> XL7649 | <input type="checkbox"/> XL76498 | Notched one side only at 22", 26" and on opposite side at 24"                                      |
| 46" Cross Tee Routs at 22"                    | <input type="checkbox"/> XL7647 | <input type="checkbox"/> XL76478 | Double Notch at 22"                                                                                |
| 24" Cross Tee                                 | <input type="checkbox"/> XL7620 | <input type="checkbox"/> XL76208 | Unnotched                                                                                          |
| 22" Cross Tee                                 | <input type="checkbox"/> XL7622 | <input type="checkbox"/> XL76228 | Unnotched                                                                                          |
| Grid Adapter (1')                             | <input type="checkbox"/> GA7699 | <input type="checkbox"/> GA76998 | Unnotched                                                                                          |

| Item No.                      | Description                                                                           |
|-------------------------------|---------------------------------------------------------------------------------------|
| <b>Accessories</b>            |                                                                                       |
| <input type="checkbox"/> LCB4 | 4" Lighting Connector Bracket                                                         |
| <input type="checkbox"/> TZYK | TechZone® Ceiling Systems Continuous Lighting Yoke (for 4" to 6" wide light fixtures) |
| <input type="checkbox"/> STAC | Single Tee Adapter Clip                                                               |

# ON-CENTER LINEAR LIGHTING

## DISCONTINUOUS LIGHT FIXTURE LAYOUT – 6' ON-CENTER

### 4' LINEAR LIGHTS WITH 9/16" SUSPENSION SYSTEM AND CEILING PANELS

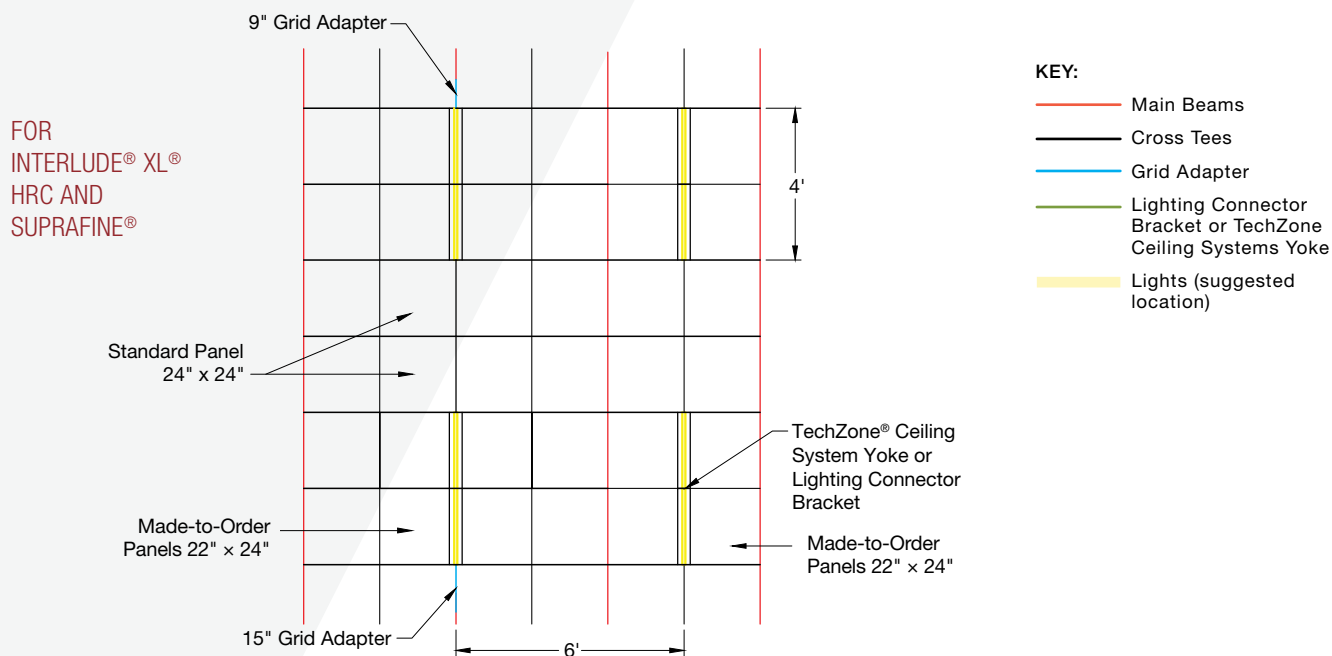

| Item No.                                          | Description                           | UL Classified Acoustics |   |     | Total Acoustics <sup>1</sup> | Light Reflect | Sag Resistance  | Recycling Program | Recycled Content |
|---------------------------------------------------|---------------------------------------|-------------------------|---|-----|------------------------------|---------------|-----------------|-------------------|------------------|
|                                                   |                                       | NRC                     | + | CAC |                              |               |                 |                   |                  |
| Ceiling Panels*                                   |                                       |                         |   |     |                              |               |                 |                   |                  |
| <input type="checkbox"/> 1912                     | Ultima® 24" × 24" Beveled Tegal       | 0.75                    |   | 35  | BETTER                       | 0.90          | HumiGuard® Plus | Yes               | Up to 84%        |
| <input type="checkbox"/>                          | Made-to-Order Sizes or Colors (2 Wks) | N/A                     |   | N/A | —                            | 0.90          | HumiGuard Plus  | Yes               | Up to 84%        |
| NOTE: Up to 6 Weeks for Color & Size Combinations |                                       |                         |   |     |                              |               |                 |                   |                  |

\* For other ceiling panel options, refer to page 4.


<sup>1</sup> Total Acoustics® ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product. **GOOD** (NRC 0.60-0.65; CAC 35+) **BETTER** (NRC 0.70-0.75; CAC 35+) **BEST** (NRC 0.80+; CAC 35+)

| Description                                   | Interlude®                         | Suprafine®                      |
|-----------------------------------------------|------------------------------------|---------------------------------|
| <b>Main Beams</b>                             |                                    |                                 |
| 12' HD Main Beam Routs 6" O.C.                | <input type="checkbox"/> 6101HRC   | <input type="checkbox"/> 7501   |
| <b>Cross Tees</b>                             |                                    |                                 |
| 8' Cross Tee Routs at 24", 46", 48", 50", 72" | <input type="checkbox"/> XL6189HRC | <input type="checkbox"/> XL7589 |
| 4' Cross Tee Routs at 22", 24", 26"           | <input type="checkbox"/> XL6149HRC | <input type="checkbox"/> XL7543 |
| 48" Cross Tee Routs at 24"                    | <input type="checkbox"/> XL6140HRC | <input type="checkbox"/> XL7540 |
| 46" Cross Tee Routs at 22"                    | <input type="checkbox"/> XL6147HRC | <input type="checkbox"/> XL7547 |
| 24" Cross Tee                                 | <input type="checkbox"/> XL6120HRC | <input type="checkbox"/> XL7520 |
| 22" Cross Tee                                 | <input type="checkbox"/> XL6122HRC | <input type="checkbox"/> XL7522 |
| Grid Adapter                                  | <input type="checkbox"/> GA6199HRC | <input type="checkbox"/> GA7599 |

| Item No.                      | Description                                                                           |
|-------------------------------|---------------------------------------------------------------------------------------|
| <b>Accessories</b>            |                                                                                       |
| <input type="checkbox"/> LCB4 | 4" Lighting Connector Bracket                                                         |
| <input type="checkbox"/> TZYK | TechZone® Ceiling Systems Continuous Lighting Yoke (for 4" to 6" wide light fixtures) |
| <input type="checkbox"/> STAC | Single Tee Adapter Clip                                                               |

## DISCONTINUOUS LIGHT FIXTURE LAYOUT – 6' ON-CENTER

## 4' LINEAR LIGHTS WITH 9/16" SUSPENSION SYSTEM AND CEILING PANELS

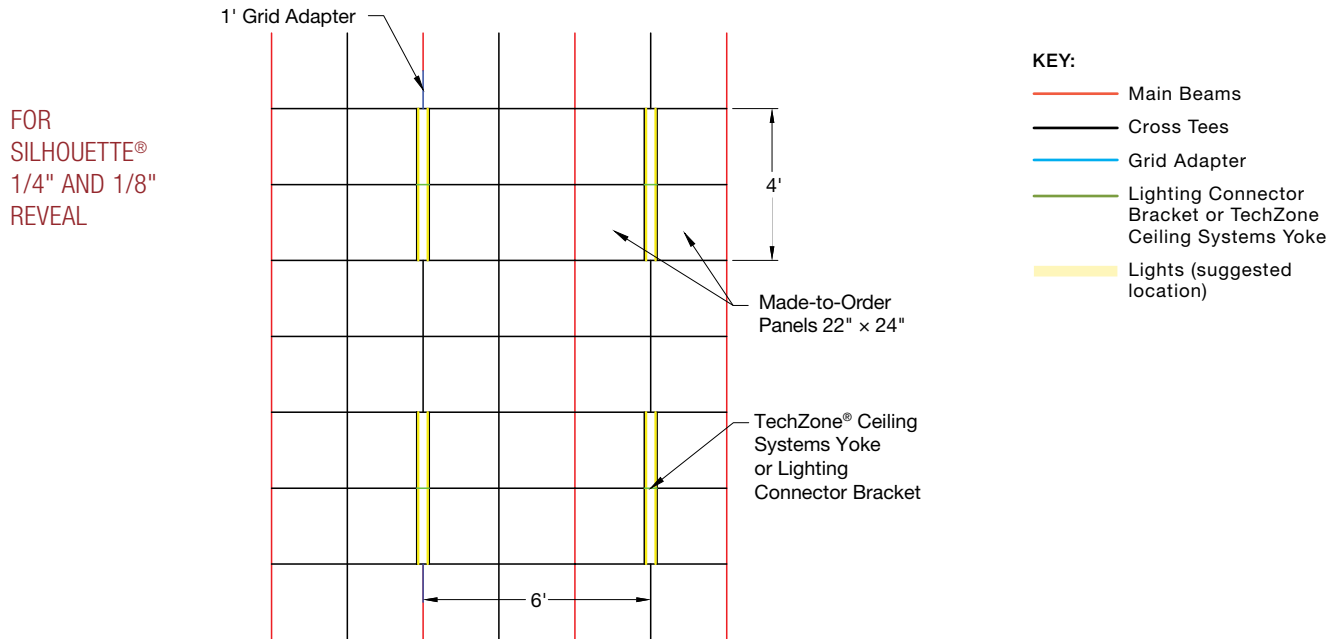

| Item No.                                                                | Description                                       | UL Classified Acoustics |   |     | Total Acoustics <sup>1</sup> | Light Reflect | Sag Resistance  | Recycling Program | Recycled Content |
|-------------------------------------------------------------------------|---------------------------------------------------|-------------------------|---|-----|------------------------------|---------------|-----------------|-------------------|------------------|
|                                                                         |                                                   | NRC                     | + | CAC |                              |               |                 |                   |                  |
| Ceiling Panels*                                                         |                                                   |                         |   |     |                              |               |                 |                   |                  |
| <input type="checkbox"/> 1912                                           | Ultima® 24" × 24" Beveled Tegalur                 | 0.75                    |   | 35  | BETTER                       | 0.90          | HumiGuard® Plus | Yes               | Up to 84%        |
| <input type="checkbox"/> 1CTN MIN Made-to-Order Sizes or Colors (2 Wks) | Ultima 22" × 24"                                  | N/A                     |   | N/A | –                            | 0.90          | HumiGuard Plus  | Yes               | Up to 84%        |
|                                                                         | NOTE: Up to 6 Weeks for Color & Size Combinations |                         |   |     |                              |               |                 |                   |                  |

\* For other ceiling panel options, refer to page 4.

<sup>1</sup> Total Acoustics® ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product. **GOOD** (NRC 0.60-0.65; CAC 35+) **BETTER** (NRC 0.70-0.75; CAC 35+) **BEST** (NRC 0.80+; CAC 35+)

| Description                                   | Silhouette® 1/4"                                                                      | Silhouette 1/8"                  | Silhouette Notes                                                                                    |
|-----------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------|-----------------------------------------------------------------------------------------------------|
| <b>Main Beams</b>                             |                                                                                       |                                  |                                                                                                     |
| 12' HD Main Beam Routs 6" O.C.                | <input type="checkbox"/> 76123                                                        | <input type="checkbox"/> 761238  | Routs 12" O.C., Single notch 24" O.C.                                                               |
| <b>Cross Tees</b>                             |                                                                                       |                                  |                                                                                                     |
| 8' Cross Tee Routs at 24", 46", 48", 50", 72" | <input type="checkbox"/> XL7689                                                       | <input type="checkbox"/> XL76898 | Routs 12" O.C., Double Notch at 24", 72", notched one side at 46", 50", and on opposite side at 48" |
| 4' Cross Tee Routs at 22", 24", 26"           | <input type="checkbox"/> XL7649                                                       | <input type="checkbox"/> XL76498 | Routs 12" O.C., Double Notch at 22", 26", and on opposite side at 24"                               |
| 48" Cross Tee Routs at 24"                    | <input type="checkbox"/> XL7646                                                       | <input type="checkbox"/> XL76468 | Single Notch 24" O.C.                                                                               |
| 46" Cross Tee Routs at 22"                    | <input type="checkbox"/> XL7647                                                       | <input type="checkbox"/> XL76478 | Double Notch at 22"                                                                                 |
| 24" Cross Tee                                 | <input type="checkbox"/> XL7620                                                       | <input type="checkbox"/> XL76208 | Unnotched                                                                                           |
| 22" Cross Tee                                 | <input type="checkbox"/> XL7622                                                       | <input type="checkbox"/> XL76228 | Unnotched                                                                                           |
| Grid Adapter                                  | <input type="checkbox"/> GA7699                                                       | <input type="checkbox"/> GA76998 | Unnotched                                                                                           |
| <b>Accessories</b>                            |                                                                                       |                                  |                                                                                                     |
| <input type="checkbox"/> LCB4                 | 4" Lighting Connector Bracket                                                         |                                  |                                                                                                     |
| <input type="checkbox"/> TZYK                 | TechZone® Ceiling Systems Continuous Lighting Yoke (for 4" to 6" wide light fixtures) |                                  |                                                                                                     |
| <input type="checkbox"/> STAC                 | Single Tee Adapter Clip                                                               |                                  |                                                                                                     |

# TAKE THE NEXT STEP

**877 276-7876**

Customer Service Representatives  
7:45 a.m. to 5:00 p.m. EST  
Monday through Friday

**TechLine** – Technical information, detail drawings,  
CAD design assistance, installation information,  
other technical services – 8:00 a.m. to 5:30 p.m. EST,  
Monday through Friday.

FAX: 800 572 8324 or  
Email: [techline@armstrongceilings.com](mailto:techline@armstrongceilings.com)

**[armstrongceilings.com/commercial](http://armstrongceilings.com/commercial)**

Latest product news  
Standard and custom product information  
Online catalog  
CAD, Revit®, SketchUp® files  
A Ceiling for Every Space® Visual Selection Tool  
Product literature and samples – express service  
or regular delivery  
Contacts – reps, where to buy, who will install



**[armstrongceilings.com/projectworks](http://armstrongceilings.com/projectworks)**

The power of **ProjectWorks®** Design and  
Pre-construction Service

ProjectWorks offers cutting-edge  
collaborative design services to ensure your  
projects are completed with unmatched  
precision and efficiency.

Receive 2D layouts, material budgets, and  
detailed 3D Revit® models to speed up  
project timelines and improve coordination.

Design with confidence. Partner with  
ProjectWorks today! Get started at  
[armstrongceilings.com/projectworks](http://armstrongceilings.com/projectworks)

LEED is a registered trademark of the U.S. Green Building Council  
SketchUp® is a registered trademark of Trimble Navigation Limited  
Revit® is a registered trademark of Autodesk, Inc.; BASO™ is a trademark of BASO, Inc.  
All other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates  
© 2025 AWI Licensing LLC • Printed in the United States of America

**TechLine / 877 276-7876**  
**[armstrongceilings.com/linearlighting](http://armstrongceilings.com/linearlighting)**

# Armstrong®

World Industries