

METALWORKS™ Mesh


Lay-in & Tegular



FAST 134
Select Items Ship Fast
armstrongceilings.com/fast134



CAD/Revit® drawings at:
armstrongceilings.com/cadrevit



MetalWorks Mesh panels in Nickel Chrome finish: 24" × 48", 24" × 72", and 24" × 96" Trellis and Lattice panels; 24" × 24" Scallops panels; suspension system and Axiom® trim in Gun Metal Grey

armstrongceilings.com/capabilities
See more photos at:
armstrongceilings.com/photogallery


MetalWorks™ Mesh panels provide an industrial look for interior spaces in a variety of sizes, patterns, and finishes.

KEY SELECTION ATTRIBUTES

- Large format 24" × 48", 24" × 72", and 24" × 96" lay-in ceiling panels available as standard items in select patterns
- MetalWorks™ Mesh are part of the Sustain™ portfolio and meet the most stringent industry sustainability compliance standards today
- Twenty-five standard patterns on 24" × 24" ceiling panels, custom patterns and colors also available
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim
- Select products included in the FAST134 program – ready to ship in 4 weeks or less
- Simple installation – panels lay in standard 15/16" suspension system with borders or finished edges
- Factory-engineered border around panel edges for safe, fast installation into grid system
- Black acoustical infill panels provide high sound absorption and help conceal elements in the plenum
- For custom options contact ASQuote@armstrongceilings.com

MESH FINISHES

Powder Coated

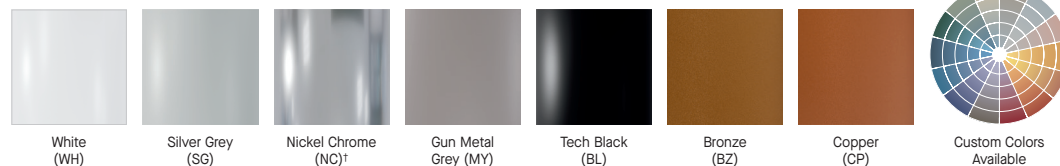

Due to printing limitations, shade may vary from actual product.

* Only available on 24" × 24" panels

† Not available as a coordinating suspension system color


Anodized for Cascades



Plated Antique Nickel



COORDINATING SUSPENSION SYSTEM COLORS

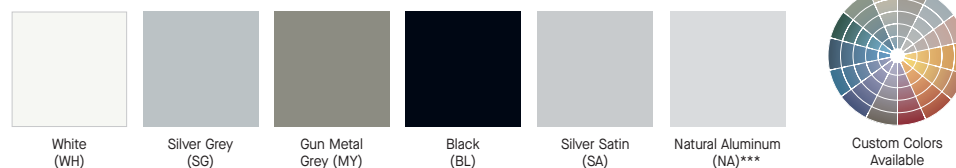

NOTE: Accessories and clips (such as BERC2 clip) can be specified to color match the suspension system.

*** Not available as a standard option.

Mesh patterns leave suspension system visible.
When mill-finish steel is not a desired look, request 360-painted grid.

TechLine 877 276-7876
armstrongceilings.com/mesh

Armstrong®
World Industries

METALWORKS™ Mesh

Lay-in & Tegular



LEED® WELL™ LBC

UP TO **85%** RECYCLED CONTENT

✓

✓

✓

✓

energy management
 construction waste mgmt
 regional materials
 design for flexibility
 EPD
 recyclable/ biobased materials
 recycled content
 sourcing of raw materials
 material ingredient reporting
 low emitting materials
 lighting quality
 acoustics


Calculate sustainability with Ecomedes
armstrongceilings.com/ecomedes

LOCATION DEPENDENT

WITH INFILL PANEL

WOVEN WIRE (1:6 scale shown)


Square Weave – Square Lay-in




1Cell
Item 6415AM
Spacing: 0.86" × 0.86"
Wire Diameter: 0.11"
% Open Area: 76%




2Cell
Item 6416AM
Spacing: 1.52" × 1.52"
Wire Diameter: 0.135"
% Open Area: 82%




Twin Round Narrow
Item 6129AM
Spacing: 0.25"/0.62" / 0.25"/0.62"
Wire Diameter: 0.08"
% Open Area: 61%




Twin Flat Narrow
Item 6412AM
Spacing: 0.25"/0.74" / 0.25"/0.74"
Wire Diameter: 0.06" × 0.14"
% Open Area: 53%




Twin Flat Wide
Item 6410AM
Spacing: 0.73"/2.24" / 0.73"/2.24"
Wire Diameter: 0.375" × 0.60"
% Open Area: 56%




Single Flat Narrow
Item 6411AM
Spacing: 0.24" × 0.24"
Wire Diameter: 0.06" × 0.14"
% Open Area: 21%



Single Flat Wide
Item 8199AM
Spacing: 1.28" × 1.28"
Wire Dimension: 0.375" × 0.60"
% Open Area: 51%




Quad Round Narrow
Item 8198AM
Spacing: 0.71" × 0.71"
Wire Diameter: 0.135"
% Open Area: 77%



Over-Under Square
Item 8200AM
Spacing: 0.58" × 0.58"
Wire Dimension: 0.250" × 0.063"
% Open Area: 34%


Linear Weave – Square Lay-in




Single Mini
Item 6413AM
Spacing: 0.13" × 0.375"
Wire Diameter: 0.06"
% Open Area: 57%



Single Narrow
Item 6414AM
Spacing: 0.25" × 1.1"
Wire Diameter: 0.105"
% Open Area: 52%




Triple Narrow
Item 6128AM
Spacing: 0.375" × 3.15"
Wire Diameter: 0.12"
% Open Area: 62%



Fine Rectangular
Item 8203AM
Spacing: 0.18" × 0.5"
Wire Dimension: 0.08"
% Open Area: 47%

Linear Weave – Tegular



Fine Rectangular
Item 8195AM
Spacing: 0.18" × 0.5"
Wire Dimension: 0.08"
% Open Area: 47%

Diamond Weave – Square Lay-in




1Diamond
Item 6417AM
Spacing: 0.86" × 0.86"
Wire Diameter: 0.11"
% Open Area: 76%




2Diamond
Item 6418AM
Spacing: 1.52" × 1.52"
Wire Diameter: 0.14"
% Open Area: 82%

Round Weave – Square Lay-in




Round Rectangular
Item 8201AM
Wire Diameter: 0.08"
% Open Area: 75%




Twin Circle
Item 8202AM
Wire Diameter: 0.08"
% Open Area: 41%

Wire Key




WELDED WIRE (Actual 1:6 scale shown)


Welded Wire – Square Lay-in



1Cell
Item 6131AM
Spacing: 1.0" × 1.0"
Wire Diameter: 0.120"
% Open Area: 76%




2Cell
Item 6132AM
Spacing: 2.0" × 2.0"
Wire Diameter: 0.120"
% Open Area: 88%




3Cell
Item 6133AM
Spacing: 3.0" × 3.0"
Wire Diameter: 0.120"
% Open Area: 92%

Welded Wire – Tegular



1Cell
Item 8190AM
Wire Diameter: 0.120"
Tegular Edge Rod: 0.312"
% Open Area: 78%




2Cell
Item 8191AM
Wire Diameter: 0.120"
Tegular Edge Rod: 0.312"
% Open Area: 88%




Linear Channeled
Item 8196AM & 8197AM
Wire Diameter: 0.192"
Wire Dimension: 1.0" × 0.5" Channel
% Open Area: 50%
% Open Area with Center Hole: 60%

EXPANDED METAL (Actual 1:6 scale shown)


Expanded Metal – Square Lay-in




Lattice
Item 6136AM
Spacing: 0.036"
% Open Area: 73%
SWD 0.25"
LWD 0.5"



Scallops
Item 6137AM
Spacing: 0.048"
% Open Area: 61%
SWD 0.35"
LWD 0.49"




Trellis
Item 6138AM
Spacing: 0.060"
% Open Area: 70%
SWD 0.515"
LWD 1.2"




Cascades
Item 6139AM
Spacing: 0.080"
% Open Area: 23%
SWD 0.90"
LWD 2.0"


Expanded Metal – Tegular



Lattice
Item 8192AM
Wire Diameter: N/A
% Open Area: 73%
SWD 0.25"
LWD 0.5"




Scallops
Item 8193AM
Wire Diameter: N/A
% Open Area: 61%
SWD 0.35"
LWD 0.49"



Trellis
Item 8194AM
Wire Diameter: N/A
% Open Area: 70%
SWD 0.515"
LWD 1.2"

Expanded Metal Key



SWD – Short Way of Design
LWD – Long Way of Design

METALWORKS™ Mesh

Lay-in & Tegular



LEED WELL LBC

UP TO 85% RECYCLED CONTENT

energy management

construction waste mgmt

regional materials

design for flexibility

EPD

recyclable/extended producer resp.

biobased materials

recycled content

sourcing of raw materials

material ingredient reporting

low emitting materials

lighting quality

acoustics

Calculate sustainability with Ecomedes
armstrongceilings.com/ecomedes

VISUAL SELECTION

	Item No. ♦	Description	Panel Dimensions W × L × H (Inches)
WOVEN WIRE Square Weave Square Lay-in	6129AM __	Twin Round Narrow	24 × 24 × 1/4"
	6410AM __	Twin Flat Wide	24 × 24 × 1/4"
	6411AM __	Single Flat Narrow	24 × 24 × 1/4"
	6412AM __	Twin Flat Narrow	24 × 24 × 1/4"
	6415W24L24 __	1Cell	24 × 24 × 1/4"
	6415W24L48 __	1Cell	24 × 48 × 1/4"
	6415W24L72 __	1Cell	24 × 72 × 1/4"
	6415W24L96 __	1Cell	24 × 96 × 1/4"
	6416W24L24 __	2Cell	24 × 24 × 1/4"
	6416W24L48 __	2Cell	24 × 48 × 1/4"
	6416W24L72 __	2Cell	24 × 72 × 1/4"
	6416W24L96 __	2Cell	24 × 96 × 1/4"
	8199AM __	Single Flat Wide	24 × 24 × 1/4"
	8198AM __	Quad Round Narrow	24 × 24 × 1/4"
Linear Weave Square Lay-in	8200AM __	Over-Under Square	24 × 24 × 1/4"
	6413AM __	Single Mini	24 × 24 × 1/4"
	6414AM __	Single Narrow	24 × 24 × 1/4"
	6128AM __	Triple Narrow	24 × 24 × 1/4"
	8203AM __	Fine Rectangular	24 × 24 × 1/4"
Linear Weave Square Tegular	8195AM __	Fine Rectangular	24 × 24 × 1/4"
Diamond Weave Square Lay-in	6417AM __	1Diamond	24 × 24 × 1/4"
	6418AM __	2Diamond	24 × 24 × 1/4"
Round Weave Square Lay-in	8201AM __	Round Rectangular	24 × 24 × 1/4"
	8202AM __	Twin Circle	24 × 24 × 1/4"
EXPANDED METAL Square Lay-in	6136W24L24 __	Lattice	24 × 24 × 1/4"
	6136W24L48 __	Lattice	24 × 48 × 1/4"
	6136W24L72 __	Lattice	24 × 72 × 1/4"
	6136W24L96 __	Lattice	24 × 96 × 1/4"
	6137AM __	Scallops	24 × 24 × 1/4"
	6138W24L24 __	Trellis	24 × 24 × 1/4"
	6138W24L48 __	Trellis	24 × 48 × 1/4"
	6138W24L72 __	Trellis	24 × 72 × 1/4"
	6138W24L96 __	Trellis	24 × 96 × 1/4"
	6139AM __	Cascades	24 × 24 × 1/4"
Square Tegular	8192AM __	Lattice	24 × 24 × 1/4"
	8193AM __	Scallops	24 × 24 × 1/4"
	8194AM __	Trellis	24 × 24 × 1/4"

♦ When specifying or ordering, include the appropriate 2-letter color suffix with the item number (e.g., 6129AM .

PERFORMANCE

Dots represent high level of performance.

% Open Area	Fire Rating	CleanAssure™ Disinfectable Panels		
		Fog	Spray	Wipe
61%	Class A	*	*	*
56%	Class A	*	*	*
21%	Class A	*	*	*
53%	Class A	*	*	*
76%	Class A	*	*	*
76%	Class A	*	*	*
76%	Class A	*	*	*
76%	Class A	*	*	*
82%	Class A	*	*	*
82%	Class A	*	*	*
82%	Class A	*	*	*
82%	Class A	*	*	*
51%	Class A	*	*	*
77%	Class A	*	*	*
34%	Class A	*	*	*
57%	Class A	*	*	*
52%	Class A	*	*	*
62%	Class A	*	*	*
47%	Class A	*	*	*
47%	Class A	*	*	*
76%	Class A	*	*	*
82%	Class A	*	*	*
75%	Class A	*	*	*
41%	Class A	*	*	*
73%	Class A	*	*	*
73%	Class A	*	*	*
73%	Class A	*	*	*
73%	Class A	*	*	*
61%	Class A	*	*	*
70%	Class A	*	*	*
70%	Class A	*	*	*
70%	Class A	*	*	*
70%	Class A	*	*	*
23%	Class A	*	*	*
73%	Class A	*	*	*
61%	Class A	*	*	*
70%	Class A	*	*	*

ACOUSTICAL INFORMATION

Patterns with similar open area will achieve similar acoustic results.

% Open Area		Infill Panel Item No.	Dimensions	NRC
	Single Flat Narrow	5823	24" × 24"	0.65
		1713BL	24" × 24"	0.75
		2820BK	24" × 24"	0.80
		2821BK	24" × 48"	0.80
		2864BK	24" × 72"	0.80
	Twin Flat Narrow	5823	24" × 24"	0.75
		1713BL	24" × 24"	0.70
		2820BK	24" × 24"	0.85
		2821BK	24" × 48"	0.85
		2864BK	24" × 72"	0.85
	1Cell	5823	24" × 24"	0.75
		1713BL	24" × 24"	0.70
		2820BK	24" × 24"	0.85
		2821BK	24" × 48"	0.85
		2864BK	24" × 72"	0.85

ACOUSTICAL PANEL INSTALLATION



MetalWorks™ Mesh ceiling panel with Calla® 2820BK infill panel for high NRC performance

METALWORKS™ Mesh

Lay-in & Tegular



LEED® WELL LBC

UP TO 85% RECYCLED CONTENT

energy management

construction waste mgmt

regional materials

design for flexibility

EPD

recyclable/producer resp.

biobased materials

recycled content

sourcing of raw materials

material ingredient reporting

low emitting materials

lighting quality

acoustics

Calculate sustainability with Ecomedes

armstrongceilings.com/ecomedes

LOCATION DEPENDENT

WITH INFILL PANEL

VISUAL SELECTION

	Item No. ♦	Description	Panel Dimensions W x L x H (Inches)
WELDED WIRE	6131W24L24 __	1Cell	24 x 24 x 1/4"
	6131W24L48 __	1Cell	24 x 48 x 1/4"
	6131W24L72 __	1Cell	24 x 72 x 1/4"
	6131W24L96 __	1Cell	24 x 96 x 1/4"
	6132W24L24 __	2Cell	24 x 24 x 1/4"
	6132W24L48 __	2Cell	24 x 48 x 1/4"
	6132W24L72 __	2Cell	24 x 72 x 1/4"
	6132W24L96 __	2Cell	24 x 96 x 1/4"
	6133AM __	3Cell	24 x 24 x 1/4"
	8190AM __	1Cell	24 x 24 x 1/4"
Square Tegular	8191AM __	2Cell	24 x 24 x 1/4"
	8196AM __	Linear Channeled	24 x 24 x 5/8"
	8197AM __	Linear Channeled - Center Hole	24 x 24 x 5/8"


FAST
4 WEEKS
or Less

FAST134 program items ready to ship from manufacturer in 4 weeks or less. Up-to-date lead times and product options (sizes and colors) at armstrongceilings.com/fast134.

♦ When specifying or ordering, include the appropriate 2-letter color suffix with the item number (e.g., 6129AM S G). NOTE: For acoustical infill panel information, see armstrongceilings.com/mwaccessories

SUSPENSION SYSTEMS

15/16"



PHYSICAL DATA

Material

All items, except Cascades panels, are cold-rolled steel. Cascades panels are made of aluminum.

Surface Finish

All panels are available in a range of standard and custom smooth, factory-applied powder-coated finishes. Most panels can also be plated for an Antique Nickel finish which will have a variable patina for an authentic aged visual. The anodized finishes (BA, NA) are available on Cascades panels only.

Fire Performance

Class A: ASTM E84 and CAN/ULC S102. Flame Spread Index 25 or less. Smoke Developed Index 50 or less.

All MetalWorks™ Mesh panels are non-combustible.

As with other architectural features located at the ceiling, Mesh panels may obstruct or skew the planned fire sprinkler water distribution pattern, or possibly delay or accelerate the activation of the sprinkler or fire detection systems by channeling the heat from a fire either toward or away from the device.

For panels that do not meet the criteria for open-suspension a 24" x 24" mineral fiber panel should be placed on the back of the Mesh panel when installing the ceiling, with the sprinkler installed below both panels.

Designers and installers are advised to consult a fire protection engineer, NFPA 13, and local codes for guidance where automatic fire detection and suppression systems are present.

Acoustics Considerations

NRC-tested using white infill panels. Painted panels may experience a slight reduction in NRC due to color painting processes.

Design Considerations

Minimal deflection is expected as panels increase in size. It is possible to see up to 1/2" deflection on Welded and Woven patterns. Panels in Expanded patterns may show additional deflection, resulting in an enhanced industrial visual.

For more open MetalWorks™ Mesh items where the suspension system may be visible through the panels, consider using a 360° Painted Grid System coordinated with the panel color.

Item 8196 should not be field cut. Use Item 8197, with 5" center hole, for sprinklers, lighting, and other mechanicals. Additionally, care should always be taken when cutting metal. Please see installation instructions for specific guidance on each type of mesh panel.

Installation Considerations

For panels over 60" in length, stabilizer bars and hold down clips are required. For custom design assistance contact ASQuote@armstrongceilings.com

The edges of MetalWorks™ Mesh panels feature unique detailing. Use caution and wear appropriate hand and eye protection when installing or cutting these metal panels. Refer to Installation Instructions BPLA-297075 at armstrongceilings.com/metalworks for details and cutting recommendations.

Cleaning and Disinfecting

Cleaning and CDC approved disinfecting options available on armstrongceilings.com/cleaning

FAST134 Program Considerations

Size of Job Matters: Big jobs, over 2500 SF or 50 pieces for shapes/vertical elements will have longer lead times.

Location Matters: Transit time not included. We are ready to ship in 1 week on FAST1 items. However, transit to the states west of Wyoming may add time.

Distributor Truck Schedule Matters: We rely on distribution to help move products around the country. When speed matters, work with your local distributor to ensure FAST134 service.

LEED® is a registered trademark of the U.S. Green Building Council; Living Building Challenge® (LBC) is a registered trademark of the International Living Future Institute; WELL™ and WELL Building Standard™ are trademarks of the International WELL Building Institute; Revit® is a registered trademark of Autodesk, Inc.; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2025 AWI Licensing LLC

PERFORMANCE

Dots represent high level of performance.

% Open Area	Fire Rating	CleanAssure™ Disinfectable Panels		
		Fog	Spray	Wipe
78%	Class A	*	*	*
78%	Class A	*	*	*
78%	Class A	*	*	*
78%	Class A	*	*	*
88%	Class A	*	*	*
88%	Class A	*	*	*
88%	Class A	*	*	*
88%	Class A	*	*	*
92%	Class A	*	*	*
78%	Class A	*	*	*
88%	Class A	*	*	*
50%	Class A	*	*	*
60%	Class A	*	*	*

ACOUSTICAL INFORMATION

Patterns with similar open area will achieve similar acoustic results.

% Open Area	Infill Panel Item No.	Dimensions	NRC
21% Open Area	5823	24" x 24"	0.75
	1713BL	24" x 24"	0.70
	2820BK	24" x 24"	0.85
	2821BK	24" x 48"	0.85
	2864BK	24" x 72"	0.85
53% Open Area	5823	24" x 24"	0.75
	1713BL	24" x 24"	0.70
	2820BK	24" x 24"	0.85
	2821BK	24" x 48"	0.85
	2864BK	24" x 72"	0.85
76% Open Area	5823	24" x 24"	0.75
	1713BL	24" x 24"	0.70
	2820BK	24" x 24"	0.85
	2821BK	24" x 48"	0.85
	2864BK	24" x 72"	0.85

STABILIZER BAR & HOLD DOWN CLIPS

Required for all panels greater than 60" in length

Item No.	Description	Pieces/Carton
7425	Stabilizer Bar	100
CHDC	Clear Hold Down Clips	50
5600HDC	5600 Hold Down Clips	200

Stock vs Made-to-Order Matters: FAST3 & FAST4 items are made-to-order and will ship direct to distributor. FAST1 (stocked items) will go through distribution and depend on distributor truck schedules.

Warranty

Details at armstrongceilings.com/warranty

Weight/Panel (Bulk Packed)

6411 - 8.2 lbs/pc	6136W24L24 - 2.6 lbs/pc
6413 - 5.1 lbs/pc	6136W24L48 - 5.2 lbs/pc
6414 - 6.9 lbs/pc	6136W24L72 - 7.7 lbs/pc
6415W24L24 - 3.85 lbs/pc	6136W24L96 - 5.2 lbs/pc
6415W24L48 - 7.7 lbs/pc	6138W24L24 - 1.55 lbs/pc
6415W24L72 - 11.4 lbs/pc	6138W24L48 - 3.1 lbs/pc
6415W24L96 - 15.1 lbs/pc	6138W24L72 - 4.5 lbs/pc
6416W24L24 - 1.95 lbs/pc	6138W24L96 - 10 lbs/pc
6416W24L48 - 3.9 lbs/pc	6412AM - 4.8 lbs/pc
6416W24L72 - 10.7 lbs/pc	6137AM - 2.8 lbs/pc
6416W24L96 - 14.1 lbs/pc	6139AM - 2.1 lbs/pc
6417 - 3.3 lbs/pc	8190AM - 4.4 lbs/pc
6418 - 3.2 lbs/pc	8191AM - 3.2 lbs/pc
6128AM - 4.2 lbs/pc	8192AM - 1.9 lbs/pc
6129AM - 6 lbs/pc	8193AM - 2.3 lbs/pc
6131W24L24 - 3.55 lbs/pc	8194AM - 3.0 lbs/pc
6131W24L48 - 7.1 lbs/pc	8196AM - 7.9 lbs/pc
6131W24L72 - 10.9 lbs/pc	8197AM - 7.3 lbs/pc
6131W24L96 - 14.6 lbs/pc	8198AM - 4.8 lbs/pc
6132W24L24 - 1.95 lbs/pc	8199AM - 6.5 lbs/pc
6132W24L48 - 3.9 lbs/pc	8200AM - 8.1 lbs/pc
6132W24L72 - 5.8 lbs/pc	8195AM - 7.4 lbs/pc
6132W24L96 - 7.7 lbs/pc	8203AM - 7.0 lbs/pc
6133AM - 1.6 lbs/pc	8201AM - 4.5 lbs/pc
6410AM - 4.8 lbs/pc	8202AM - 7.7 lbs/pc

Minimum Order Quantity
24" x 24" panels - 100 SF
all other sizes - 500 SF

TechLine / 1 877 276-7876
armstrongceilings.com/mesh
BPCS-5114-525

Armstrong®
World Industries

METALWORKS™ - Standard