

OPTIMA®
OPTIMA® PB
with Plant-based Binder
Tegular
fine texture


SUSTAIN®
High Performance
Sustainable
Ceiling Systems
(PB Suffix Only)

CAD/Revit® drawings at:
armstrongceilings.com/cadrevit



DESIGNFlex®
A New World of Choice
for Ceiling Systems



plus capabilities
to do more



▲ Optima® Tegular 24" x 24" panels with Suprafine® 9/16" suspension system

armstrongceilings.com/capabilities
See more photos at:
armstrongceilings.com/photogallery

Fine-textured panels with more large-size, standard panel options than any other product family. Offers high sound absorption.

KEY SELECTION ATTRIBUTES


- DesignFlex® options include shapes and made-to-order sizes available to ship in 3 weeks
- Optima® PB panels are part of the Sustain® portfolio, and meet the most stringent industry sustainability compliance standards today
- Smooth, clean, durable finish – Washable, Impact-resistant, Scratch-resistant, Soil-resistant
- Items with PB suffix are manufactured with a plant-based binder
- Outstanding acoustical performance for open plan areas, both Articulation Class 180-190 and NRC 0.90-1.00
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim
- Mold- and mildew-resistant surface
- Energy-saving high light-reflective finish
- Non-directional visual reduces scrap and installation time
- Sag-resistant large-size panels
- Compatible with TechZone® Ceiling Systems
- 30-Year Limited System Warranty against visible sag, mold, and mildew
- Available with factory-cut holes for USAI® trimless downlight fixture integration.

COLOR



White
(WH)

DETAILS (Other Suspension Systems compatible. Refer to listing on next page.)

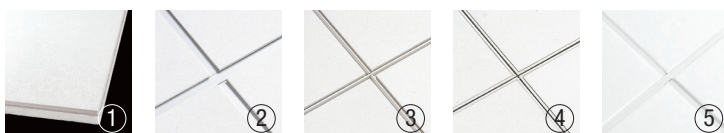

1. Optima® Square Tegular
2. Optima® Tegular with Prelude® 15/16" suspension system
3. Optima® Tegular with Interlude® XL® HRC 9/16" suspension system
4. Optima® Tegular with Silhouette® 9/16" suspension system with 1/8" reveal
5. Suprafine® ML, XL®, and XL® HRC with Blizzard White finish

TechLine 877 276-7876
armstrongceilings.com/optima


CEILING & WALL SOLUTIONS

**OPTIMA®
OPTIMA® PB**
with Plant-based Binder
Tegular
fine texture

Declare.
(PB Suffix Only)

SUSTAIN®
High Performance
Sustainable Ceiling Systems
(PB Suffix Only)
GREENGUARD
Gold Certified
(details below)

LEED® WELL™ LBC UP TO **71% RECYCLED CONTENT**

energy management construction waste mgmt regional materials design for flexibility EPD recyclable/excise producer resp. biobased materials recycled content sourcing of raw materials material ingredient reporting low emitting materials lighting quality acoustics

LOCATION DEPENDENT PB ONLY PB ONLY PB ONLY

Calculate sustainability with Green Genie™
armstrongceilings.com/greengenie

VISUAL SELECTION

armstrongceilings.com/suspdwgs	Susp. Dwg.	Item No.	Dimensions (Inches)	
OPTIMA® 15/16" Square Tegular		1402	6 x 48 x 1"	
		1406	6 x 60 x 1"	
		3264	12 x 24 x 1"	
		3278	20 x 60 x 1"	
		3250 3250PB	24 x 24 x 1"	
		3354	24 x 24 x 1"	
		3253	24 x 24 x 1-1/2"	
		3252 3252PB	24 x 48 x 1"	
		3281	24 x 72 x 1"	
		3282	24 x 96 x 1"	
		3258	30 x 30 x 1"	
		3286	30 x 60 x 1"	
		3255 3255PB	48 x 48 x 1"	

PERFORMANCE SELECTION Dots represent high level of performance.

UL Classified Acoustics	Total Acoustics ¹	Articulation Class	Fire Performance	Light Reflect	Anti-Mold/Mildew	Sag Resistant	Certified Low VOC Emissions	CleanAssure™ Disinfectable Panels	DURABILITY	Recycle Program				
NRC + CAC =	AC	Class	Class	Light Reflect	Anti-Mold/Mildew	Sag Resistant	Certified Low VOC Emissions	Fog	Wash	Impact	Scratch	Soil	Recycle Program	30-Yr Warranty
N/A	N/A	N/A	N/A	Class 0.88	•	•	N/A	•	•	•	•	•	•	•
N/A	N/A	N/A	N/A	Class 0.88	•	•	N/A	•	•	•	•	•	•	•
0.95	N/A	N/A	190	Class 0.88	•	•	N/A	•	•	•	•	•	•	•
0.95	N/A	N/A	190	Class 0.88	•	•	N/A	•	•	•	•	•	•	•
0.95	N/A	N/A	190	Class 0.88	•	•	N/A	•	•	•	•	•	•	•
0.90	26	N/A	190	Class 0.88	•	•	N/A	•	•	•	•	•	•	N/A
1.00	N/A	N/A	190	Class 0.88	•	•	N/A	•	•	•	•	•	•	•
0.95	N/A	N/A	190	Class 0.88	•	•	N/A	•	•	•	•	•	•	•
0.95	N/A	N/A	190	Class 0.88	•	•	N/A	•	•	•	•	•	•	•
0.95	N/A	N/A	190	Class 0.88	•	•	N/A	•	•	•	•	•	•	•
0.95	N/A	N/A	190	Class 0.88	•	•	N/A	•	•	•	•	•	•	•
0.95	N/A	N/A	190	Class 0.88	•	•	N/A	•	•	•	•	•	•	•

¹ Total Acoustics® ceiling panels have an ideal combination of sound absorption and sound blocking in one product. Optima® items with the PB suffix are included in the Sustain® portfolio and carry Declare® certification.

MORE ITEMS ▶

PHYSICAL DATA

Material
3354 – Fiberglass with DuraBrite® acoustically transparent membrane; CAC backing
All other items – Fiberglass with DuraBrite acoustically transparent membrane

Surface Finish
DuraBrite scrim with factory-applied latex paint

Fire Performance
Class A: ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index of 25 or less. Smoke Developed Index of 50 or less (UL labeled).

ASTM E1264 Classification
Type XII, Form 2, Pattern E
Fire Class A

Humidity/Sag Resistance
HumiGuard® Plus ceiling panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

Anti-Mold/Mildew
Ceiling tiles with BioBlock® performance resist the growth of mold and mildew on the tile surface.

VOC Emissions
(PB suffix items only)
GREENGUARD Gold Certified
This product has been UL validated to be Formaldehyde-Free. UL.COM/ECV.
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED® WELL Building Standard™, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

Primary (Embodied) Energy
See all LCA information on our EPDs.

High Recycled Content
Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

Acoustical Details
Some items have CAC backing. CAC backing may be available as a special order. A CAC value of 37 can be achieved by backloading fiberglass products with item 769 or 770.

Insulation Value
3253 – R Factor – 6.0 (BTU units)
R Factor – 1.05 (Watts units)
3281, 3282 – R Factor – 3.0 (BTU units)
R Factor – 0.53 (Watts units)
All other items – R Factor – 4.0 (BTU units)
R Factor – 0.70 (Watts units)

PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS
UL.COM/GG
UL 2818



Cleaning and Disinfecting
Cleaning and CDC recommended disinfecting options available on armstrongceilings.com/cleaning

30-Year Performance Guarantee & Warranty
When installed with Armstrong® Suspension System. Details at armstrongceilings.com/warranty

Weight: Square Feet/Carton
1402 – 0.55 lbs/SF; 24 SF/ctn
1406 – 0.55 lbs/SF; 30 SF/ctn
3250, 3250PB – 0.46 lbs/SF; 48 SF/ctn
3252, 3252PB – 0.55 lbs/SF; 96 SF/ctn
3282 – 0.42 lbs/SF; 96 SF/ctn
3264 – 0.55 lbs/SF; 48 SF/ctn
3253 – 0.64 lbs/SF; 32 SF/ctn
3255, 3255PB – 0.55 lbs/SF; 96 SF/ctn
3258 – 0.55 lbs/SF; 75 SF/ctn
3278, 3286 – 0.55 lbs/SF; 100 SF/ctn
3281 – 0.55 lbs/SF; 72 SF/ctn
3282 – 0.42 lbs/SF; 96 SF/ctn
3354 – 0.47 lbs/SF; 48 SF/ctn

Minimum Order Quantity
1 carton

Metric Items Available
3250M, 3252M, 3253M, 3354M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.

OPTIMA®
OPTIMA® PB
 with Plant-based Binder
 Tegular
 fine texture



SUSTAIN®
 High Performance
 Sustainable Ceiling Systems
 (PB Suffix Only)

Declare.
 (PB Suffix Only)

GREENGUARD
 Gold Certified

LEED® WELL™ LBC

UP TO **71%** RECYCLED CONTENT

- energy management
- construction waste mgmt
- regional materials
- design for flexibility
- EPD
- recyclable/extended producer resp.
- biobased materials
- recycled content
- sourcing of raw materials
- material ingredient reporting
- low emitting materials
- lighting quality
- acoustics

LOCATION DEPENDENT PB ONLY PB ONLY

Calculate sustainability with Green Genie™
 armstrongceilings.com/greengenie

VISUAL SELECTION

PERFORMANCE SELECTION Dots represent high level of performance.

\$\$\$



armstrongceilings.com/suspdwgs	Susp. Dwg.	Item No.	Dimensions (Inches)	UL Classified Acoustics		Total Acoustics ¹	Articulation Class	Fire Performance	Light Reflect	Anti-Mold/Mildew	Sag Resistant	Certified Low VOC Emissions	CleanAssure™ Disinfectable Panels					DURABILITY					Recycle Program	30-Yr Warranty				
				NRC	+ CAC =								Fog	Wash	Impact	Scratch	Soil	Wash	Impact	Scratch	Soil							
OPTIMA® 9/16" Square Tegular	26, 43, 47, 51, 55	1410	4 x 48 x 1"	N/A	N/A	N/A	N/A	Class A	0.88	.	.	N/A		
		1411	4 x 60 x 1"	N/A	N/A	N/A	N/A	Class A	0.88	.	.	N/A		
		1413	6 x 12 x 1"	N/A	N/A	N/A	N/A	Class A	0.88	.	.	N/A	
		1415	6 x 42 x 1"	N/A	N/A	N/A	N/A	Class A	0.88	.	.	N/A	
		1403	6 x 48 x 1"	N/A	N/A	N/A	N/A	Class A	0.88	.	.	N/A	
		1417	6 x 54 x 1"	N/A	N/A	N/A	N/A	Class A	0.88	.	.	N/A
		1407	6 x 60 x 1"	N/A	N/A	N/A	N/A	Class A	0.88	.	.	N/A
		1409	6 x 96 x 1"	N/A	N/A	N/A	N/A	Class A	0.88	.	.	N/A
		3263	12 x 24 x 1"	0.95	N/A	N/A	190	Class A	0.88	.	.	N/A
		3290	12 x 48 x 1"	0.95	N/A	N/A	190	Class A	0.88	.	.	N/A
1414	12 x 96 x 1"	0.95	N/A	N/A	190	Class A	0.88	.	.	N/A		

¹ Total Acoustics® ceiling panels have an ideal combination of sound absorption and sound blocking in one product. Optima® items with the PB suffix are included in the Sustain® portfolio and carry Declare® certification.

FIBERGLASS – Standard

OPTIMA®
OPTIMA® PB
with Plant-based Binder
Tegular
fine texture

SUSTAIN®
High Performance
Sustainable Ceiling Systems
(PB Suffix Only)

Declare.
(PB Suffix Only)

GREENGUARD
Gold Certified
(details below)

LEED® WELL™ LBC

UP TO **71%** RECYCLED CONTENT

energy management
construction waste mgmt
regional materials
design for flexibility
EPD
recyclable/producer resp.
biobased materials
recycled content
sourcing of raw materials
material ingredient reporting
low emitting materials
lighting quality
acoustics

LOCATION DEPENDENT PB ONLY PB ONLY PB ONLY

Calculate sustainability with Green Genie™
armstrongceilings.com/greengenie

VISUAL SELECTION

armstrongceilings.com/suspdwgs	Susp. Dwg.	Item No.	Dimensions (Inches)
OPTIMA® 9/16" Square Tegular		3276	20 x 54 x 1"
		3266	20 x 56 x 1"
		3277	20 x 60 x 1"
		3279	21 x 24 x 1"
		3251 3251PB	24 x 24 x 1"
		3254	24 x 24 x 1-1/2"


PERFORMANCE SELECTION Dots represent high level of performance.

UL Classified Acoustics	Total Acoustics ¹	Articulation Class	Fire Performance	Light Reflect	Anti-Mold/Mildew	Sag Resistant	Certified Low VOC Emissions	Bio-Block	Humi-Guard+	CleanAssure™ Disinfectable Panels	DURABILITY	Recycle Program	30-Yr Warranty			
NRC + CAC =	AC	Class	Class	Light Reflect	Anti-Mold/Mildew	Sag Resistant	Certified Low VOC Emissions	Bio-Block	Humi-Guard+	Fog	Wash	Impact	Scratch	Soil	Recycle Program	30-Yr Warranty
0.95 *	N/A	N/A	N/A	Class A	0.88 *	*	*	N/A	*	*	*	*	*	*	*	*
0.95 *	N/A	N/A	N/A	Class A	0.88 *	*	*	N/A	*	*	*	*	*	*	*	*
0.95 *	N/A	N/A	190	Class A	0.88 *	*	*	N/A	*	*	*	*	*	*	*	*
0.95 *	N/A	N/A	190	Class A	0.88 *	*	*	N/A	*	*	*	*	*	*	*	*
0.95 *	N/A	N/A	190	Class A	0.88 *	*	*	N/A	*	*	*	*	*	*	*	*
1.00 *	N/A	N/A	190	Class A	0.88 *	*	*	N/A	*	*	*	*	*	*	*	*

MORE ITEMS ▶

¹ Total Acoustics® ceiling panels have an ideal combination of sound absorption and sound blocking in one product. Optima® items with the PB suffix are included in the Sustain® portfolio and carry Declare® certification.

SUSPENSION SYSTEMS



Blizzard White – Suspension System Finish
A color and texture coordinated suspension system to complement Optima® ceiling panels for a monolithic look and feel. Available for: Prelude® XL® and XL® HRC, Suprafine ML, XL, and XL HRC, Silhouette® XL® 1/4" and 1/8" Reveal, Interlude® XL® HRC

ACCESSORIES (must be ordered separately)

435 Stabilizer Clip (3/4" & 1")
Recommended for panels 60" and greater in length
NOTE: Panels 60" up to 96" – One clip near mid-point of each long edge.
Panels 96" and over – Two clips at 1/3 points of each long edge.

PHYSICAL DATA

Material
3355 – Fiberglass with DuraBrite® acoustically transparent membrane; CAC backing
All other items – Fiberglass with DuraBrite acoustically transparent membrane

Surface Finish
DuraBrite scrim with factory-applied latex paint

Fire Performance
Class A: ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index of 25 or less. Smoke Developed Index of 50 or less (UL labeled).

ASTM E1264 Classification
Type XII, Form 2, Pattern E
Fire Class A

Humidity/Sag Resistance
HumiGuard® Plus ceiling panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

Anti-Mold/Mildew
Ceiling tiles with BioBlock® performance resist the growth of mold and mildew on the tile surface.

VOC Emissions (PB suffix items only)
GREENGUARD Gold Certified
This product has been UL validated to be Formaldehyde-Free. UL.COM/ECV.
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard™, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

Primary (Embodied) Energy
See all LCA information on our EPDs.

High Recycled Content
Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC.

Insulation Value
3254 – R Factor – 6.0 (BTU units)
R Factor – 1.05 (Watts units)

Cleaning and Disinfecting
Cleaning and CDC recommended disinfecting options available on armstrongceilings.com/cleaning

PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS
UL.COM/GG
UL 2818



30-Year Performance Guarantee & Warranty
When installed with Armstrong® Suspension System. Details at armstrongceilings.com/warranty

Weight; Square Feet/Carton
1403 – 0.55 lbs/SF; 24 SF/ctn
1407 – 0.55 lbs/SF; 30 SF/ctn
1409 – 0.55 lbs/SF; 96 SF/ctn
1410 – 0.55 lbs/SF; 16 SF/ctn
1411 – 0.55 lbs/SF; 20 SF/ctn
1413 – 0.55 lbs/SF; 6 SF/ctn
1414, 3263, 3290 – 0.55 lbs/SF; 48 SF/ctn
1415 – 0.55 lbs/SF; 21 SF/ctn
3251 – 0.46 lbs/SF; 48 SF/ctn
1417 – 0.55 lbs/SF; 27 SF/ctn
1418 – 0.55 lbs/SF; 6 SF/ctn
3254 – 0.64 lbs/SF; 32.5 SF/ctn
3276 – 0.55 lbs/SF; 75 SF/ctn
3277 – 0.55 lbs/SF; 100 SF/ctn
3266 – 0.55 lbs/SF; 62.22 SF/ctn
3279 – 0.45 lbs/SF; 42 SF/ctn

Minimum Order Quantity
1 carton

Metric Items Available
3251M, 3254M, 3256M, 3257M, 3355M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.

OPTIMA®
OPTIMA® PB
 with Plant-based Binder
 Tegular
 fine texture



Declare.
 (PB Suffix Only) **GREENGUARD**
 Gold Certified

LEED® WELL™ LBC
 UP TO **71% RECYCLED CONTENT**
 energy management construction waste mgmt regional materials design for flexibility EPD recyclable/extended producer resp. biobased materials recycled content sourcing of raw materials material ingredient reporting low emitting materials lighting quality acoustics

Calculate sustainability with Green Genie™
 armstrongceilings.com/greengenie

LOCATION DEPENDENT PB ONLY

PB ONLY PB ONLY

VISUAL SELECTION

armstrongceilings.com/suspdwgs	Susp. Dwg.	Item No.	Dimensions (Inches)
OPTIMA® 9/16" Square Tegular	26, 43, 47, 51, 55	3355	24 x 24 x 1" □
		3280	24 x 42 x 1" □
		3257 3257PB	24 x 48 x 1" □
		3265 3265PB	24 x 60 x 1" □
		3261 3261PB	24 x 72 x 1" □
		3262 3262PB	24 x 96 x 1" □
		3283	27 x 30 x 1" □
		3268	28 x 30 x 1" □
		3269	28 x 60 x 1" □
		3259	30 x 30 x 1" □
		3284	30 x 54 x 1" □
		3289	30 x 56 x 1" □
		3285	30 x 60 x 1" □
		3287	42 x 48 x 1" □
		3288	44 x 48 x 1" □
		3256 3256PB	48 x 48 x 1" □
3249	48 x 54 x 1" □		

PERFORMANCE SELECTION Dots represent high level of performance.

\$\$\$

UL Classified Acoustics	Total Acoustics ¹	Articulation Class	Fire Performance	Light Reflect	Anti-Mold/Mildew	Sag Resistant	Certified Low VOC Emissions	CleanAssure™ Disinfectable Panels	DURABILITY					Recycle Program
NRC + CAC =	AC	Class	Class	Class	Class	Class	Class	Fog	Wash	Impact	Scratch	Soil	30-Yr Warranty	
0.90 26	N/A	190	Class A	0.88	.	.	N/A	N/A	.
0.95	N/A	190	Class A	0.88	.	.	N/A
0.95	N/A	190	Class A	0.88	.	.	N/A
0.95	N/A	190	Class A	0.88	.	.	N/A
0.95	N/A	190	Class A	0.88	.	.	N/A
0.95	N/A	190	Class A	0.88	.	.	N/A
0.95*	N/A	190*	Class A	0.88	.	.	N/A
0.95	N/A	190	Class A	0.88	.	.	N/A
0.95	N/A	190	Class A	0.88	.	.	N/A
0.95	N/A	190	Class A	0.88	.	.	N/A
0.95	N/A	190	Class A	0.88	.	.	N/A
0.95	N/A	190	Class A	0.88	.	.	N/A
0.95	N/A	190	Class A	0.88	.	.	N/A
0.95	N/A	190	Class A	0.88	.	.	N/A

¹ Total Acoustics® ceiling panels have an ideal combination of sound absorption and sound blocking in one product. Optima® items with the PB suffix are included in the Sustain® portfolio and carry Declare® certification. * These items are not UL classified.



FIBERGLASS – Standard

OPTIMA®
OPTIMA® PB
with Plant-based Binder
Tegular
fine texture

SUSTAIN®
High Performance
Sustainable Ceiling Systems
(PB Suffix Only)

Declare®
(PB Suffix Only)

GREENGUARD
Gold Certified
(details below)

LEED® WELL™ LBC

UP TO **71% RECYCLED CONTENT**

energy management
construction waste mgmt
regional materials
design for flexibility
EPD
recyclable/excise producer resp.
biobased materials
recycled content
sourcing of raw materials
material ingredient reporting
low emitting materials
lighting quality
acoustics

LOCATION DEPENDENT PB ONLY PB ONLY PB ONLY

Calculate sustainability with Green Genie™
armstrongceilings.com/greengenie


VISUAL SELECTION

PERFORMANCE SELECTION Dots represent high level of performance.

armstrongceilings.com/suspdwgs	Item No.	Dimensions (Inches)		UL Classified Acoustics NRC + CAC =	Total Acoustics ¹	Articulation Class	Fire Performance	Light Reflect	Anti-Mold/Mildew	Sag Resistant	Certified Low VOC Emissions	CleanAssure™ Disinfectable Panels	DURABILITY					Recycle Program	30-Yr Warranty
		Width	Length										Fog	Wash	Impact	Scratch	Soil		
Non-PB 1" Thick – 15/16" & 9/16" Square Tegular																			
Made-to-Order Sizes OPTIMA®		4" – 6"	9" – 96"	N/A	N/A	N/A	N/A	Class 0.88	•	•	N/A	•	•	•	•	•			
		6-1/2" – 48"	9" – 120"					A	•										
PB 1" Thick – 15/16" & 9/16" Square Tegular																			
Made-to-Order Sizes OPTIMA®		4" – 6"	9" – 72"	N/A	N/A	N/A	N/A	Class 0.88	•	•	N/A	•	•	•	•	•			
		6-1/2" – 24"	9" – 96"					A	•										
		24-1/2" – 28"	9" – 72"																
		28-1/2" – 48"	9" – 48"																
Non-PB 1-1/2" Thick – 15/16" & 9/16" Square Tegular																			
		4" – 6"	9" – 96"	N/A	N/A	N/A	N/A	Class 0.88	•	•	N/A	•	•	•	•	•			
		6-1/2" – 48"	9" – 120"					A	•										

¹ Total Acoustics® ceiling panels have an ideal combination of sound absorption and sound blocking in one product. Optima® items with the PB suffix are included in the Sustain® portfolio and carry Declare® certification.

SUSPENSION SYSTEMS



Blizzard White – Suspension System Finish

A color and texture coordinated suspension system to complement Optima® ceiling panels for a monolithic look and feel. Available for: Prelude® XL® and XL® HRC, Suprafine ML, XL, and XL HRC, Silhouette® XL® 1/4" and 1/8" Reveal, Interlude® XL® HRC

ACCESSORIES (must be ordered separately)

435 Stabilizer Clip (3/4" & 1")
Recommended for panels 60" and greater in length
NOTE: Panels 60" up to 96" – One clip near mid-point of each long edge.
Panels 96" and over – Two clips at 1/3 points of each long edge.

PHYSICAL DATA

Material
3355 – Fiberglass with DuraBrite® acoustically transparent membrane; CAC backing
All other items – Fiberglass with DuraBrite acoustically transparent membrane

Surface Finish
DuraBrite scrim with factory-applied latex paint

Fire Performance
Clas A: ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index of 25 or less. Smoke Developed Index of 50 or less (UL labeled).

ASTM E1264 Classification
Type XII, Form 2, Pattern E
Fire Class A

Humidity/Sag Resistance
HumiGuard® Plus ceiling panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

Anti-Mold/Mildew
Ceiling tiles with BioBlock® performance resist the growth of mold and mildew on the tile surface.

VOC Emissions
(PB suffix items only)
GREENGUARD Gold Certified
This product has been UL validated to be Formaldehyde-Free.
UL.COM/ECV.
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard™, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

Primary (Embodied) Energy
See all LCA information on our EPDs.

High Recycled Content
Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC.

Insulation Value
3254 – R Factor – 6.0 (BTU units)
R Factor – 1.05 (Watts units)

Cleaning and Disinfecting
Cleaning and CDC recommended disinfecting options available on armstrongceilings.com/cleaning



30-Year Performance Guarantee & Warranty
When installed with Armstrong® Suspension System. Details at armstrongceilings.com/warranty

Weight: Square Feet/Carton
3283 – 0.55 lbs/SF; 57.5 SF/ctn
3249, 3256, 3256PB, 3257, 3257PB, 3262, 3262PB – 0.55 lbs/SF; 96 SF/ctn
3259 – 0.64 lbs/SF; 75 SF/ctn
3261, 3261PB – 0.55 lbs/SF; 72 SF/ctn
3265, 3265PB, 3285 – 0.55 lbs/SF; 100 SF/ctn
3268 – 0.55 lbs/SF; 70 SF/ctn
3269 – 0.55 lbs/SF; 93.33 SF/ctn
3284 – 0.55 lbs/SF; 90 SF/ctn
3287 – 0.55 lbs/SF; 112 SF/ctn
3288 – 0.55 lbs/SF; 117.33 SF/ctn
3355 – 0.47 lbs/SF; 48 SF/ctn
3289 – 0.40 lbs/SF; 93.33 SF/ctn
3280 – 0.55 lbs/SF; 84 SF/ctn

Minimum Order Quantity
1 carton

Metric Items Available
3251M, 3254M, 3256M, 3257M, 3355M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.