

# PRELUDE® Concealed Suspension System



Prelude® Concealed suspension system

Sophisticated slotted suspension system with a narrow 1/4" reveal.

## KEY SELECTION ATTRIBUTES

- **PeakForm®** profile increases strength and stability for improved performance during installation
- **CleanAssure™** family of products – includes disinfectable panels, suspension systems, and trim (Cleaning and CDC approved disinfecting options available on [armstrongceilings.com/cleaning](http://armstrongceilings.com/cleaning))
- **SuperLock™** main beam clip is engineered for a strong, secure connection and fast, accurate alignment confirmed with an audible click; easy to remove/relocate
- Hot-dipped galvanized coating inhibits red rust better than electrogalvanized or painted systems
- 10-year limited warranty; 30-year limited warranty with **HumiGuard® Plus** products

- Main beams and cross tees can be ordered with special sizing and rout spacing for your project needs
- Rotary-stitched during manufacture for additional torsional strength and extra stability during installation
- Upward access angles for limited plenum access; use DAC for downward access

## COLORS

White (WH)	Unpainted
7301	7446 7445
7300	7426 7425
ML7343	7447 7870
XL7342	7427 7428
ML7323	7486 7418
XL7328	7436 7437
7835	
7830	
7449I	
DAC	

## VISUAL SELECTION

	Item No.	Description	Dimensions (Inches)	HANGER SPACING* LBS/LF	
				4 Ft.	5 Ft.
PRELUDE® Concealed 15/16"	7301	12' HD Main Beam	144 × 15/16 × 1-11/16"	16.50	8.73
	7300	12' ID Main Beam	144 × 15/16 × 1-11/16"	12.80	6.35
	ML7343	4' Cross Tee	48 × 15/16 × 1-1/2"	9.00	N/A
	XL7342	4' Cross Tee	48 × 15/16 × 1-1/2"	9.00	N/A
	ML7323	2' Cross Tee	24 × 15/16 × 1-1/2"	38.63	N/A
	XL7328	2' Cross Tee	24 × 15/16 × 1-3/8"	38.63	N/A
PRELUDE Concealed 3/4"	7446	4' Tee Spline	48 × 3/4 × 7/8"	N/A	N/A
	7436	3' Tee Spline	36 × 3/4 × 7/8"	N/A	N/A
	7426	2' Tee Spline	24 × 3/4 × 7/8"	N/A	N/A
PRELUDE Concealed 7/16"	7449RI	4' Single Leaf Tee – Right	48 × 7/16 × 1-1/4"	N/A	N/A
	7447	4' Concealed Angle	48 × 7/16 × 1-1/4"	N/A	N/A
	7437	3' Concealed Angle	36 × 7/16 × 1-1/4"	N/A	N/A
	7427	2' Concealed Angle	24 × 7/16 × 1-1/4"	N/A	N/A
Suggested Molding (Additional molding options available. Visit <a href="http://armstrongceilings.com/moldings">armstrongceilings.com/moldings</a> )	7835	10' Channel Molding (7/8")	120 × 7/8 × 1-3/4 × 9/16"	N/A	N/A
	7830	10' Channel Molding (7/16")	120 × 15/16 × 1-15/16 × 15/16"	N/A	N/A

\* Simple Span

## PERFORMANCE

Fire Guard™	Seismic Category	CleanAssure™ Disinfectable Grid	Fog	Spray	Wipe
N/A	*	*	*	*	*
N/A	*	*	*	*	*
N/A	*	*	*	*	*
N/A	*	*	*	*	*
N/A	N/A	*	*	*	*
N/A	N/A	*	*	*	*
N/A	N/A	*	*	*	*
N/A	N/A	*	*	*	*
N/A	N/A	*	*	*	*
N/A	N/A	*	*	*	*
N/A	N/A	*	*	*	*
N/A	N/A	*	*	*	*
N/A	N/A	*	*	*	*

Dots represent high level of performance.

## PACKAGING

Pieces/ Carton	LF/ Carton
20	240
20	240
60	240
60	240
60	120
60	120
125	500
125	375
125	250
75	300
75	300
100	300
150	300
20	200
16	160

ASTM Class  
HD - Heavy-duty  
ID - Intermediate-duty  
LD - Light-duty

# PRELUDE® Concealed Suspension System



LEED® WELL™ LBC

UP TO 25% RECYCLED CONTENT

energy management  
construction waste mgmt  
regional materials  
design for flexibility  
EPD  
recyclable/ biobased materials  
recycled content  
sourcing of raw materials  
material ingredient reporting  
low emitting/ materials  
lighting quality  
acoustics

Calculate sustainability with Ecomedes  
armstrongceilings.com/ecomedes

LOCATION DEPENDENT

MAXIMUM FIXTURE WEIGHT Drawing Key: Main beam (↑) Cross tee (---) Hanger wire (+)

Configuration	Item No.	Fixture			Planning Module			Hanger Spacing			Maximum Weight		
		A	B	C	A	B	C	A	B	C	A	B	C
Main Beam to Main Beam	7300 7301	24" x 48"	12" x 48"	24" x 48"	48" x 48"	48" x 48"	48" x 48"	48"	48"	48"	54.26 lbs.	42.17 lbs.	49.27 lbs.
Cross Tee to Cross Tee	ML7343 XL7342	24" x 48"			48" x 48"†			48"			51.0 lbs	40.89 lbs.	

Main beams tested as follows: 7300 tested at 13.0 lbs./LF to 1/360 of 4' span; 7301 tested at 16.5 lbs./LF to 1/360 of 4' span; 8500 tested at 13.3 lbs./lin. ft. to 1/360 of 4' span. 48" cross tee tested at 10.34 lbs./lin. ft. to 1/360 of 4' span.

Fixtures weighing more than 56 lbs. should be independently supported. Fixture weight is based on single fixture only. For end-to-end fixtures or other configurations not shown, consult your Armstrong Ceilings representative.

NOTE: The above data is based on 48" hanger wire spacing, board weight of 1 lb./SF, maximum deflection of tees not to exceed 1/360 of the span, and suspension system installed in accordance with ASTM C636.

## ACCESSORIES

Description	Description
Tee Spline: Spans distance between main beams or cross tees to support tile. Ribbed flange to minimize lipping	Border Clip: Installs between ceiling tiles and perimeter closures.
7426 24", 7/8" web, 3/4" flange	7870
7436 36", 7/8" web, 3/4" flange	Breather Spline: Prevents breathing in tiles installed without main beams, cross tees, splines, access members. Ribbed to minimize tile lipping.
7446 48", 7/8" web, 3/4" flange	7486
Other Aluminum	Other
Concealed Angle: Use with access hook to support tile.	Single Leaf Tee: Use with Access Hook 7418
7427 24", 1-1/4", 7/16"	7449-LE 48", 1-1/4", 7/16", left
7437 36", 1-1/4", 7/16"	7449-RI 48", 1-1/4", 7/16", right
7447 48", 1-1/4", 7/16"	Other
Other	DAC Downward Access Clip
Access Hook: Supports tile, provides upward access to plenum.	
7418 12"	
7428 24"	
Other Aluminum	
Stabilizer Bar: Aligns main beams 24" and 48" O.C.	
7425 24"	
7445 48", center notched	
Other Aluminum	


## SEISMIC PERFORMANCE

Main Beams 7300, 7301	Minimum Lbs. To Pull Out Compression/Tension Exceeds 300 lbs. in compression/tension
Minimum Lbs. To Pull Out Compression/Tension 255.0	ICC Reports For areas under ICC jurisdiction, see ICC evaluation report number 1308 for allowable values and/or conditions of use concerning the suspension system components listed on this page. The report is subject to reexamination, revisions and possible cancellation.
Cross Tees XL7342, XL7328, ML7343, ML7323	

## PHYSICAL DATA

Material Hot-dipped galvanized steel)	Design Considerations All acoustical grid and Axiom trim accessories (a.k.a. clips) are supplied as unpainted items. Exposed clips will need to be field painted after installation, if required for the project. This ensures accessories meet the tested performance criteria and adhere to AWI installation instructions and warranted products or systems.
Surface Finish Cross Tee/Main Beam: Baked polyester paint Concealed Components: Unpainted steel	Cleaning and Disinfecting Cleaning and CDC recommended disinfecting options available on armstrongceilings.com/cleaning
Manufactured and tested in accordance with ASTM C635	Duty Classification Intermediate or Heavy-duty Main Beam Load Test Data
End Detail for 1-1/2" Main Beam: 7300, 7301 – Staked-on clip XL Cross Tees: Staked-on clip ML Cross Tees: Staked-on hook	

## DETAILS

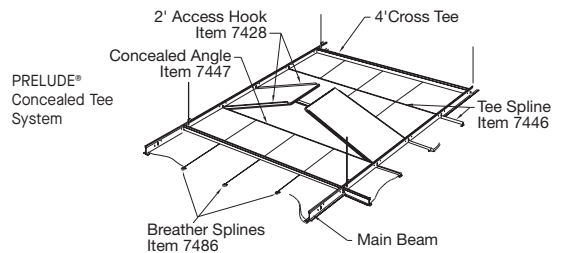

## MAIN BEAM LOAD TEST DATA

Main Beams	Length	Web Height	ASTM Class	HANGER SPACING (LBS./LF. SIMPLE SPAN)	
				4'	5'
7300	144"	1-11/16"	Intermediate-duty	12.8	6.9
7301	144"	1-11/16"	Heavy-duty	16.7	9.0
Cross Tee Load Test Data					
ML7323	24"	1-1/2"	N/A	38.63	N/A
ML7343	48"	1-1/2"	N/A	9.00	N/A
XL7328	24"	1-3/8"	N/A	40.45	N/A
XL7342	48"	1-1/2"	N/A	9.00	N/A