

TRANSITION MOLDINGS

Acoustical-to-Drywall Transition Molding

*A FrameAll®
Drywall Grid Solution*



Acoustical-to-Drywall Transition Molding

Transition moldings save time and money and are easier to install.

KEY SELECTION ATTRIBUTES

- Fewer parts and pieces; combines acoustical molding with drywall taping flange
- Pre-punched vertical web to improve screw attachment
- Knurled and slotted integral taping flange on items 7901, 7902, 7904, 7905, 7906, 7907, and 7908 accommodates taping and finishing
- Protective film on the face of the wall molding flange of 7904PF and 7905PF facilitates faster, easier mudding, sanding, and taping
- Compatible with all types of framing including FrameAll® Drywall Grid and ShortSpan® framing
- **new** 7915 with 7/8" acoustical flange for seismic applications

VISUAL SELECTION

	Item No.	Flange	Length	Reveal	Pcs/Ctn.	LF/Ctn.	
Shadow Reveal Transition Molding	7901	9/16"	120"	3/8"	12	120	
	7902	15/16"	120"	3/8"	12	120	
	7911	9/16"	120"	3/8" x 1/4"	12	120	
	7912	15/16"	120"	3/8" x 1/4"	12	120	
Flush Transition Molding	7903	9/16"	120"	1"	12	120	
	7904 7904PF*	15/16"	120"	N/A	12	120	
	7905 7905PF*	9/16"	120"	N/A	12	120	

TRANSITION MOLDINGS

Acoustical-to-Drywall Transition Molding

LEED® WELL | LBC

UP TO 61% RECYCLED CONTENT

energy management

construction waste mgmt

regional materials

design for flexibility

EPD

recyclable/producer resp.

biobased materials

recycled content

sourcing of raw materials

material ingredient reporting

low emitting materials

lighting quality

acoustics

Calculate sustainability with Ecomedes

armstrongceilings.com/ecomedes

LOCATION DEPENDENT

Well Building Standard™ (WELL) Living Building Challenge® (LBC)

VISUAL SELECTION


	Item No.	Flange	Length	Transition Height	Pcs/Ctn	LF/Ctn.	
F Vertical Transition Molding	7906	1/2"	120"	N/A	12	120	
	7913	9/16"	120"	N/A	12	120	
	7914	15/16"	120"	N/A	12	120	
	7915	7/8"	120"	N/A	12	120	
	7907	9/16"	120"	15/16"	12	120	
Tegular Transition Molding	7908	15/16"	120"	15/16"	12	120	
	7909	15/16"	120"	1"	12	120	
Step Transition Molding	7910	9/16"	120"	1"	12	120	

* Protective film applied to face of wall molding flange for easier finishing.

ACCESSORIES


2" Beam End Retaining Clip – Joins main beam or cross tee to wall molding and web of suspension system with no visible pop rivets.

ALBERC2 (aluminum) – 200 pcs
FZALBERC2 (aluminum) – 50 pcs
BERC2 (steel) – 200 pcs
FZBERC2 (steel) – 50 pcs



Knurled Angle Molding – Hemmed with prefinished exposed flanges.

KAM10 – 10 pcs
KAM12 – 10 pcs



TRANSITION MOLDINGS

Acoustical-to-Drywall Transition Molding

LEED® WELL | LBC

UP TO 61% RECYCLED CONTENT

energy management

construction waste mgmt

regional materials

design for flexibility

EPD

recyclable/extended producer resp.

biobased materials

recycled content

sourcing of raw materials

material ingredient reporting

low emitting materials

lighting quality

acoustics

Calculate sustainability with Ecomedes

armstrongceilings.com/ecomedes

LOCATION DEPENDENT


Well Building Standard® (WELL)

Living Building Challenge® (LBC)


INSTALLATION DETAILS

Drywall to Acoustical (Acoustical Flange with 3/8" reveal) 7901 – 9/16" and 7902 – 15/16"



Flush

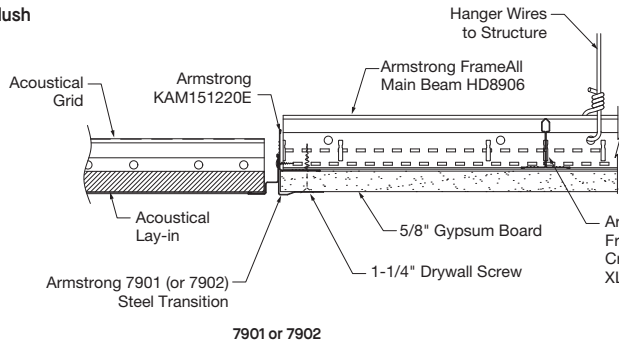

Tegular

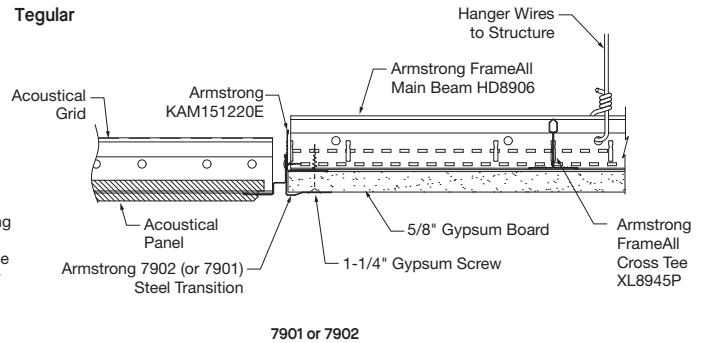


Drywall to Acoustical 1" Step 7909 – 15/16" and 7910 – 9/16"

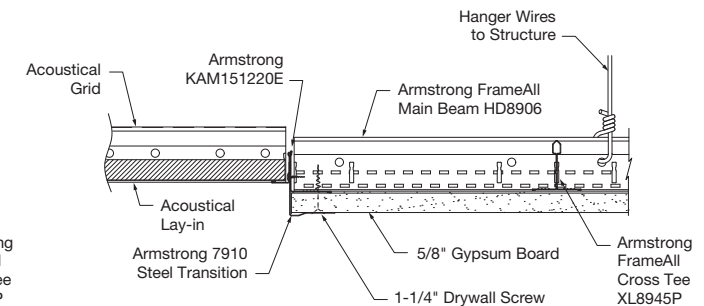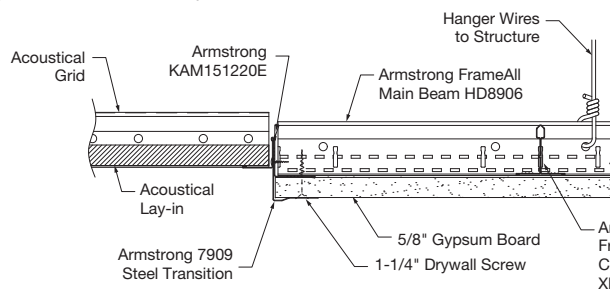


Drywall to Acoustical (1" Inverted T) 7903



Flush

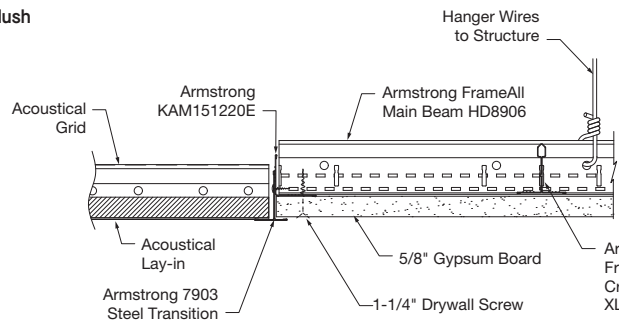

Tegular

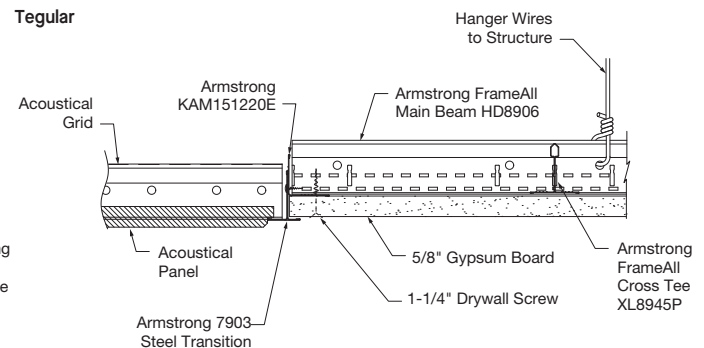

Drywall to Acoustical Flush Transition 7904/7904PF – 15/16" and 7905/7905PF – 9/16"

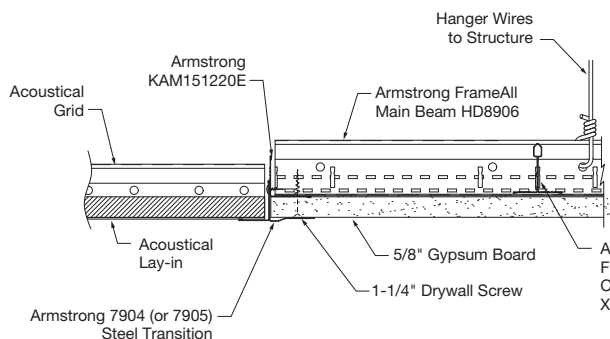

Items 7904PF and 7905PF feature protective film applied to the face of the wall molding flange for faster, easier finishing.

TRANSITION MOLDINGS

Acoustical-to-Drywall Transition Molding

LEED® WELL LBC

UP TO 61% RECYCLED CONTENT

energy management

construction waste mgmt

regional materials

design for flexibility

EPD

recyclable/ biobased materials

recycled content

sourcing of raw materials

material ingredient reporting

low emitting/ materials

lighting quality

acoustics

Calculate sustainability with Ecomedes


armstrongceilings.com/ecomedes

LOCATION DEPENDENT


Well Building Standard™ (WELL) Living Building Challenge® (LBC)

INSTALLATION DETAILS (CONTINUED)


F Vertical Transition Molding Flush 7906

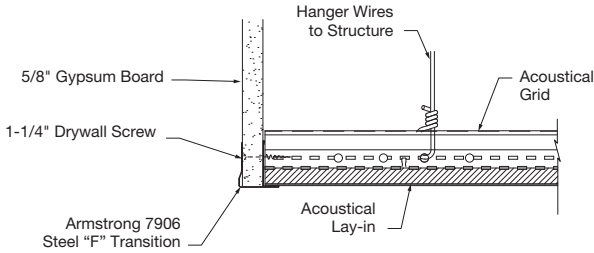



F Vertical Transition Molding Flush 7915

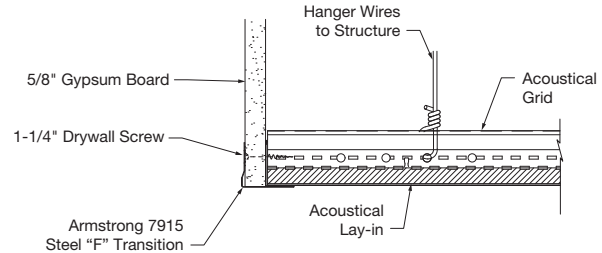

Drywall-to-Acoustical Tegular 7907 - 9/16" and 7908 - 15/16"

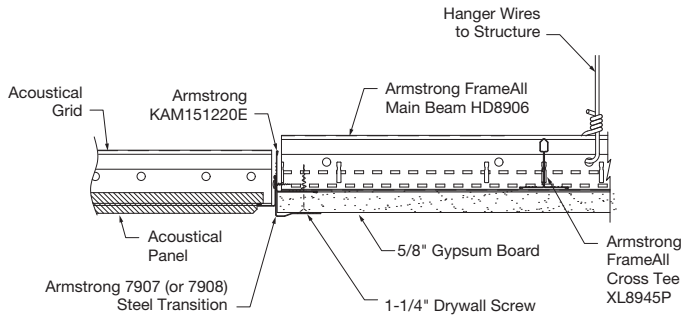

Drywall to Acoustical (Acoustical Flange with 3/8" x 1/4" reveal) 7911 - 9/16" and 7912 - 15/16"

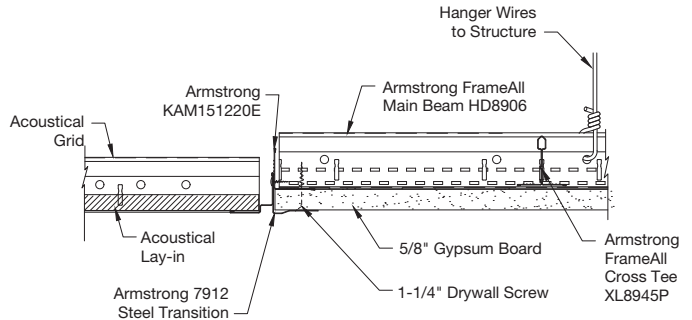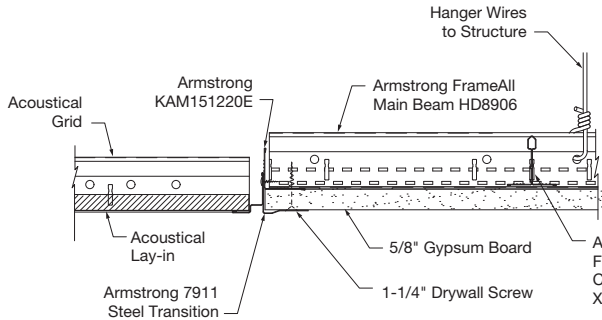

Stepped 7913 - 9/16" and 7914 - 15/16"

