



ACOUSTICAL ON-CENTER LINEAR LIGHTING

LAYOUT GUIDE

Armstrong®
World Industries

SYMMETRY IS BEAUTIFUL

Until now, incorporating on-center linear lighting into your ceiling layouts has been a challenge.

Now, Armstrong® can help you deliver your vision of a perfectly symmetrical, perfectly finished ceiling featuring on-center continuous or non-continuous linear lighting using factory-finished ceiling panels and suspension systems.

On-center continuous
and non-continuous
linear lighting layouts
are easy to customize

armstrongceilings.com/linearlighing

- ESR-2311: ICC-ES Evaluation Report
- ESR-1289: ICC-ES Evaluation Report
- ES-0163: IAPMO seismic compliant with 2012 IBC
- Department of State Architect – DSA PA105
- City of LA – RR 5348
- 26 UL Fire Resistant Designs
- Meets ASTM C635, C841, C926, C636, C754, C840, and C842
- Meets ASTM C645 requirement for minimum metal thickness to .0179" for screw pullout


For more information, call 877 276-7876



ACOUSTICAL ON-CENTER LINEAR LIGHTING




ON CENTER LINEAR LIGHTING LAYOUT GUIDE

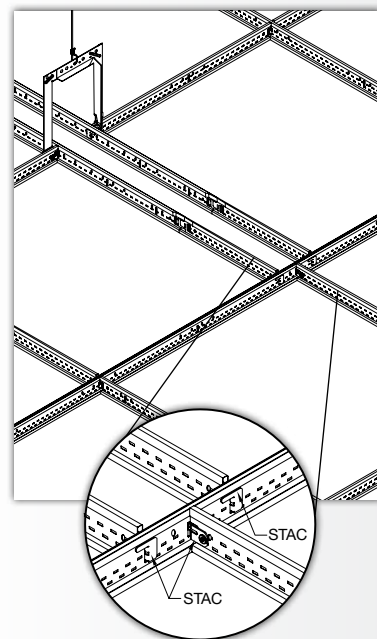


On-center Linear

Using a combination of Made-to-Order ceiling panels and suspension systems, perfect lighting layouts like this are easy to specify and install.

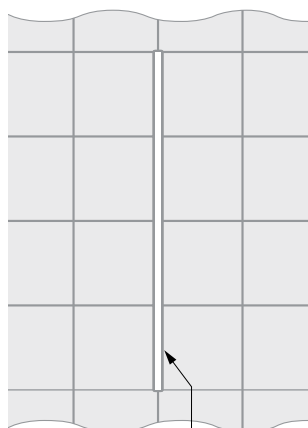

Opening for on-center
linear light fixture
placement

CONTINUOUS

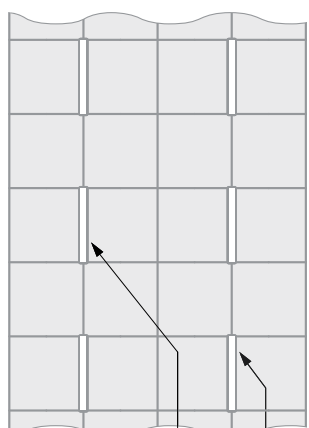

Opening for on-center
linear light fixture
placement


NON-CONTINUOUS

For more information, call 877 276-7876

ON-CENTER LINEAR LIGHTING

DESIGN YOUR LAYOUT

Select from one of our standard layouts or create your own configuration

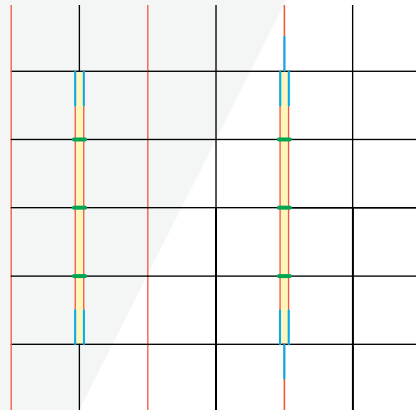

KEY:

- Main Beams
- Cross Tees
- Grid Adapter
- Lighting Connector Bracket or TechZone® Ceiling Systems Yoke
- Lights (suggested location)

CHOOSE YOUR FIELD PANELS, SUSPENSION SYSTEM, AND ACCESSORIES

MADE-TO-ORDER – CEILING PANELS AND SUSPENSION SYSTEMS

Made-to-Order ceiling panels are available to ship in 3 weeks with a one carton minimum and are perfect for designs where building modules are not standard, or if you'll be using narrow linear fixtures or diffusers. Now you can have crisp, clean panels and suspension system throughout your project.


- Popular textures, including Lyra®, Optima®, Calla®, and Ultima® (details below)
- Size capabilities by product:
 1. Lyra
 - 4"-11-1/2" wide and 6"-72" long
 - 12"-48" wide and 4"-96" long
 2. Calla
 - 4"-24-1/2" wide and 4"-72" long
 - 25"-35-1/2" wide and 4"-30" long
 - 36"-48" wide and 4"-24" long

3. Optima
 - 4"-11-1/2" wide and 6"-96" long
 - 12"-48" wide and 4"-120" long
4. Ultima
 - 4"-24-1/2" wide and 4"-72" long
 - 25"-48" wide and 4"-30" long
5. Suspension Systems
 - 36"-144" for main beams
 - 6"-144" for cross tees

*See data pages for more details

LYRA®, CALLA®

- Smooth drywall-like ceiling visual
- Outstanding acoustical performance
 - 0.95 NRC Lyra, 0.85 NRC Calla
- Part of the Sustain® portfolio

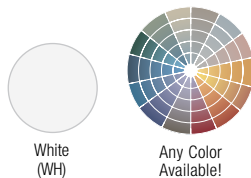

OPTIMA®, ULTIMA®

- Non-directional DuraBrite® surface for:
 - Excellent durability
 - Superior light reflectance to enhance daylighting and save energy
- Outstanding acoustical performance:
 - 0.90+ NRC Optima, 0.75 NRC Ultima

- Part of the Sustain® portfolio

ALL LYRA, OPTIMA, CALLA, AND ULTIMA PANELS ARE:



Class A
Fire Rated



Anti-
microbial



Washable



Scrubbable



Impact-
resistant







Soil-
resistant

Item No.	Description	Dimensions (Inches)	Edge Profile	UL Classified Acoustics			Total Acoustics ¹	AC	Light Reflect	Sag Resistance	Recycling Program	Recycled Content
					+							
Square Tegular Panels												
 8361PB	Lyra®	24 × 24 × 1"		0.95	N/A	—	190	0.88	HumiGuard® Plus	Yes	Up to 71%	
 3251	Optima®	24 × 24 × 1"		0.95	N/A	—	190	0.90	HumiGuard Plus	Yes	Up to 71%	
 2824	Calla®	24 × 24 × 1"		0.85	35	BEST 	170	0.86	HumiGuard Plus	Yes	77%	
Beveled Tegular Panels												
 1912	Ultima®	24 × 24 × 3/4"		0.75	35	BETTER 	N/A	0.90	HumiGuard Plus	Yes	Up to 84%	

¹ Total Acoustics® ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product. **GOOD** (NRC 0.60-0.65; CAC 35+) **BETTER** (NRC 0.70-0.75; CAC 35+) **BEST** (NRC 0.80+; CAC 35+)

CHOOSE YOUR SUSPENSION SYSTEM

BELOW IS A SELECTION OF 9/16" MAIN BEAMS, CROSS TEES, AND MAIN BEAM TO CROSS TEE ADAPTERS CREATED TO SIMPLIFY COMMON ON-CENTER LIGHTING LAYOUTS



Item No.	Description	Roof Spacing	Notching
Silhouette XL 1/8" Reveal 9/16" Slotted Tee Suspension System			
☐ 761238 _ _	12' HD Main Beam – Notched 24" O.C. one side	12" O.C.	
☐ 761228 _ _	10' HD Main Beam – Notched 24" O.C. one side	12" O.C.	
☐ 761218 _ _	8' HD Main Beam – Notched 24" O.C. one side	12" O.C.	
☐ 761208 _ _	6' HD Main Beam – Notched 24" O.C. one side	12" O.C.	
☐ 760238 _ _	12' ID Main Beam – Notched 24" O.C. one side	12" O.C.	
☐ 760228 _ _	10' ID Main Beam – Notched 24" O.C. one side	12" O.C.	
☐ 760218 _ _	8' ID Main Beam – Notched 24" O.C. one side	12" O.C.	
☐ 760208 _ _	6' ID Main Beam – Notched 24" O.C. one side	12" O.C.	

Cross Tees

☐ XL76898 _ _	8' Cross Tee – Notched both sides at 24", 72", notched one side at 46", 50", and on opposite side at 48"	–	
☐ XL76498 _ _	4' Cross Tee – Notched one side only at 22", 26" and on opposite side at 24"	–	
☐ XL76478 _ _	46" Cross Tee – Notched both sides at 22"	–	
☐ XL76448 _ _	44" Cross Tee – Center notched, both sides	–	
☐ XL76288 _ _	28" Cross Tee – Unnotched	–	
☐ XL76228 _ _	22" Cross Tee – Unnotched	–	

Grid Adapter

☐ GA76998 _ _	1' Grid Adapter	–	
---	-----------------	---	--

Silhouette XL 1/4" Reveal 9/16" Slotted Tee Suspension System

☐ 76123 _ _	12' HD Main Beam – Notched 24" O.C. one side	12" O.C.	
☐ 76122 _ _	10' HD Main Beam – Notched 24" O.C. one side	12" O.C.	
☐ 76121 _ _	8' HD Main Beam – Notched 24" O.C. one side	12" O.C.	
☐ 76120 _ _	6' HD Main Beam – Notched 24" O.C. one side	12" O.C.	
☐ 76023 _ _	12' ID Main Beam – Notched 24" O.C. one side	12" O.C.	
☐ 76022 _ _	10' ID Main Beam – Notched 24" O.C. one side	12" O.C.	
☐ 76021 _ _	8' ID Main Beam – Notched 24" O.C. one side	12" O.C.	
☐ 76124 _ _	6' ID Main Beam – Notched 24" O.C. one side	12" O.C.	

Cross Tees

☐ XL7689 _ _	8' Cross Tee – Notched both sides at 24", 72", notched one side at 46", 50", and on opposite side at 48"	–	
☐ XL7649 _ _	4' Cross Tee – Notched one side only at 22", 26" and on opposite side at 24"	–	
☐ XL7647 _ _	46" Cross Tee – Notched both sides at 22"	–	
☐ XL7644 _ _	44" Cross Tee – Center notched, both sides	–	
☐ XL7628 _ _	28" Cross Tee – Unnotched	–	
☐ XL7622 _ _	22" Cross Tee – Unnotched	–	

Grid Adapter

☐ GA7699 _ _	1' Grid Adapter	–	
--	-----------------	---	--

Item No.	Description	Roof Spacing
Interlude XL HRC 9/16" Suspension System		
☐ 6126HRC _ _	10' HD Main Beam	6" O.C.
☐ 6125HRC _ _	8' HD Main Beam	6" O.C.
☐ 6124HRC _ _	6' HD Main Beam	6" O.C.
☐ 61026HRC _ _	10' ID Main Beam	6" O.C.
☐ 61025HRC _ _	8' ID Main Beam	6" O.C.
☐ 61024HRC _ _	6' ID Main Beam	6" O.C.

Cross Tees

☐ XL6189HRC _ _	8' Cross Tee	24", 46", 48", 50", 72"
☐ XL6149HRC _ _	4' Cross Tee	22", 24", 26"
☐ XL6147HRC _ _	46" Cross Tee	22"
☐ XL6144HRC _ _	44" Cross Tee	22"
☐ XL6128HRC _ _	28" Cross Tee	–
☐ XL6122HRC _ _	22" Cross Tee	–

Grid Adapter

☐ GA6199HRC _ _	9" and 15" Grid Adapters	–
---	--------------------------	---

Suprafine XL 9/16" Suspension System

☐ 7526 _ _	10' HD Main Beam	6" O.C.
☐ 7525 _ _	8' HD Main Beam	6" O.C.
☐ 7524 _ _	6' HD Main Beam	6" O.C.
☐ 75026 _ _	10' ID Main Beam	6" O.C.
☐ 75025 _ _	8' ID Main Beam	6" O.C.
☐ 75024 _ _	6' ID Main Beam	6" O.C.

Cross Tees

☐ XL7589 _ _	8' Cross Tee	24", 46", 48", 50", 72"
☐ XL7543 _ _	4' Cross Tee	22", 24", 26"
☐ XL7547 _ _	46" Cross Tee	22"
☐ XL7544 _ _	44" Cross Tee	22"
☐ XL7522 _ _	22" Cross Tee	–

Grid Adapter

☐ GA7599 _ _	9" and 15" Grid Adapters	–
--	--------------------------	---

Accessories

☐ LCB4	4" Lighting Connector Bracker	–
☐ TZYK	TechZone® Ceiling Systems Continuous Lighting Yoke (for 4" to 6" wide light fixtures)	–
☐ STAC	Single Tee Adapter Clip	–


ON-CENTER LINEAR LIGHTING

CLIPS AND ACCESSORIES FOR LIGHTING

LINEAR LIGHTING INTEGRATION – CLIPS AND ACCESSORIES




- The Zero Plenum Lighting Connector Bracket (LCB4) helps maintain the 4" wide suspension system opening, ensuring the BASO™ or Axis Click fixture fits properly and securely into the ceiling opening.
- The LCB4 installs like a small cross tee, stabbing through the rout holes in the two perpendicular main beams and aligning with the two parallel cross tees.

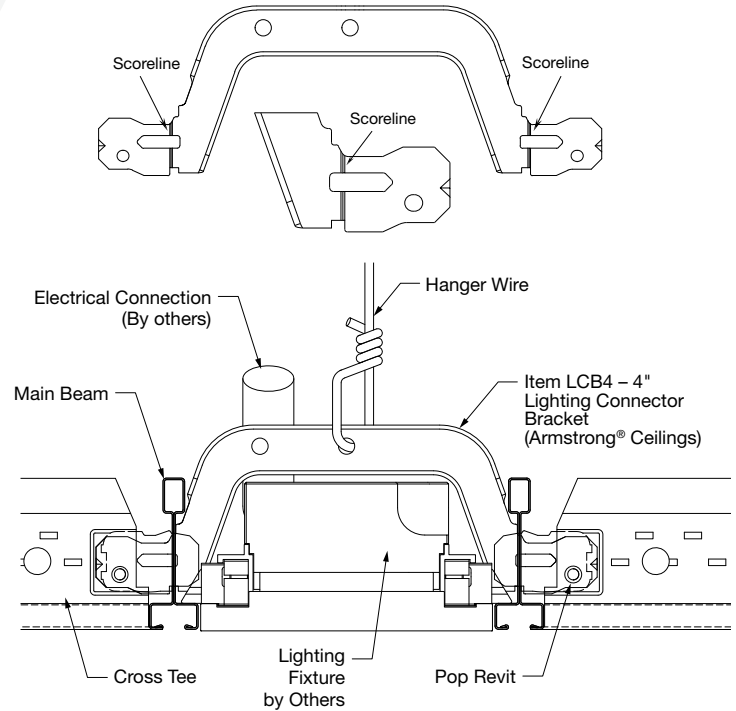

BASO
axis

TECHZONE® CEILING SYSTEMS YOKE (TZYK)


- Create a sleek ceiling design with uninterrupted ribbons of light
- Alternate continuous lights and diffusers with other services for a monolithic, uncluttered visual
- Easy installation
- Seismic tested
- Ability to use with 4" and 6" configurations

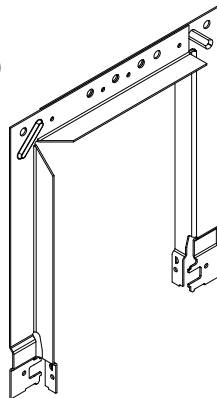

NOTE: 2 pieces per yoke assembly



TECHZONE CEILING SYSTEMS BRACING CLIP (TZBC)

Use to connect cross tees to the main beam of the continuous technical zone when no yoke is present.

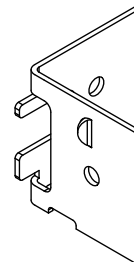

STAC CLIP

Allows you to create strong, code compliant, non-seismic and seismic D, E, F main beam-to-cross tee connections.

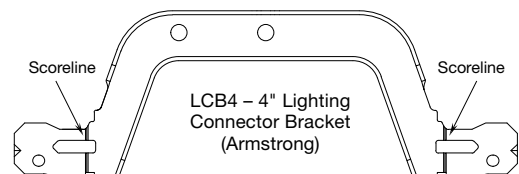




ON-CENTER LINEAR LIGHTING

CONTINUOUS LIGHT FIXTURE LAYOUT – 6' ON-CENTER

8' LINEAR LIGHTS WITH 9/16" SUSPENSION SYSTEM AND CEILING PANELS

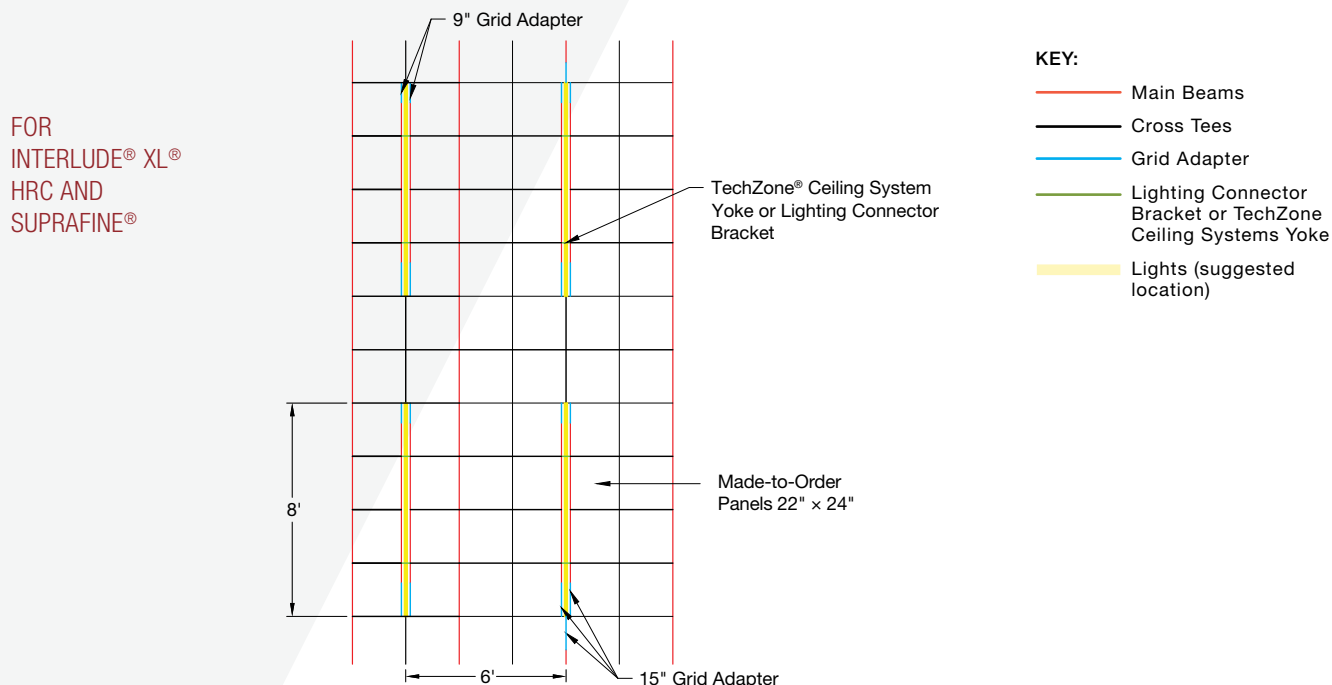

		 UL Classified Acoustics		Total Acoustics¹	Light Reflect	Sag Resistance	Recycling Program	Recycled Content	
Item No.	Description		+		=				
Ceiling Panels*									
☐ 1912	Ultima® 24" × 24" Beveled Tegalur	0.75		35	BETTER 	0.90	HumiGuard® Plus	Yes	Up to 84%
☐	1 CTN MIN Made-to-Order Sizes or Colors (2 Wks) Ultima 22" × 24"	N/A		N/A	—	0.90	HumiGuard Plus	Yes	Up to 84%
NOTE: Up to 6 Weeks for Color & Size Combinations									

* For other ceiling panel options, refer to page 4.

¹ Total Acoustics® ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product. **GOOD** (NRC 0.60-0.65; CAC 35+) **BETTER** (NRC 0.70-0.75; CAC 35+) **BEST** (NRC 0.80+; CAC 35+)


Description	Interlude® XL® HRC	Suprafine®
Main Beams		
12' HD Main Beam Routs 6" O.C.	☐ 6101HRC	☐ 7501
6' HD Main Beam Routs 6" O.C.	☐ 6124HRC	☐ 7524
Cross Tees		
8' Cross Tee Routs at 24", 46", 48", 50", 72"	☐ XL6189HRC	☐ XL7589
4' Cross Tee Routs at 22", 24", 26"	☐ XL6149HRC	☐ XL7543
46" Cross Tee Routs at 22"	☐ XL6147HRC	☐ XL7547
22" Cross Tee	☐ XL6122HRC	☐ XL7522
Grid Adapter (9" and 15")	☐ GA6199HRC	☐ GA7599

Item No.	Description
Accessories	
☐ LCB4	4" Lighting Connector Bracket
☐ TZYK	TechZone® Ceiling Systems Continuous Lighting Yoke (for 4" to 6" wide light fixtures)
☐ STAC	Single Tee Adapter Clip

CONTINUOUS LIGHT FIXTURE LAYOUT – 6' ON-CENTER

8' LINEAR LIGHTS WITH 9/16" SUSPENSION SYSTEM AND CEILING PANELS

FOR
SILHOUETTE®
1/4" AND 1/8"
REVEAL

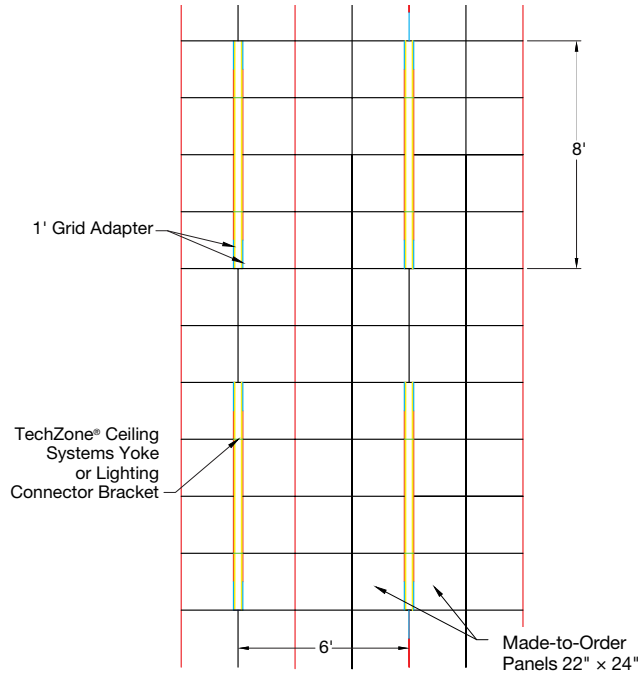

KEY:

- Main Beams
- Cross Tees
- Grid Adapter
- Lighting Connector Bracket or TechZone Ceiling Systems Yoke
- Lights (suggested location)

Item No.	Description	UL Classified Acoustics		Total Acoustics¹	Light Reflect	Sag Resistance	Recycling Program	Recycled Content
		NRC	CAC					
Ceiling Panels*								
☐ 1912	Ultima® 24" × 24" Beveled Tegalur	0.75	35	BETTER	0.90	HumiGuard® Plus	Yes	Up to 84%
☐ 1 CTN MIN Made-to-Order Sizes or Colors (2 Wks)	Ultima 22" × 24"	N/A	N/A	—	0.90	HumiGuard Plus	Yes	Up to 84%
NOTE: Up to 6 Weeks for Color & Size Combinations								

* For other ceiling panel options, refer to page 4.

¹ Total Acoustics® ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product. **GOOD** (NRC 0.60-0.65; CAC 35+) **BETTER** (NRC 0.70-0.75; CAC 35+) **BEST** (NRC 0.80+; CAC 35+)


Description	Silhouette® 1/4"	Silhouette 1/8"	Silhouette Notes
Main Beams			
12' HD Main Beam Routs 6" O.C.	☐ 76123	☐ 761238	Routs 12" O.C., Single Notch 24" O.C.
6' HD Main Beam Routs 6" O.C.	☐ 76120	☐ 761208	Routs 12" O.C., Single Notch 24" O.C.
Cross Tees			
8' Cross Tee Routs at 24", 46", 48", 50", 72"	☐ XL7689	☐ XL76898	Routs 12" O.C., Double Notch at 24", 72", notched one side at 46", 50", and on opposite side at 48"
4' Cross Tee Routs at 22", 24", 26"	☐ XL7649	☐ XL76498	Notched one side only at 22", 26", and on opposite side at 24"
46" Cross Tee Routs at 22"	☐ XL7647	☐ XL76478	Double Notch at 22"
22" Cross Tee	☐ XL7622	☐ XL76228	Unnotched
Grid Adapter (1')	☐ GA7699	☐ GA76998	Unnotched

Item No.	Description
Accessories	
☐ LCB4	4" Lighting Connector Bracket
☐ TZYK	TechZone® Ceiling Systems Continuous Lighting Yoke (for 4" to 6" wide light fixtures)
☐ STAC	Single Tee Adapter Clip

ON-CENTER LINEAR LIGHTING

CONTINUOUS LIGHT FIXTURE LAYOUT – 8' ON-CENTER

18' LINEAR LIGHTS WITH 9/16" SUSPENSION SYSTEM AND CEILING PANELS

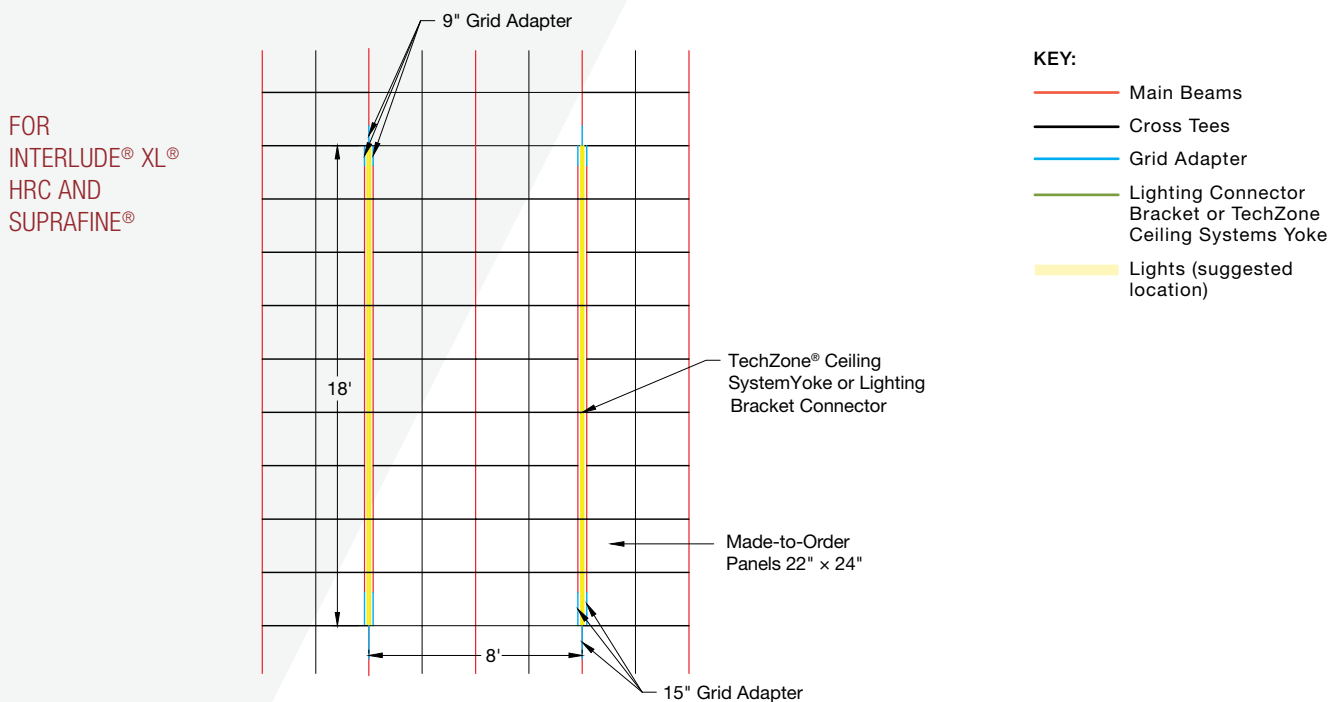

UL Classified Acoustics								
Item No.	Description	NRC	+	CAC	=	NRC	CAC	
Ceiling Panels*								
☐ 1912	Ultima® 24" × 24" Beveled Tegalur	0.75		35	BETTER	0.90	HumiGuard® Plus	Yes
☐	Made-to-Order Sizes or Colors (2 Wks)	N/A		N/A	–	0.90	HumiGuard Plus	Yes
NOTE: Up to 6 Weeks for Color & Size Combinations								

* For other ceiling panel options, refer to page 4.

¹ Total Acoustics® ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product. **GOOD** (NRC 0.60-0.65; CAC 35+) **BETTER** (NRC 0.70-0.75; CAC 35+) **BEST** (NRC 0.80+; CAC 35+)


Description	Interlude® XL® HRC	Suprafine®
Main Beams		
12' HD Main Beam Routs 6" O.C.	☐ 6101HRC	☐ 7501
8' HD Main Beam Routs 6" O.C.	☐ 6125HRC	☐ 7525
Cross Tees		
8' Cross Tee Routs at 24", 46", 48", 50", 72"	☐ XL6189HRC	☐ XL7589
46" Cross Tee Routs at 22"	☐ XL6147HRC	☐ XL7547
24" Cross Tee	☐ XL6120HRC	☐ XL7520
Grid Adapter (9" and 15")	☐ GA6199HRC	☐ GA7599

Item No.	Description
Accessories	
☐ LCB4	4" Lighting Connector Bracket
☐ TZYK	TechZone® Ceiling Systems Continuous Lighting Yoke (for 4" to 6" wide light fixtures)
☐ STAC	Single Tee Adapter Clip

CONTINUOUS LIGHT FIXTURE LAYOUT – 8' ON-CENTER

18' LINEAR LIGHTS WITH 9/16" SUSPENSION SYSTEM AND CEILING PANELS

FOR
SILHOUETTE®
1/4" AND 1/8"
REVEAL

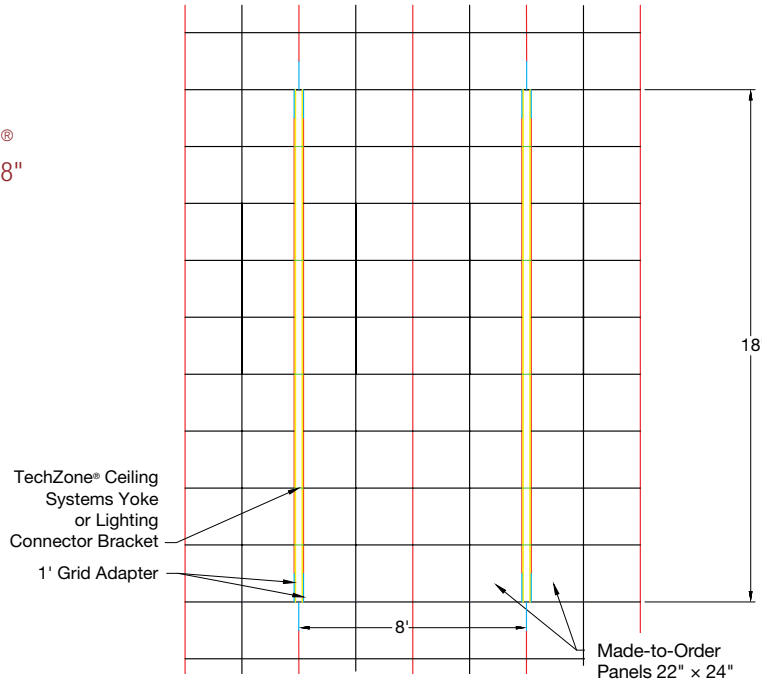

KEY:

- Main Beams
- Cross Tees
- Grid Adapter
- Lighting Connector Bracket or TechZone Ceiling Systems Yoke
- Lights (suggested location)

		UL Classified Acoustics		Total Acoustics¹	Light Reflect	Sag Resistance	Recycling Program	Recycled Content		
Item No.	Description	NRC	+	CAC	=	NRC CAC	Light Reflect	Sag Resistance	Recycling Program	Recycled Content
Ceiling Panels*										
☐ 1912	Ultima® 24" × 24" Beveled Tegalur	0.75	35	BETTER		0.90	HumiGuard® Plus	Yes	Up to 84%	
☐	1 CTN MIN Made-to-Order Sizes or Colors (2 Wks)	Ultima 22" × 24"	N/A	N/A	—	0.90	HumiGuard Plus	Yes	Up to 84%	
NOTE: Up to 6 Weeks for Color & Size Combinations										

* For other ceiling panel options, refer to page 4.

¹ Total Acoustics® ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product. **GOOD** (NRC 0.60-0.65; CAC 35+) **BETTER** (NRC 0.70-0.75; CAC 35+) **BEST** (NRC 0.80+; CAC 35+)


Description	Silhouette® 1/4"	Silhouette 1/8"	Silhouette Notes
Main Beams			
12' HD Main Beam Routs 6" O.C.	☐ 76123	☐ 761238	Routs 12" O.C., Single Notch 24" O.C.
8' HD Main Beam Routs 6" O.C.	☐ 76121	☐ 761218	Routs 12" O.C., Single Notch 24" O.C.
Cross Tees			
8' Cross Tee Routs at 24", 46", 48", 50", 72"	☐ XL7689	☐ XL76898	Routs 12" O.C., Double Notch at 24", 72", notched one side at 46", 50", and on opposite side at 48"
46" Cross Tee Routs at 22"	☐ XL7647	☐ XL76478	Double Notch at 22"
24" Cross Tee	☐ XL7620	☐ XL76208	Unnotched
Grid Adapter (1')	☐ GA7699	☐ GA76998	Unnotched

Item No.	Description
Accessories	
☐ LCB4	4" Lighting Connector Bracket
☐ TZYK	TechZone® Ceiling Systems Continuous Lighting Yoke (for 4" to 6" wide light fixtures)
☐ STAC	Single Tee Adapter Clip

ON-CENTER LINEAR LIGHTING

CONTINUOUS LIGHT FIXTURE LAYOUT – 10' ON-CENTER

16' LINEAR LIGHTS WITH 9/16" SUSPENSION SYSTEM AND CEILING PANELS

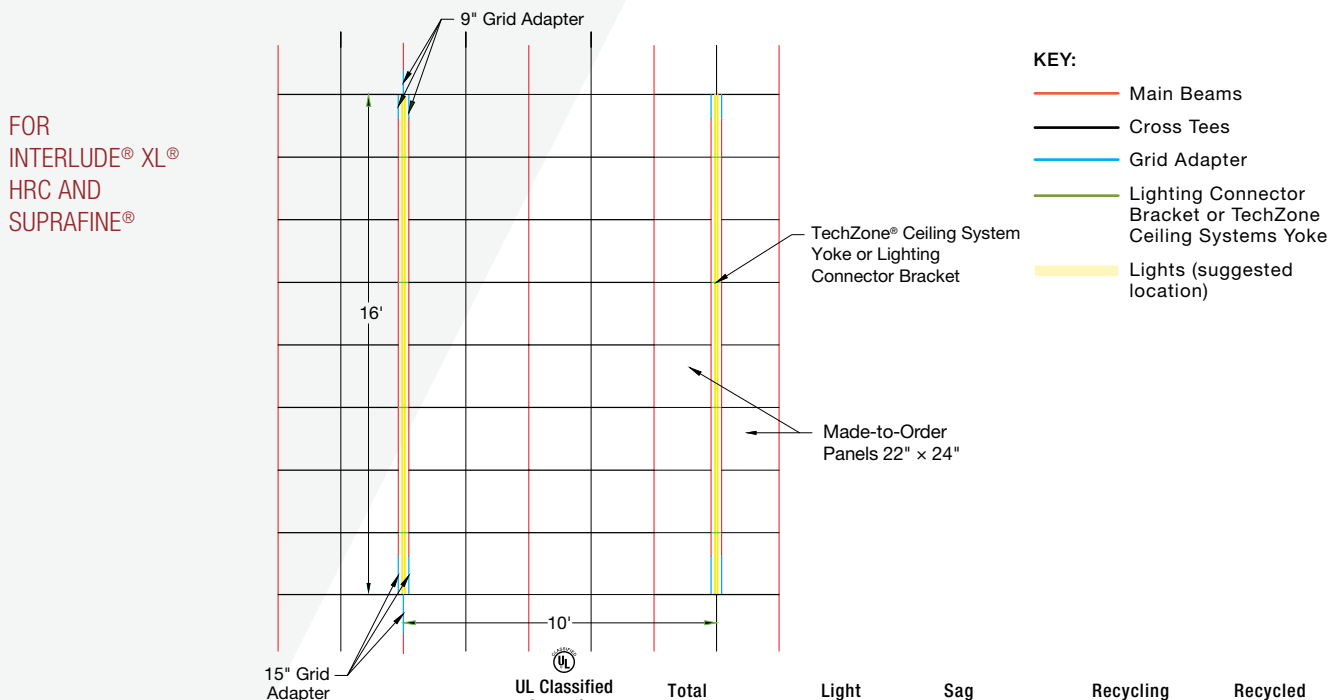

		UL Classified Acoustics		Total Acoustics ¹	Light Reflect	Sag Resistance	Recycling Program	Recycled Content		
Item No.	Description		+		=					
Ceiling Panels*										
☐ 1912	Ultima® 24" × 24" Beveled Tegalur	0.75		35		BETTER 	0.90	HumiGuard® Plus	Yes	Up to 84%
☐	Made-to-Order Sizes or Colors (2 Wks)	N/A		N/A		—	0.90	HumiGuard Plus	Yes	Up to 84%
		NOTE: Up to 6 Weeks for Color & Size Combinations								

* For other ceiling panel options, refer to page 4.

¹ Total Acoustics® ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product. **GOOD** (NRC 0.60-0.65; CAC 35+) **BETTER** (NRC 0.70-0.75; CAC 35+) **BEST** (NRC 0.80+; CAC 35+)


Description	Interlude® XL® HRC	Suprafine®
Main Beams		
12' HD Main Beam Routs 6" O.C.	☐ 6101HRC	☐ 7501
8' HD Main Beam Routs 6" O.C.	☐ 6125HRC	☐ 7525
6' HD Main Beam Routs 6" O.C.	☐ 6124HRC	☐ 7524
Cross Tees		
8' Cross Tee Routs at 24", 46", 48", 50", 72"	☐ XL6189HRC	☐ XL7589
4' Cross Tee Routs at 22", 24", 26"	☐ XL6149HRC	☐ XL7543
46" Cross Tee Routs at 22"	☐ XL6147HRC	☐ XL7547
24" Cross Tee	☐ XL6120HRC	☐ XL7520
22" Cross Tee	☐ XL6122HRC	☐ XL7522
Grid Adapter (9" and 15")	☐ GA6199HRC	☐ GA7599

Item No.	Description
Accessories	
☐ LCB4	4" Lighting Connector Bracket
☐ TZYK	TechZone® Ceiling Systems Continuous Lighting Yoke (for 4" to 6" wide light fixtures)
☐ STAC	Single Tee Adapter Clip

CONTINUOUS LIGHT FIXTURE LAYOUT – 10' ON-CENTER

16' LINEAR LIGHTS WITH 9/16" SUSPENSION SYSTEM AND CEILING PANELS

FOR
SILHOUETTE®
1/4" AND 1/8"
REVEAL

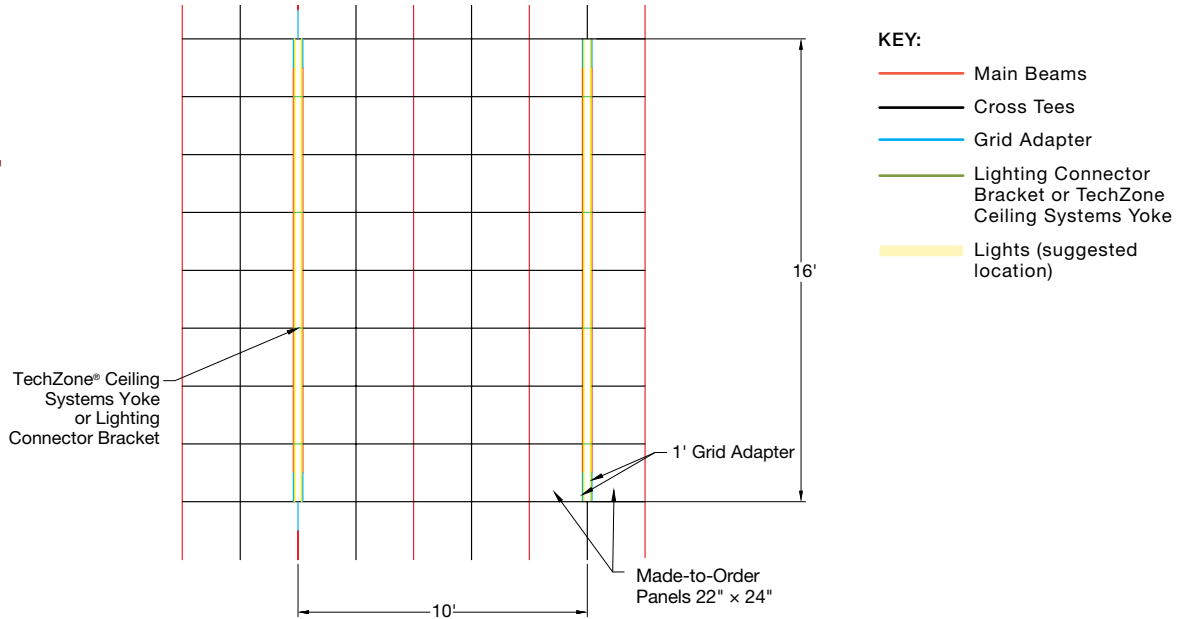

KEY:

- Main Beams
- Cross Tees
- Grid Adapter
- Lighting Connector Bracket or TechZone Ceiling Systems Yoke
- Lights (suggested location)

Item No.	Description	UL Classified Acoustics		Total Acoustics ¹	Light Reflect	Sag Resistance	Recycling Program	Recycled Content
		NRC	CAC					
Ceiling Panels*								
☐ 1912	Ultima® 24" × 24" Beveled Tegalur	0.75	35	BETTER	0.90	HumiGuard® Plus	Yes	Up to 84%
☐	1 CTN MIN Made-to-Order Sizes or Colors (2 Wks)	N/A	N/A	—	0.90	HumiGuard Plus	Yes	Up to 84%
	NOTE: Up to 6 Weeks for Color & Size Combinations							

* For other ceiling panel options, refer to page 4.


¹ Total Acoustics® ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product. **GOOD** (NRC 0.60-0.65; CAC 35+) **BETTER** (NRC 0.70-0.75; CAC 35+) **BEST** (NRC 0.80+; CAC 35+)

Description	Silhouette® 1/4"	Silhouette 1/8"	Silhouette Notes
Main Beams			
12' HD Main Beam Routs 6" O.C.	☐ 76123	☐ 761238	Routs 12" O.C., Single notch 24" O.C.
8' HD Main Beam Routs 6" O.C.	☐ 76121	☐ 761218	Routs 12" O.C., Single notch 24" O.C.
6' HD Main Beam Routs 6" O.C.	☐ 76120	☐ 761208	Routs 12" O.C., Single notch 24" O.C.
Cross Tees			
8' Cross Tee Routs at 24", 46", 48", 50", 72"	☐ XL7689	☐ XL76898	Routs 12" O.C., Double Notch at 24", 72", notched one side at 46", 50" and on opposite side at 48"
4' Cross Tee Routs at 22", 24", 26"	☐ XL7649	☐ XL76498	Notched one side only at 22", 26" and on opposite side at 24"
46" Cross Tee Routs at 22"	☐ XL7647	☐ XL76478	Double Notch at 22"
24" Cross Tee	☐ XL7620	☐ XL76208	Unnotched
22" Cross Tee	☐ XL7622	☐ XL76228	Unnotched
Grid Adapter (1')	☐ GA7699	☐ GA76998	Unnotched
Accessories			
☐ LCB4	4" Lighting Connector Bracket		
☐ TZYK	TechZone® Ceiling Systems Continuous Lighting Yoke (for 4" to 6" wide light fixtures)		
☐ STAC	Single Tee Adapter Clip		

ON-CENTER LINEAR LIGHTING

DISCONTINUOUS LIGHT FIXTURE LAYOUT – 6' ON-CENTER

4' LINEAR LIGHTS WITH 9/16" SUSPENSION SYSTEM AND CEILING PANELS

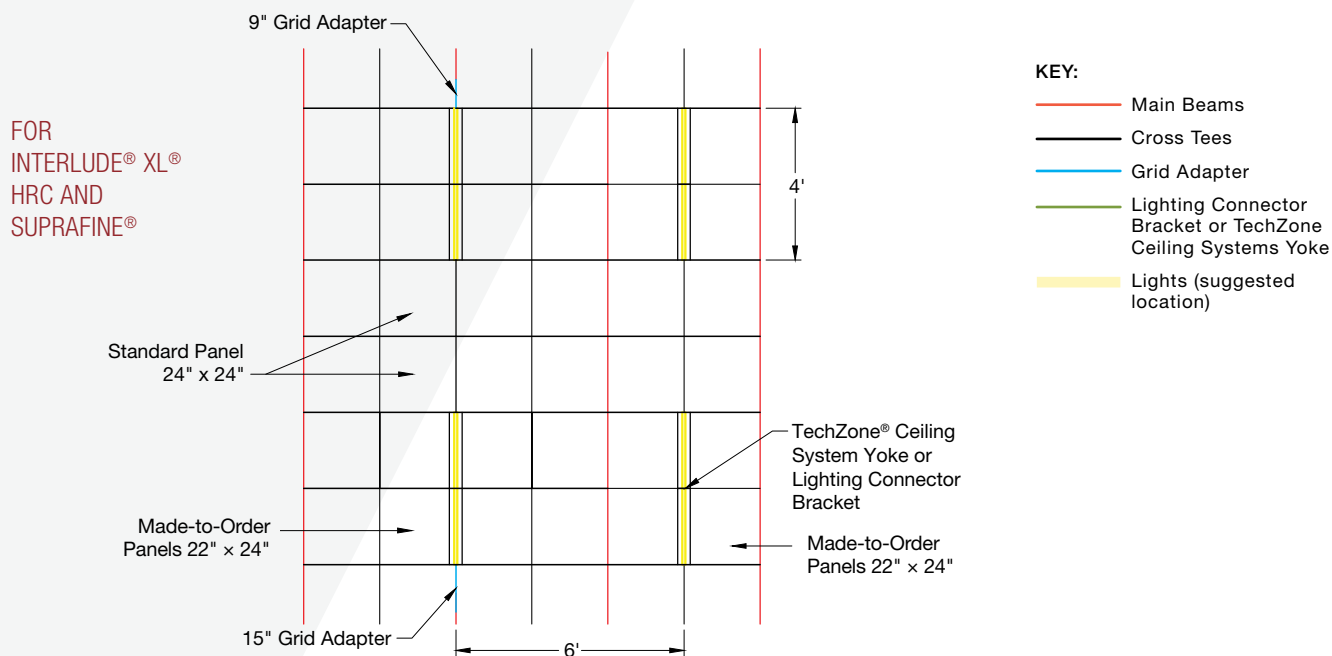

Item No.	Description	UL Classified Acoustics			Total Acoustics ¹	Light Reflect	Sag Resistance	Recycling Program	Recycled Content
		NRC	+	CAC					
Ceiling Panels*									
☐ 1912	Ultima® 24" × 24" Beveled Tegalur	0.75		35	BETTER	0.90	HumiGuard® Plus	Yes	Up to 84%
☐	Made-to-Order Sizes or Colors (2 Wks)	N/A		N/A	—	0.90	HumiGuard Plus	Yes	Up to 84%
NOTE: Up to 6 Weeks for Color & Size Combinations									

* For other ceiling panel options, refer to page 4.


¹ Total Acoustics® ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product. **GOOD** (NRC 0.60-0.65; CAC 35+) **BETTER** (NRC 0.70-0.75; CAC 35+) **BEST** (NRC 0.80+; CAC 35+)

Description	Interlude®	Suprafine®
Main Beams		
12' HD Main Beam Routs 6" O.C.	☐ 6101HRC	☐ 7501
Cross Tees		
8' Cross Tee Routs at 24", 46", 48", 50", 72"	☐ XL6189HRC	☐ XL7589
4' Cross Tee Routs at 22", 24", 26"	☐ XL6149HRC	☐ XL7543
48" Cross Tee Routs at 24"	☐ XL6140HRC	☐ XL7540
46" Cross Tee Routs at 22"	☐ XL6147HRC	☐ XL7547
24" Cross Tee	☐ XL6120HRC	☐ XL7520
22" Cross Tee	☐ XL6122HRC	☐ XL7522
Grid Adapter	☐ GA6199HRC	☐ GA7599

Item No.	Description
Accessories	
☐ LCB4	4" Lighting Connector Bracket
☐ TZYK	TechZone® Ceiling Systems Continuous Lighting Yoke (for 4" to 6" wide light fixtures)
☐ STAC	Single Tee Adapter Clip

DISCONTINUOUS LIGHT FIXTURE LAYOUT – 6' ON-CENTER

4' LINEAR LIGHTS WITH 9/16" SUSPENSION SYSTEM AND CEILING PANELS

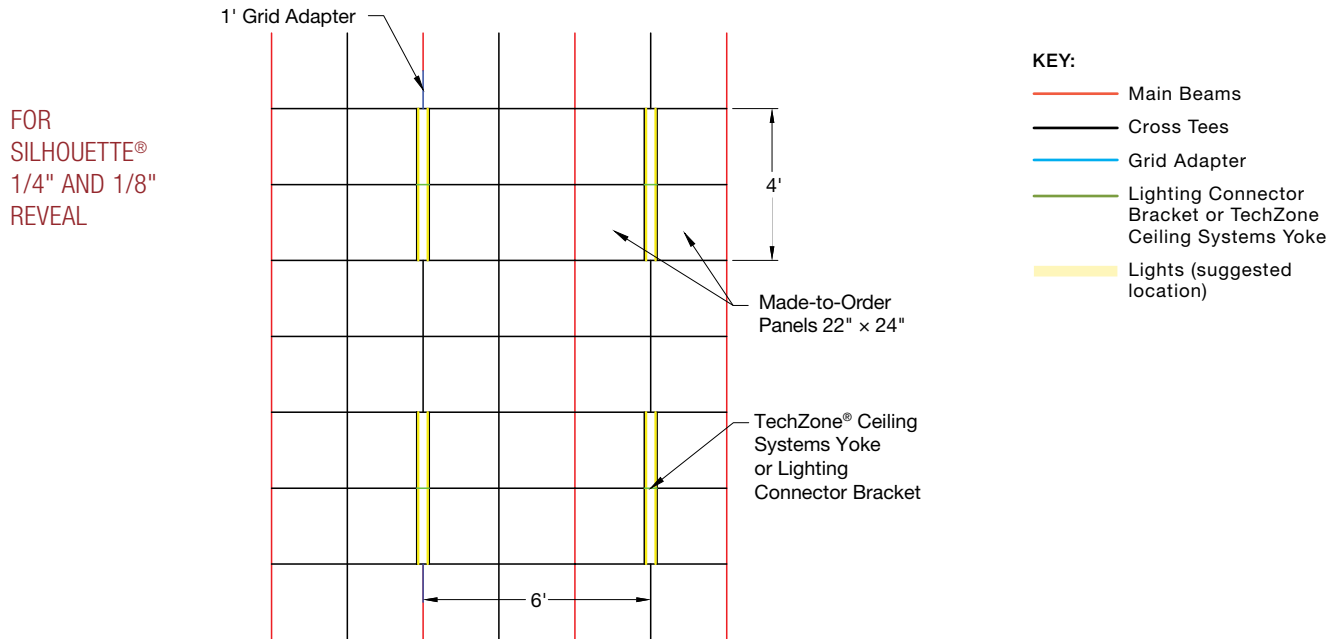

Item No.	Description	UL Classified Acoustics			Total Acoustics ¹	Light Reflect	Sag Resistance	Recycling Program	Recycled Content
		NRC	+	CAC					
Ceiling Panels*									
☐ 1912	Ultima® 24" × 24" Beveled Tegalor	0.75		35	BETTER	0.90	HumiGuard® Plus	Yes	Up to 84%
☐ 1CTN MIN Made-to-Order Sizes or Colors (2 Wks)	Ultima 22" × 24"	N/A		N/A	–	0.90	HumiGuard Plus	Yes	Up to 84%
	NOTE: Up to 6 Weeks for Color & Size Combinations								

* For other ceiling panel options, refer to page 4.

¹ Total Acoustics® ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product. **GOOD** (NRC 0.60-0.65; CAC 35+) **BETTER** (NRC 0.70-0.75; CAC 35+) **BEST** (NRC 0.80+; CAC 35+)

Description	Silhouette® 1/4"	Silhouette 1/8"	Silhouette Notes
Main Beams			
12' HD Main Beam Routes 6" O.C.	☐ 76123	☐ 761238	Routes 12" O.C., Single notch 24" O.C.
Cross Tees			
8' Cross Tee Routes at 24", 46", 48", 50", 72"	☐ XL7689	☐ XL76898	Routes 12" O.C., Double Notch at 24", 72", notched one side at 46", 50", and on opposite side at 48"
4' Cross Tee Routes at 22", 24", 26"	☐ XL7649	☐ XL76498	Routes 12" O.C., Double Notch at 22", 26", and on opposite side at 24"
48" Cross Tee Routes at 24"	☐ XL7646	☐ XL76468	Single Notch 24" O.C.
46" Cross Tee Routes at 22"	☐ XL7647	☐ XL76478	Double Notch at 22"
24" Cross Tee	☐ XL7620	☐ XL76208	Unnotched
22" Cross Tee	☐ XL7622	☐ XL76228	Unnotched
Grid Adapter	☐ GA7699	☐ GA76998	Unnotched
Accessories			
☐ LCB4	4" Lighting Connector Bracket		
☐ TZYK	TechZone® Ceiling Systems Continuous Lighting Yoke (for 4" to 6" wide light fixtures)		
☐ STAC	Single Tee Adapter Clip		

TAKE THE NEXT STEP

877 276-7876

Customer Service Representatives

7:45 a.m. to 5:00 p.m. EST

Monday through Friday

TechLine – Technical information, detail drawings, CAD design assistance, installation information, other technical services – 8:00 a.m. to 5:30 p.m. EST, Monday through Friday.

FAX: 800 572 8324 or

Email: techline@armstrongceilings.com

armstrongceilings.com/commercial

Latest product news

Standard and custom product information

Online catalog

CAD, Revit®, SketchUp® files

A Ceiling for Every Space® Visual Selection Tool

Product literature and samples – express service or regular delivery

Contacts – reps, where to buy, who will install



armstrongceilings.com/projectworks

The power of **ProjectWorks®** Design and Pre-construction Service

ProjectWorks offers cutting-edge collaborative design services to ensure your projects are completed with unmatched precision and efficiency.

Receive 2D layouts, material budgets, and detailed 3D Revit® models to speed up project timelines and improve coordination.

Design with confidence. Partner with ProjectWorks today! Get started at armstrongceilings.com/projectworks

LEED is a registered trademark of the U.S. Green Building Council
SketchUp® is a registered trademark of Trimble Navigation Limited
Revit® is a registered trademark of Autodesk, Inc.; BASO™ is a trademark of BASO, Inc.
All other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates
© 2025 AWI Licensing LLC • Printed in the United States of America

TechLine / 877 276-7876
armstrongceilings.com/linearlighting

Armstrong®

World Industries