SOUNDSCAPES® **Acoustical Canopies** fine texture





SoundScapes® Acoustical Canopies 46-1/2" x 75" Hill panels in White

These shapely canopies enhance acoustics with spot absorption to define spaces.

KEY SELECTION ATTRIBUTES

- · Hill and valley shapes available · Adjustable to special heights
- in multiple sizes
- Energy-efficient, high lightreflectant surface (White only)
- · Embedded flush-mounted hardware system for clean look


COLORS Due to printing limitations, shade may vary from actual product.





Coordinating colors available for Calla® and Lyra® for DESIGNFlex® ceiling panels

ELEVATION VIEWS

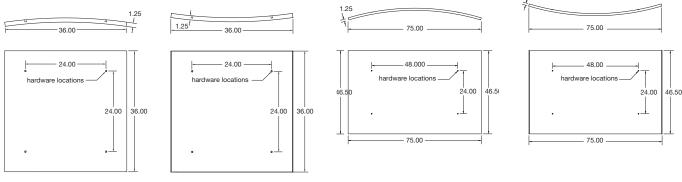

Hill - Hardware side

TechLine 877 276-7876

armstrongceilings.com/soundscapescanopies

Valley – Hardware side

Hill - Hardware side

Select products included in the FAST134

Coordinate with SoundScapes[®]

Shapes and Infusions®

Plum (PM)

program - ready to ship in 4 weeks or less

Cranberry (CN)

Valley - Hardware side

Tangerine (TG)

Black

(BK)

Custom Colors

Available

Kiwi


(KW)



armstrongceilings.com/capabilities See more photos at: armstrongceilings.com/photogallery SOUNDSCAPES®

Acoustical Canopies fine texture



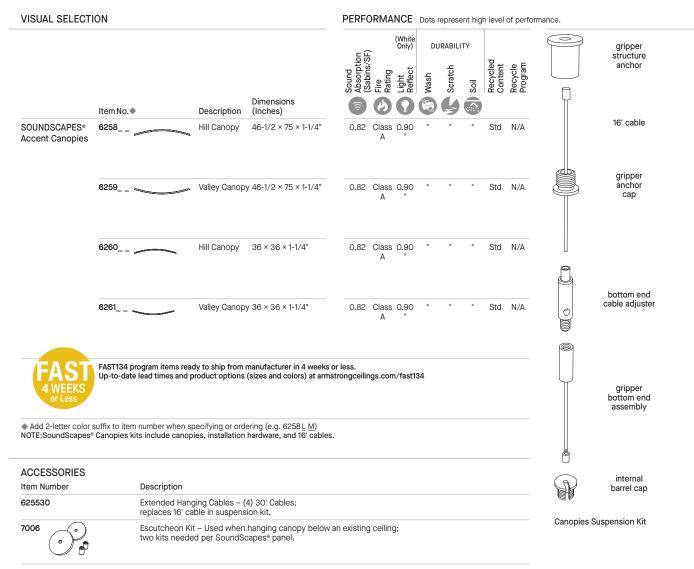

Material Mineral fiber pre-formed in canopy shape Panel Arc

Fixed 129" radius

Surface Finish and Edge Detail DuraBrite® scrim on all sides, finished square edges Fire Performance

Class A: ASTM E84 Class A: Flame Spread Index 25 or under and Smoke Developed Index 50 or less. Canopies may obstruct or skew the planned fire sprinkler water distribution pattern, or possibly delay or accelerate the activation of the sprinkler or fire detection systems

by channeling heat from a fire either toward or away from the device. Designers and installers are advised to consult a fire protection engineer, NFPA 13, and local codes for installation. Design Considerations

SoundScapes® acoustical canopies cannot be cut, drilled, or altered in any way. Panels can be damaged by exposure to moisture, to high temperatures, and to high humidity. They are not approved for exterior application

> Techl ine / 1877 276-7876 armstrongceilings.com/soundscapescanopies BPCS-5088-122

Canopies must be installed a minimum of 18" apart Lipping may be visible in installations closer than 18". Field painting may affect the acoustical and/or fire performance, is not recommended, and will void the product warranty.

Special care in installation and handling must be taken with color canopies to avoid surface damage to the paint finish. The SoundScapes cable hanging system must not hang from any commercial ceiling suspension system. The canopy must not be used to support any other material. Installation Considerations

Canopies must remain in cartons until ready to hang. They require two people to install a panel safely. Do not remove the edge protectors until panel is installed. Canopies in colors require additional care to reduce scuffing.

Seismic Restraint

SoundScapes[®] canopies are approved for application in all seismic areas when installed per the seismic guidelines in the Armstrong ceilings installation instructions. Suspension System

Embedded, flush-mounted hardware system and aircraft cables provided in panel kits.

LEED* is a registered trademark of the U.S. Green Building Council; Living Building Challenge* (LBC) is a registered trademark of the International Living Future Institute*; WELL* and WELL Building Standard are trademarks of the International WELL Building Institute; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2023 AWI Licensing LLC

FAST134 Program Considerations Size of Job Matters: Big jobs, over 2500 SF or 50 pieces for shapes/vertical elements will have longer lead times. Location Matters: Transit time not included. We are ready to ship in 1 week on FAST1 items. However, transit to the states west of Wyoming may add time.

Distributor Truck Schedule Matters: We rely on distribution to help move products around the country. When speed matters, work with your local distributor to ensure FAST134 service.

Stock vs Made-to-Order Matters: FAST3 & FAST4 items are made-to-order and will ship direct to distributor. FAST1 (stocked items) will go through distribution and depend on distributor truck schedules.

Warranty Details at armstrongceilings.com/warranty

Weight Bulk packaged per order

6258, 6259 - 50 lbs per panel 6260, 6261 - 19.4 lbs per panel