

SOUNDSCAPES® Blades

Linear Acoustical Panels – Wood Looks
smooth texture



FAST134
Select Items Ship Fast
armstrongceilings.com/fast134




SoundScapes Blades and SoundScapes® Shapes in Bourbon Cherry (WBC) wood looks with LightArt® LA2 Essentials fixtures

CAD/Revit® drawings at:
armstrongceilings.com/cadrevit



Wall application

ProjectWorks®
Complimentary Design &
Pre-Construction Service



armstrongceilings.com/projectworks

SoundScapes® Blades vertical panels achieve acoustical excellence in your space – with versatile ways to install on ceilings and walls.

KEY SELECTION ATTRIBUTES

- new** • Now available in 7 standard wood-look visuals
- Mix standard designs, lengths, and depths for dynamic visuals
- Sound absorption up to 2.05 NRC dependent on blade depth and spacing
- Select products included in the FAST134 program – ready to ship in 4 weeks or less
- new** • Coordinated Prelude® suspension systems and Lyra® PB wood-look visuals available
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim
- 20 vertical panel sizes and shapes
- Black embedded hanging clips
- Three installation options for maximum ceiling and wall design flexibility
 - From standard suspension system
 - From individual cable suspension
 - Direct-attach method using Axiom® wall molding
- Mold and mildew-resistant surface
- Linear, upscale visual
- Seismic-tested

- Custom panel options available
- Add scrim to top edge as a premium option
- ASTM E84 Class A Fire Performance
- Made in the U.S.A. of domestic and global content
- Build America, Buy America (BABA) Act compliant

FINISHES

new Wood-look Visuals



For premium and custom capabilities, contact ASQuote@armstrongceilings.com



Nature-Inspired Colors Available!

SOUNDSCAPES® Blades

Linear Acoustical Panels – Wood Looks
smooth texture

RECYCLED
CONTENT

53%

LEED V5

COMMON MATERIALS FRAMEWORK
Human Health

Climate Health
Ecosystem Health


Circular Economy

OCCUPANT EXPERIENCE


Acoustics




ACOUSTIC INFORMATION

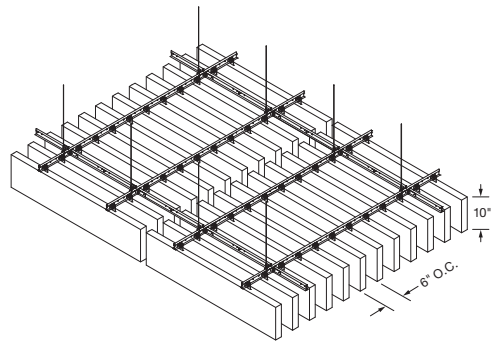


1.15 NRC with 6" O.C.
Blade Spacing

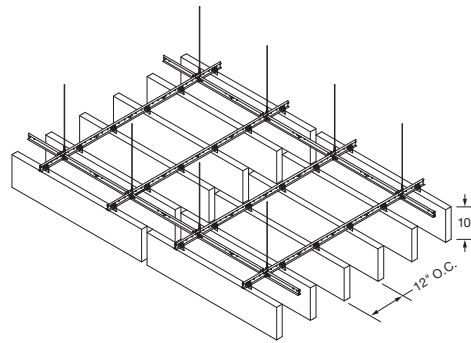

0.95 NRC with 12" O.C.
Blade Spacing

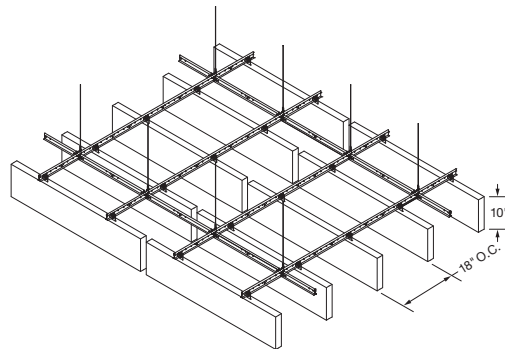

0.75 NRC with 18" O.C.
Blade Spacing

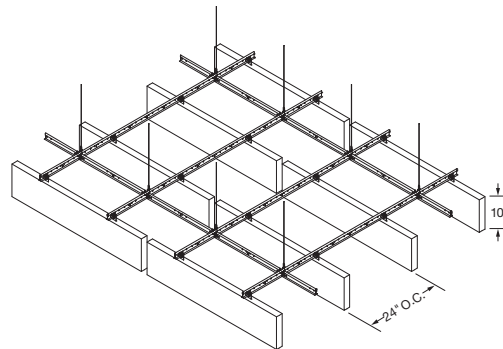


0.60 NRC with 24" O.C.
Blade Spacing



	NRC			
Panel Depth	6" O.C.	12" O.C.	18" O.C.	24" O.C.
5"	0.85	0.60	0.45	0.35
7-1/2"	1.00	0.75	0.60	0.50
10"	1.15	0.95	0.75	0.60
10-1/2"	1.20	1.00	0.80	0.65
16"	1.50	1.25	1.00	0.85
19-1/2"	1.65	1.35	1.15	1.00
22"	1.80	1.45	1.25	1.10
22-1/2"	1.85	1.50	1.30	1.15
28"	2.05	1.70	1.45	1.30

NOTE: Tested per ASTM C423 without infill panels. Spacing of blades, blade depth, and acoustical infill panels will impact acoustical performance. Contact TechLine for a custom reverberation time report at techline@armstrongceilings.com



THREE WAYS TO INSTALL




Direct to Grid
Suspension System





Individual Suspension
using Hanging Kit



Direct-attach Method
using Axiom® Wall Molding



CUSTOM PANEL DESIGN EXAMPLES

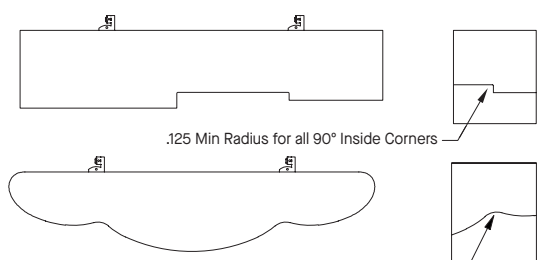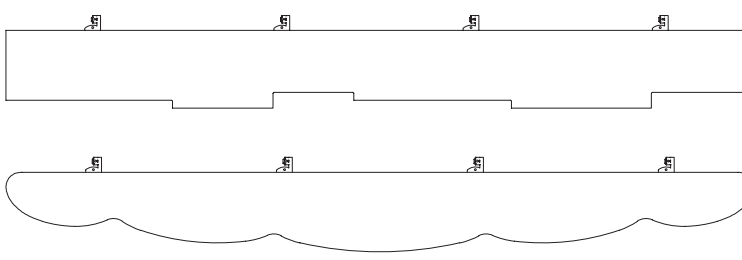

.125 Min Radius for all 90° Inside Corners

2.0 Min Radius Anywhere
Other Than 90° Inside Corners

SOUNDSCAPES® Blades

Linear Acoustical Panels – Wood Looks

smooth texture

RECYCLED
CONTENT

53%

LEED V5

COMMON MATERIALS FRAMEWORK

Human Health

Climate Health

Ecosystem Health

Circular Economy

OCCUPANT EXPERIENCE

Acoustics



VISUAL SELECTION

Shown in elevation view

Item No. ♦	Description	Dimensions (D × L × Thickness)	
8250F04RH05 _ _ _	Rectangular Vertical Panel	5 × 46 × 1-3/4"	
8250F04RH06 _ _ _	Rectangular Vertical Panel	5 × 94 × 1-3/4"	
8250F04RH01 _ _ _	Rectangular Vertical Panel	10 × 46 × 1-3/4"	
8250F04RH02 _ _ _	Rectangular Vertical Panel	10 × 94 × 1-3/4"	
8250F04RH07 _ _ _	Rectangular Vertical Panel	16 × 46 × 1-3/4"	
8250F04RH08 _ _ _	Rectangular Vertical Panel	16 × 94 × 1-3/4"	
8250F04RH03 _ _ _	Rectangular Vertical Panel	22 × 46 × 1-3/4"	
8250F04RH04 _ _ _	Rectangular Vertical Panel	22 × 94 × 1-3/4"	

FAST
4 WEEKS
or Less

FAST134 program items ready to ship from manufacturer in 4 weeks or less.
Up-to-date lead times and product options (sizes and colors) at armstrongceilings.com/fast134

NOTE: Scrimmed top edges offered as "Premium," contact ASQuote@armstrongceilings.com
♦ Add 3-letter color suffix to end of item number (e.g., 8250F04RH02 W H Q = Honey Oak)

PERFORMANCE

Dots represent high level of performance.

Fire Rating	Bio-Block® Anti-Mold/ Mildew	Humi-Guard+ Sag Resist	CleanAssure™ Disinfectable Panels	
Class A	*	*	*	*
Class A	*	*	*	*
Class A	*	*	*	*
Class A	*	*	*	*
Class A	*	*	*	*
Class A	*	*	*	*
Class A	*	*	*	*

BLADES – Standard

TechLine 877 276-7876

armstrongceilings.com/soundscapesblades

Armstrong®
World Industries

SOUNDSCAPES® Blades

Linear Acoustical Panels – Wood Looks

smooth texture

RECYCLED
CONTENT

53%

LEED V5

COMMON MATERIALS FRAMEWORK

Human Health

Climate Health

Ecosystem Health

Circular Economy



OCCUPANT EXPERIENCE

Acoustics



VISUAL SELECTION Shown in elevation view

Item No. ♦	Description	Dimensions (D × L × Thickness)	
8250F04RH09 _ _ _	Rectangular Vertical Panel	28 × 46 × 1-3/4"	
8250F04RH10 _ _ _	Rectangular Vertical Panel	28 × 94 × 1-3/4"	
8250F04CH01 _ _ _	Hill Vertical Panel	7-1/2 × 46 × 1-3/4"	
8250F04CH02 _ _ _	Valley Vertical Panel	10-1/2 × 46 × 1-3/4"	
8250F04CH03 _ _ _	Hill Vertical Panel	19-1/2 × 46 × 1-3/4"	
8250F04CH04 _ _ _	Valley Vertical Panel	22-1/2 × 46 × 1-3/4"	
8250F04WH01 _ _ _	Wave Vertical Panel	10-1/2 × 94 × 1-3/4"	
8250F04WH02 _ _ _	Wave Vertical Panel	22-1/2 × 94 × 1-3/4"	
8250F04WH03 _ _ _	Wave Vertical Panel	10 × 46 × 1-3/4"	

FAST
4 WEEKS
or Less

FAST134 program items ready to ship from manufacturer in 4 weeks or less.
Up-to-date lead times and product options (sizes and colors) at armstrongceilings.com/fast134

NOTE: Scrimmed top edges offered as "Premium," contact ASQuote@armstrongceilings.com
♦ Add 3-letter color suffix to end of item number (e.g., 8250F04RH02 W H Q = Honey Oak)

TechLine 877 276-7876
armstrongceilings.com/soundscapesblades

PERFORMANCE Dots represent high level of performance.

Fire Rating	Bio-Block® Anti-Mold/ Mildew	Humi-Guard+ Sag Resist	CleanAssure™ Disinfectable Panels	
Fog	Spray			
Class A	*	*	*	*
Class A	*	*	*	*
Class A	*	*	*	*
Class A	*	*	*	*
Class A	*	*	*	*
Class A	*	*	*	*
Class A	*	*	*	*
Class A	*	*	*	*

BLADES – Standard

Armstrong®
World Industries

SOUNDSCAPES® Blades

Linear Acoustical Panels – Wood Looks

smooth texture

RECYCLED
CONTENT

53%

LEED V5

COMMON MATERIALS FRAMEWORK

Human Health

Climate Health

Ecosystem Health

Circular Economy

OCCUPANT EXPERIENCE

Acoustics



VISUAL SELECTION

Shown in elevation view

Item No. ♦	Description	Dimensions (D × L × Thickness)
8250F04WH04	Wave Vertical Panel	22 × 46 × 1-3/4"
8250F04WH05	Double Wave Vertical Panel	10 × 94 × 1-3/4"
8250F04WH06	Double Wave Vertical Panel	22 × 94 × 1-3/4"

PERFORMANCE

Dots represent high level of performance.

Fire Rating	Bio-Block® Anti-Mold/ Mildew	Humi-Guard+ Sag Resist	CleanAssure™ Disinfectable Panels
Class A	*	*	*
Class A	*	*	*
Class A	*	*	*

FAST
4 WEEKS
or Less

FAST134 program items ready to ship from manufacturer in 4 weeks or less.
Up-to-date lead times and product options (sizes and colors) at armstrongceilings.com/fast134

NOTE: Scrimmed top edges offered as "Premium," contact ASQuote@armstrongceilings.com
♦ Add 3-letter color suffix to end of item number (e.g., 8250F04RH02 **W H Q** = Honey Oak)

STANDARD WOOD-LOOK VISUALS

Color-coordinated standard Prelude® Suspension System colors shown below.

Brown Sugar Walnut (WBS)	Prelude Suspension System in Black (BL)	Toffee Chestnut (WTC)	Prelude Suspension System in Oat (SOT)	Vanilla Ash (WVA)	Prelude Suspension System in Hay (SHY)	Honey Oak (WHO)	Prelude Suspension System in Hay (SHY)
Bourbon Cherry (WBC)	Prelude Suspension System in Black (BL)	Earl Grey Teak (WGT)	Prelude Suspension System in Grey Stone (GS)	Dark Mocha Walnut (WMW)	Prelude Suspension System in Black (BL)		

TechLine 877 276-7876

armstrongceilings.com/soundscapesblades

Armstrong®
World Industries

SOUNDSCAPES® Blades

Linear Acoustical Panels – Wood Looks

smooth texture

RECYCLED
CONTENT

LEED V5

53%

COMMON MATERIALS FRAMEWORK

Human Health

Climate Health

Ecosystem Health

Circular Economy



OCCUPANT EXPERIENCE

Acoustics




INSTALLATION OPTIONS

	Item No. ♦	Description	LF/CTN
Direct to Grid Suspension System	7301 _ _ _	12' HD Main Beam	240
	XL7342 _ _ _	4' Cross Tee	240
	XL7328 _ _ _	2' Cross Tee	120
	7800 _ _ _	12' Angle Molding	360
360° Painted Direct to Grid Suspension System	730136 _ _	12' HD Main Beam (BL & WH)	240
	XL734036 _ _	4' Cross Tee (BL & WH)	240
	XL732036 _ _	2' Cross Tee (BL & WH)	120
	780036 _ _	12' Angle Molding (BL & WH)	360
	56418	12' HD Main Beam	240
	56421	4' Cross Tee	240
	56419	2' Cross Tee	120
Floating Cloud Installations	7800	12' Angle Molding	360
	AX4STR3 _ _	10' Axiom® Classic 4" Straight Trim	See note*

♦ When specifying or ordering items with a color, add the 2- or 3-digit suffix to the end of the item number (e.g. 7301 B L)

* 360° Paint Recommended; order by the piece

Prelude® XL®



	Item No. ♦	Description	PCS/CTN
Direct-Attach with Axiom® Wall Molding	AXM34STR3 _ _	10' Straight Wall Molding	See note*
	6655L8CR	4-Point Hanging Kit	4 per bag
		Individual Suspension Using Hanging Kit	
Accessories	ARBRKT	Adjustable Hanger Bracket	80
	6459BL	Black Rigid Attachment Clip	25
	STAC	Single Tee Adapter Clip	120
	625530	Extended Hanging Aircraft Cables (30')	4

♦ When specifying or ordering items with a color, add the 2- or 3-digit suffix to the end of the item number (e.g. 7301 S H Y). 15/16" Prelude® XL® Suspension System available in coordinating colors. For the appropriate 3-digit color suffix, please visit armstrongceilings.com/suspensionsystems

PHYSICAL DATA

Material

1-3/4" thick fiberglass with acoustically transparent membrane on face and sides.

Surface Finish

Acoustically transparent membrane. Top of panel is unfinished with black embedded hanging clips.

Fire Performance

SoundScapes® Blades panel material is ASTM E84 Class A: Flame Spread 25 or under and Smoke Developed 50 or less.

CAN/ULC S102 surface burning characteristics.

Flame Spread Rating 25 or less. Smoke Developed Classification 50 or less.

SoundScapes Blades panels, as with other architectural features located in the ceiling plane, may obstruct or skew the existing or planned fire sprinkler water distribution pattern, or possibly delay the activation of the fire sprinkler or fire detection system. Consult a fire protection engineer, NFPA 13, and local codes for guidance on the proper installation techniques where fire detection or suppression systems are present.

FAST134 Program Considerations

Size of Job Matters: Big jobs, over 2500 SF or 50 pieces for shapes/vertical elements will have longer lead times.

Location Matters: Transit time not included. We are ready to ship in 1 week on FAST1 items. However, transit to the states west of Wyoming may add time.

Distributor Truck Schedule Matters: We rely on distribution to help move products around the country. When speed matters, work with your local distributor to ensure FAST134 service.

Stock vs Made-to-Order Matters: FAST3 & FAST4 items are made-to-order and will ship direct to distributor. FAST1 (stocked items) will go through distribution and depend on distributor truck schedules.

ProjectWorks® Collaborative Design Service

Complimentary design assistance that streamlines projects with detailed layouts, 3D Revit Models, finish schedules, and more.

ProjectWorks Pre-Construction Service

Comprehensive drawing packages and a fully priced bill of materials to support bidding, ordering, and installation.

Visit armstrongceilings.com/projectworks

Anti-Mold/Mildew

Ceiling tiles with BioBlock® performance resist the growth of mold and mildew on the tile surface.

Design Considerations

SoundScapes Blades panels maintain a natural bow that may be noticeable when installed 2" or less apart.

Special care in installation and handling must be taken with wood-look blades to avoid surface damage. Be advised thickness on wood-look blades is 1/4" less than painted blades.

5" SoundScapes Blades can now be used on walls, but are not recommended for use in high-traffic or high-impact areas. For best results, install above 7" from floor level.

SoundScapes Blades panels can be ordered with scrim on top edge as a premium.

All wood-look blades are produced with wood grain parallel to the panel length. Wood-look visuals are designed to mimic slight color variations as seen in real wood.

Seismic Restraint

SoundScapes Blades are approved for all seismic areas when installed per the seismic guidelines in the Armstrong Ceilings installation instructions.

Recommended Suspension Systems

SoundScapes Blades panels are pre-assembled with metal hanging clips in the top of the panels. See Installation Instructions BPLA-297844 for installation details.

Warranty

Details at armstrongceilings.com/warranty

Panel Weight

8250F04RH01 – 5.1 LBS/PC	8250F04CH01 – 4.0 LBS/PC
8250F04RH02 – 10.3 LBS/PC	8250F04CH02 – 5.4 LBS/PC
8250F04RH03 – 10.5 LBS/PC	8250F04CH03 – 9.4 LBS/PC
8250F04RH04 – 20.9 LBS/PC	8250F04CH04 – 10.7 LBS/PC
8250F04RH05 – 2.9 LBS/PC	8250F04WH01 – 10.7 LBS/PC
8250F04RH06 – 5.8 LBS/PC	8250F04WH02 – 21.3 LBS/PC
8250F04RH07 – 7.8 LBS/PC	8250F04WH03 – 5.1 LBS/PC
8250F04RH08 – 15.6 LBS/PC	8250F04WH04 – 10.5 LBS/PC
8250F04RH09 – 13.1 LBS/PC	8250F04WH05 – 10.3 LBS/PC
8250F04RH10 – 26.2 LBS/PC	8250F04WH06 – 20.9 LBS/PC

Panels/ Carton

4 panels/carton; 2 panels/carton for items 8250F04RH04, 8250F04RH10, 8250F04WH02, and 8250F04WH06 only

Minimum Order Quantity

1 carton