

SOUNDSCAPES® Blades

Linear Acoustical Wall Panels
fine texture



FAST 134
Select Items Ship Fast
armstrongceilings.com/fast134



SoundScapes® Blades wall panels in Riverstone (DRV), and SoundScapes Blades wave designs in Mist (DMT) and Rainstorm (DRS)

CAD/Revit® drawings at:
armstrongceilings.com/cadrevit



Ceiling application


Linear acoustical panels help reduce reverberation time in your space.

KEY SELECTION ATTRIBUTES

- new** • Now available in 15 colors inspired by nature
- Direct attach to wall using Axiom® Wall Molding
- White embedded hanging clips
- Sound absorption up to 0.80 NRC dependent on blade spacing
- Custom panel options available
- Select products included in the FAST134 program – ready to ship in 4 weeks or less. See up-to-date lead times at armstrongceilings.com/fast134
- Made in the U.S.A. of domestic and global content
- Build America, Buy America (BABA) Act compliant

COLORS Due to printing limitations, shade may vary from actual product.

new Painted

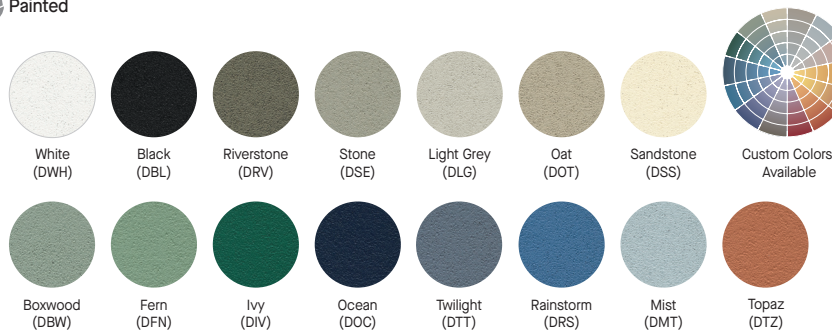

For premium and custom capabilities, contact ASQuote@armstrongceilings.com



Wood Looks Available!

SOUNDSCAPES® Blades

Linear Acoustical Wall Panels
fine texture

RECYCLED
CONTENT

LEED V5

UP TO
43%

COMMON MATERIALS FRAMEWORK

Human Health

Climate Health



Ecosystem Health

Circular Economy

OCCUPANT EXPERIENCE

Acoustics

VISUAL SELECTION Shown in elevation view

Item No. ♦	Description	Dimensions (Inches)
SOUNDSCAPES® 8250F03RH05_ _ _ Blades <small>(formerly item no. 7190)</small>	Rectangular Vertical Panel	5 × 46 × 2" 
8250F03RH06_ _ _ <small>(formerly item no. 7191)</small>	Rectangular Vertical Panel	5 × 94 × 2" 



FAST134 program items ready to ship from manufacturer in 4 weeks or less. Up-to-date lead times and product options (sizes and colors) at armstrongceilings.com/fast134

NOTE: Scrimmed top edges offered as "Premium."
♦ Add 3-letter color suffix to end of item number (e.g., 8250F03RH05 D W H = White)

PERFORMANCE Dots represent high level of performance.

(White only)	Light Reflect	Fire Rating	Bio-Block® Anti-Mold/Mildew	Humi-Guard+ Sag Resist	CleanAssure™ Disinfectable Panels	Fog	Spray	Wash	Soil	Impact	DURABILITY
0.88 Class A	•	•	•	•	•	•	•	•	•	•	•
0.88 Class A	•	•	•	•	•	•	•	•	•	•	•


ACOUSTIC INFORMATION

Panel Depth	6" O.C.	12" O.C.	18" O.C.	24" O.C.
5"	0.80	0.50	0.40	0.30

NOTE: Tested per ASTM C423 without infill panels. Spacing of blades, blade depth, and acoustical infill panels will impact acoustical performance. Contact TechLine for a custom reverberation time report at techline@armstrongceilings.com

INSTALLATION OPTIONS

Item No. ♦	Description	PCS/CTN
Direct-Attach with Axiom® Wall Molding AXM34STR3_ _ _	10' Straight Wall Molding (360° Paint Recommended; order by the piece)	

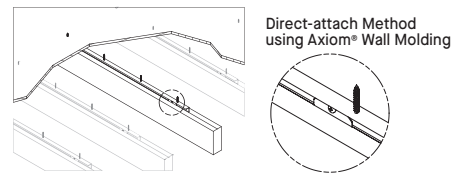

♦ When specifying or ordering items with a color, add the two-letter suffix to the end of the item number (e.g. AXM34STR3 B L)

PHYSICAL DATA

Material
2" thick fiberglass with DuraBrite® scrim on face and sides.

Surface Finish
Colors: DuraBrite scrim with factory-applied paint on face and sides. Standard White has energy-saving, high light-reflective finish (LR 0.88). Top of panel is unfinished with white embedded hanging clips.

Fire Performance
SoundScapes® Blades panel material is ASTM E84 Class A: Flame Spread 25 or under and Smoke Developed 50 or less.

CAN/ULC S102 surface burning characteristics.
Flame Spread Rating 25 or less. Smoke Developed Classification 50 or less.

Design Support
For custom design assistance contact ProjectWorks® Design Services or visit armstrongceilings.com/projectworks

Anti-Mold/Mildew
Ceiling tiles with BioBlock® performance resist the growth of mold and mildew on the tile surface.

Design Considerations
SoundScapes Blades panels maintain a natural bow that may be noticeable when installed 2" or less apart.
Special care in installation and handling must be taken with color panels to avoid surface damage to the paint finish. Custom colors are available.
5" SoundScapes Blades can now be used on walls, but are not recommended for use in high-traffic or high-impact areas. For best results, install above 7" from floor level.
SoundScapes Blades panels can be ordered with scrim on top edge as a premium.
Seismic Restraint
SoundScapes Blades are approved for all seismic areas when installed per the seismic guidelines in the Armstrong Ceilings installation instructions.

FAST134 Program Considerations
Size of Job Matters: Big jobs, over 2500 SF or 50 pieces for shapes/vertical elements will have longer lead times.
Location Matters: Transit time not included. We are ready to ship in 1 week on FAST1 items. However, transit to the states west of Wyoming may add time.
Distributor Truck Schedule Matters: We rely on distribution to help move products around the country. When speed matters, work with your local distributor to ensure FAST134 service.
Stock vs Made-to-Order Matters: FAST3 & FAST4 items are made-to-order and will ship direct to distributor. FAST1 (stocked items) will go through distribution and depend on distributor truck schedules.
Warranty
Details at armstrongceilings.com/warranty

Panel Weight
8250F03RH05 – 2.2 LBS per panel
8250F03RH06 – 4.3 LBS per panel

Panels/ Carton
4

Minimum Order Quantity
1 carton

