

# TRANSITION MOLDINGS

## Acoustical-to-Drywall Transition Molding

*A FrameAll®  
Drywall Grid Solution*



Acoustical-to-Drywall Transition Molding

Transition moldings save time and money and are easier to install.

### KEY SELECTION ATTRIBUTES

- Fewer parts and pieces; combines acoustical molding with drywall taping flange
- Pre-punched vertical web to improve screw attachment
- Knurled and slotted integral taping flange on items 7901, 7902, 7904, 7905, 7906, 7907, and 7908 accommodates taping and finishing
- Protective film on the face of the wall molding flange of 7904PF and 7905PF facilitates faster, easier mudding, sanding, and taping
- Compatible with all types of framing including FrameAll® Drywall Grid and ShortSpan® framing
- 7915 with 7/8" acoustical flange for seismic applications

### VISUAL SELECTION

|                                  | Item No.        | Flange | Length | Reveal      | Pcs/Ctn. | LF/Ctn. |  |
|----------------------------------|-----------------|--------|--------|-------------|----------|---------|--|
| Shadow Reveal Transition Molding | 7901            | 9/16"  | 120"   | 3/8"        | 12       | 120     |  |
|                                  | 7902            | 15/16" | 120"   | 3/8"        | 12       | 120     |  |
|                                  | 7911            | 9/16"  | 120"   | 3/8" x 1/4" | 12       | 120     |  |
|                                  | 7912            | 15/16" | 120"   | 3/8" x 1/4" | 12       | 120     |  |
| Flush Transition Molding         | 7903            | 9/16"  | 120"   | 1"          | 12       | 120     |  |
|                                  | 7904<br>7904PF* | 15/16" | 120"   | N/A         | 12       | 120     |  |
|                                  | 7905<br>7905PF* | 9/16"  | 120"   | N/A         | 12       | 120     |  |

# TRANSITION MOLDINGS

## Acoustical-to-Drywall Transition Molding

LEED® WELL | LBC

UP TO 61% RECYCLED CONTENT

energy management

construction waste mgmt

regional materials

design for flexibility

EPD

recyclable/producer resp.

biobased materials

recycled content

sourcing of raw materials

material ingredient reporting

low emitting materials

lighting quality

acoustics

Calculate sustainability with Ecomedes

armstrongceilings.com/ecomedes

LOCATION DEPENDENT

Well Building Standard™ (WELL) Living Building Challenge® (LBC)

### VISUAL SELECTION


|                               | Item No. | Flange | Length | Transition Height | Pcs/Ctn | LF/Ctn. |  |
|-------------------------------|----------|--------|--------|-------------------|---------|---------|--|
| F Vertical Transition Molding | 7906     | 1/2"   | 120"   | N/A               | 12      | 120     |  |
|                               | 7913     | 9/16"  | 120"   | N/A               | 12      | 120     |  |
|                               | 7914     | 15/16" | 120"   | N/A               | 12      | 120     |  |
|                               | 7915     | 7/8"   | 120"   | N/A               | 12      | 120     |  |
|                               | 7907     | 9/16"  | 120"   | 15/16"            | 12      | 120     |  |
| Tegular Transition Molding    | 7908     | 15/16" | 120"   | 15/16"            | 12      | 120     |  |
|                               | 7909     | 15/16" | 120"   | 1"                | 12      | 120     |  |
| Step Transition Molding       | 7910     | 9/16"  | 120"   | 1"                | 12      | 120     |  |

\* Protective film applied to face of wall molding flange for easier finishing.

### ACCESSORIES


**2" Beam End Retaining Clip** – Joins main beam or cross tee to wall molding and web of suspension system with no visible pop rivets.

**ALBERC2** (aluminum) – 200 pcs  
**FZALBERC2** (aluminum) – 50 pcs  
**BERC2** (steel) – 200 pcs  
**FZBERC2** (steel) – 50 pcs



**Knurled Angle Molding** – Hemmed with prefinished exposed flanges.

**KAM10** – 10 pcs  
**KAM12** – 10 pcs



# TRANSITION MOLDINGS

## Acoustical-to-Drywall Transition Molding

LEED® WELL | LBC

UP TO 61% RECYCLED CONTENT

energy management

construction waste mgmt

regional materials

design for flexibility

EPD

recyclable/extended producer resp.

biobased materials

recycled content

sourcing of raw materials

material ingredient reporting

low emitting materials

lighting quality

acoustics

Calculate sustainability with Ecomedes


armstrongceilings.com/ecomedes

Well Building Standard® (WELL)


Living Building Challenge® (LBC)

### INSTALLATION DETAILS


Drywall to Acoustical (Acoustical Flange with 3/8" reveal) 7901 – 9/16" and 7902 – 15/16"

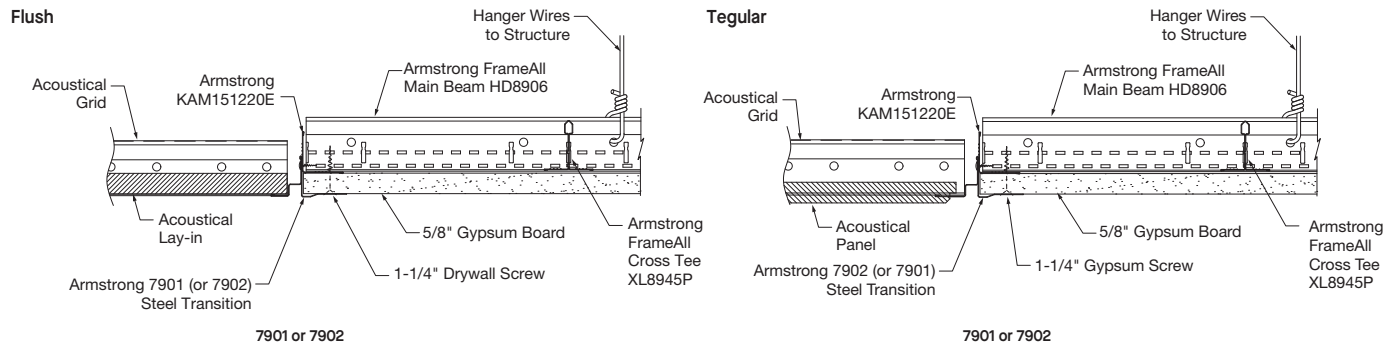



Drywall to Acoustical 1" Step 7909 – 15/16" and 7910 – 9/16"

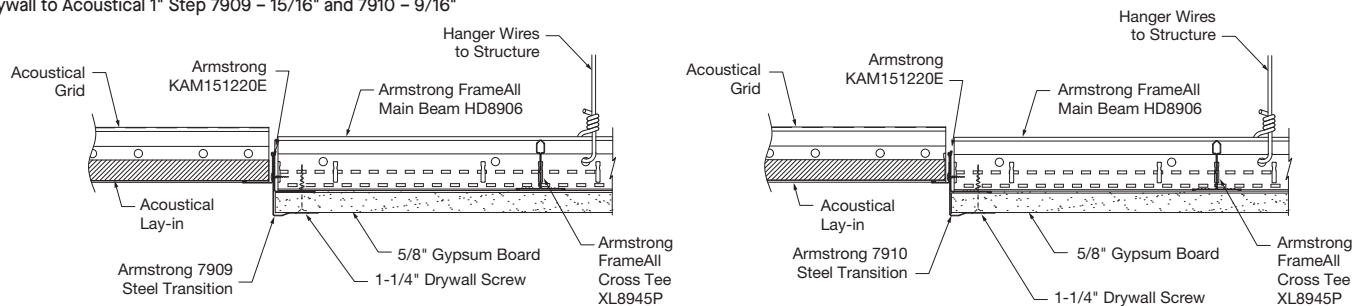

Drywall to Acoustical (1" Inverted T) 7903

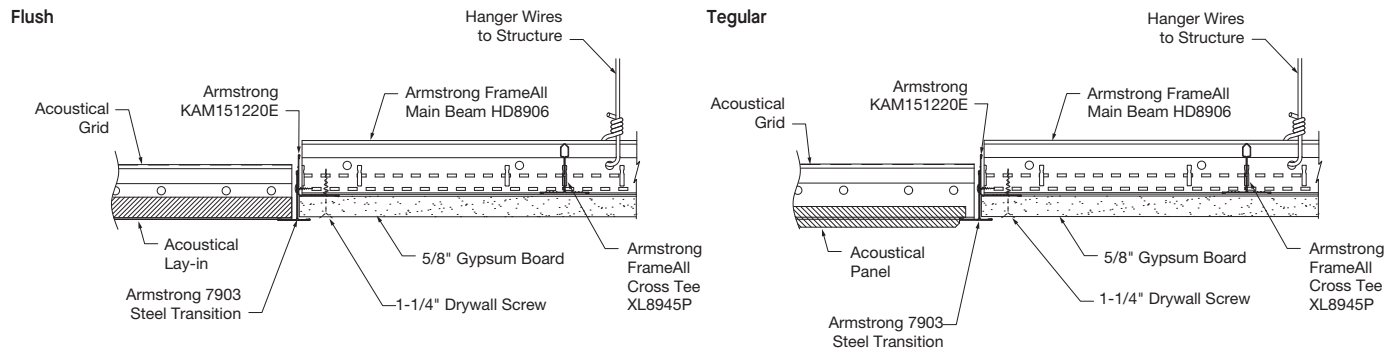

Drywall to Acoustical Flush Transition 7904/7904PF – 15/16" and 7905/7905PF – 9/16"

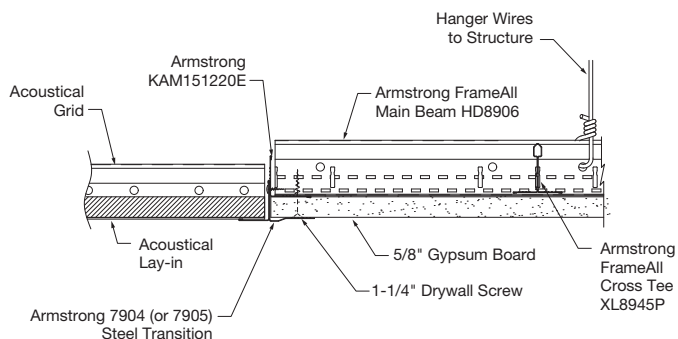

Items 7904PF and 7905PF feature protective film applied to the face of the wall molding flange for faster, easier finishing.

# TRANSITION MOLDINGS

## Acoustical-to-Drywall Transition Molding

LEED® WELL LBC

UP TO 61% RECYCLED CONTENT

energy management

construction waste mgmt

regional materials

design for flexibility

EPD

recyclable/ bio-based materials

recycled content

sourcing of raw materials

material ingredient reporting

low emitting/ materials

lighting quality

acoustics

Calculate sustainability with Ecomedes


armstrongceilings.com/ecomedes

LOCATION DEPENDENT


Well Building Standard™ (WELL) Living Building Challenge® (LBC)

### INSTALLATION DETAILS (CONTINUED)


#### F Vertical Transition Molding Flush 7906

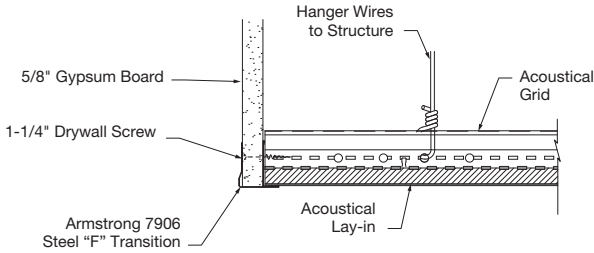



#### F Vertical Transition Molding Flush 7915

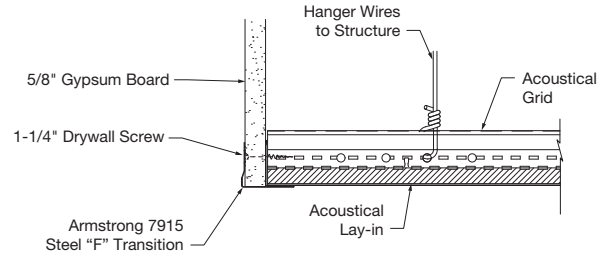

#### Drywall-to-Acoustical Tegular 7907 - 9/16" and 7908 - 15/16"

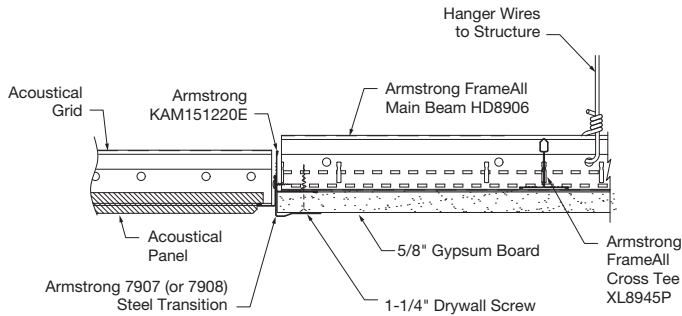

#### Drywall to Acoustical (Acoustical Flange with 3/8" x 1/4" reveal) 7911 - 9/16" and 7912 - 15/16"

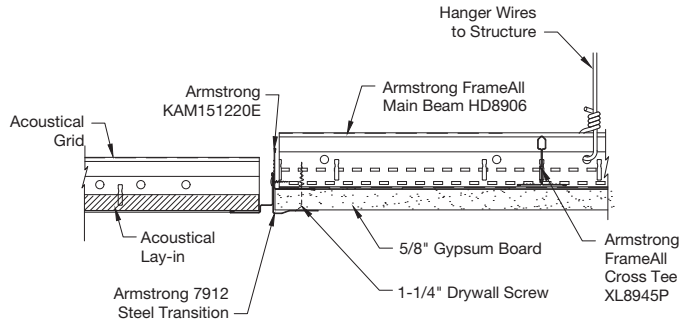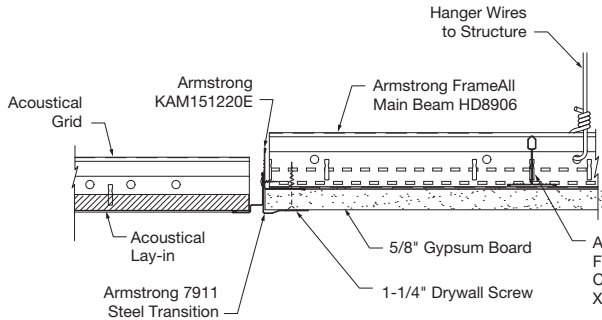

#### Stepped 7913 - 9/16" and 7914 - 15/16"

