


TECTUM® Create!™ Direct-Attach

Standard & Custom Wall Panels
coarse texture



CAD/Revit® drawings at:
armstrongceilings.com/cadrevit



1" thick Tectum Create! Direct-Attach 47-3/4" x 96" vertical wall panels in standard Textured Hex design

Transform interior spaces with distinctive image depth and personality on texture-rich Tectum® Create!™ Direct-Attach wall panels.

KEY SELECTION ATTRIBUTES

new

- Now, 1" thick Tectum® Create!™ Direct-Attach panels are available in four standard designs or submit your own custom artwork
- Repeat panel patterns can span wall surfaces in both vertical and horizontal directions
- Excellent sound absorption – NRC up to 0.85 (mounting method dependent)
- Panel sizes include 23-3/4" x 48" and 47-3/4" x 96" with long and short beveled edges (No additional custom sizes available)
- Panels can be directly attached to a wide variety of interior wall surfaces
- Great retrofit solution for noise reduction

new

- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim
- Sustainable Beyond Standard: Custom sizes in 1" thickness and all standard panels are part of the Sustain® portfolio and meet the most stringent industry sustainability compliance standards today
- Create your one-of-a-kind acoustic artwork! To get started, contact ASQuote@armstrongceilings.com
- Made in the U.S.A. of domestic and global content
- Build America, Buy America (BABA) Act compliant

STANDARD DESIGNS

Multiple panels are used to create full patterns.



Textured Hex (CXH)



Exposed Brick (CXB)





Rustic Plank (CXP)




Steady Wave (CXW)


Steady Wave 23-3/4" x 48"



Steady Wave 47-3/4" x 96"



DETAILS



- Rustic Plank design on multiple Tectum Create! Direct-Attach panels viewed from greater than 5'
- Close-up of Rustic Plank Tectum Create! image from Detail 1

NOTE: For optimal visual, product is best viewed at a distance with direct lighting. Panel face and bevel are printed, while vertical edges are painted white. Custom solid color edge painting is available upon request.

TECTUM® Create!™ Direct-Attach

Standard & Custom Wall Panels coarse texture



Declare.

LEED V5

COMMON MATERIALS FRAMEWORK		Climate Health	EPD
Human Health	Declare Label	Ecosystem Health	EPD
	HPD		
	3rd Party CDPH	Circular Economy	
OCCUPANT EXPERIENCE		Acoustics	✓

VISUAL SELECTION

Item No. ◆	Dimensions W × L × H (Inches)
TECTUM® Create!™ Direct-Attach Standard Wall Panels Long Edges Beveled/ Short Edges Beveled*	5334W2L04T10_ _ _ 23-3/4 × 48 × 1"
	5334W4L08T10_ _ _ 47-3/4 × 96 × 1"

* Printed image will continue on beveled edge. Vertical edge of panel will be painted Tectum White (TWH) unless specified otherwise.
◆ When specifying or ordering, include the appropriate 3-digit design suffix (CXH = Textured Hex, CXB = Exposed Brick, CXP = Rustic Plank, CXW = Steady Wave) and panel identifier = A-D (e.g. 5334W2L04T10 C X B C)

PERFORMANCE

Dots represent high level of performance.

Fire Rating	Bio-Block Anti-Mold/ Mildew	Humi-Guard+ Sag Resist	CleanAssure™ Disinfectable Panels	DURABILITY Fog Impact
Class A	*	*	*	*
Class A	*	*	*	*

ACOUSTICAL INFORMATION

Panel Thickness	NRC	Mounting Methods
1"	0.40	A
	0.45	D-20
	0.80	C-20
	0.85	C-40

Tailor Designs with Custom Tectum Create! Wall Panels

Create beautiful, unique spaces with printed imagery on Direct-Attach wall panels



Higher resolution files will have best results. The rich texture of the panels enhances images with high contrast, and appears almost three-dimensional when viewed from greater than 5'.

Raster Images: Digital photographs should be created in a raster based program such as Adobe® Photoshop®.

- Image must be 150 dpi at full print size
- Acceptable file types:
 - Joint Photographic Experts Group – .jpg
 - Tagged Image File Format – .tiff
- Acceptable color mode: RGB

Vector Graphics: Logos and illustrations should be created in a vector-based program such as Adobe® Illustrator®.


- Acceptable file types:
 - Encapsulated PostScript – .eps
 - Scalable Vector Graphics – .svg
- Acceptable color mode: CMYK

* Armstrong will not be held liable for artwork color variances from computer screen to completed project, or between runs of similar material.


ACOUSTICAL MOUNTING METHODS

Based on desired final aesthetic, installer may want to field-color screw heads using permanent markers (by others) to coordinate with image colors.


Mounting A




Mounting D-20



Mounting C-20



Mounting C-40

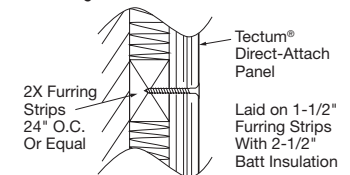

PHYSICAL DATA

Material

Cementitious Wood Fiber

Surface Finish

Factory-applied latex paint with powerful LED curing technology.

Fire Performance

Class A. Flame Spread Index 25 or less and Smoke Developed Index 50 or less when tested in accordance with ASTM E84.

Humidity/Sag Resistance

HumiGuard® Plus performance panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

Anti-Mold/Mildew

Ceiling panels with BioBlock® performance resist the growth of mold and mildew on the panel surface.

VOC Emissions

Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL

Building Standard®, CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

Installation Considerations

The face and bevels of the panel are printed. Vertical edges of the panel are painted Tectum White (TWH). Custom solid colors may be available upon specification.

Viewing angles and direct light will impact the viewing surface and have varied results inherent to the manufacturing process.

Additionally, low angle lighting exaggerates those variations and is not recommended for Tectum installations.

For touch-up solutions, use colored permanent markers to touch-up any defects on the board or to blend white or unfinished screw faces.

Primary (Embodied) Energy

See all LCA information on our EPDs.

Application Considerations

Color variation among panels is common due to the natural characteristics of the wood. The rich texture of the panels enhances images with high contrast, and appear almost three-dimensional when viewed from greater than 5'.

Tectum Create! is not for use in exterior spaces.

LEED® is a registered trademark of the U.S. Green Building Council; Declare® and Living Building Challenge™ (LBC) are trademarks of the International Living Future Institute®; WELL™ and WELL Building Standard™ are trademarks of the International WELL Building Institute; Adobe®, Illustrator®, and Photoshop® are registered trademarks of Adobe in the United States and/or other countries; Revit® is a registered trademark of Autodesk, Inc.; UL and UL Certified are registered trademarks of UL LLC; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2025 AWI Licensing LLC

Design Considerations

For each design, the standard order quantity is 128 SF: four 2' × 4' panels or two 4' × 8' panels. Panels may be ordered as a single piece, however a minimum order quantity fee applies to any order under 128 SF.

Imagery with linear patterns may not align perfectly, panel to panel.

For optimal visual, product is best viewed at a distance.

Design & Pre-Construction Service

For complimentary design and pre-construction assistance, contact ProjectWorks® or visit armstrongceilings.com/projectworks

Cleaning and Disinfecting

Cleaning and CDC recommended disinfecting options available on armstrongceilings.com/cleaning

Seismic Restraint

Tectum Direct-Attach panels are approved for application in all seismic areas when installed per the seismic guidelines in the Armstrong Ceilings & Walls Installation Instructions.

Weight, Pcs and SF/Pallet

1" – 1.65 lbs/SF

