


TECTUM® DesignArt™ – Lines Tegular coarse texture



Tectum DesignArt – Lines Tegular ceiling panels in patterns TDLI-0011, TDLI-0012 and TDLI-0013 in Polar and Twilight

CAD/Revit® drawings at:
armstrongceilings.com/cadrevit



Visit our online pattern gallery at:
armstrongceilings.com/patterngallery

Mix and match Shapes and
Lines for a truly unique visual!



armstrongceilings.com/designart

Transform interior spaces with a three-dimensional visual by combining texture, routed patterns, and colors with sustainable, acoustical Tectum® DesignArt™ – Lines Tegular ceiling panels.

KEY SELECTION ATTRIBUTES

- 29 standard routed panels for 24" × 24" and 24" × 48" Tegular ceilings
- Available in 24 standard nature-inspired colors and Natural
- Precision routing of lines allows for seamless connections between compatible panel face designs
- Tectum DesignArt – Lines panels have UL® certified acoustics with testing and reporting that align with industry-wide best practices
- Color-coordinated suspension systems available
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim (standard colors only)
- Part of the Sustain® portfolio, and meeting the most stringent industry sustainability compliance standards today
- Touch up paint for 24 standard colors available
- Mold- and mildew-resistant surface
- Durable for heavy-use interiors
- All edges are painted
- USDA Biobased content: 98%
- Made in the U.S.A. of domestic and global content
- Build America, Buy America (BABA) Act compliant

DETAIL



Tectum DesignArt – Lines tegular panel. All edges are painted.



*Available in High NRC
with proprietary
acoustical backer!*

TECTUM® DesignArt™ – Lines

Regular
coarse texture



The mark of responsible forestry


USDA
CERTIFIED
BIOBASED
PRODUCT
PRODUCT 98%

SUSTAIN®
High Performance
Sustainable Ceiling Systems

Declare.


LEED V5

COMMON MATERIALS FRAMEWORK		Climate Health	EPD
Human Health	Declare Label	Ecosystem Health	EPD
	HPD		FSC®
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓

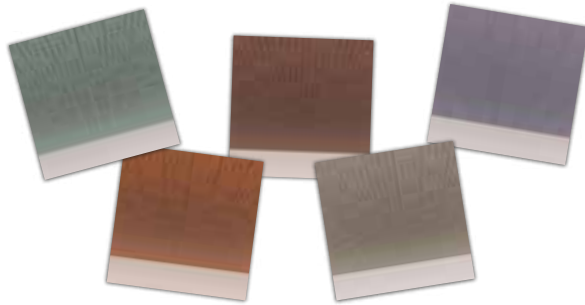

Visit our online pattern gallery at
armstrongceilings.com/patterngallery
Use our recommended colors, or choose
from 24 standard colors, in addition to Natural
to create your own one-of-a-kind pattern!

COLORS Due to printing limitations, shade may vary from actual product.

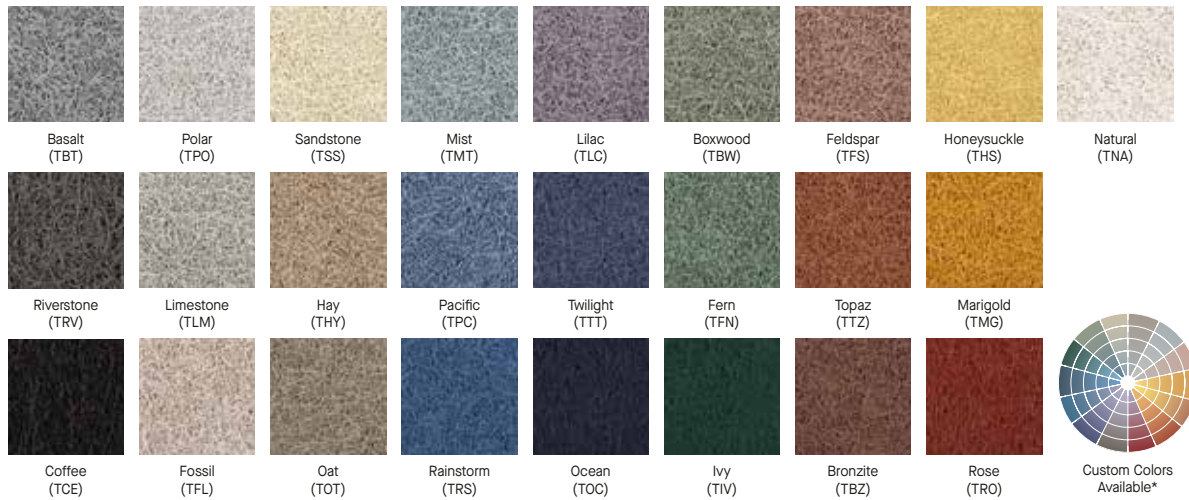

* For custom options contact ASQuote, ASQuote@armstrongceilings.com
Custom color panels and any panels greater than 1" thick are not included in Sustain® portfolio.

VISUAL SELECTION

Item No.	Dimensions W x L x H (Inches)
TECTUM® DesignArt™ – Lines 15/16" Square Regular	24 x 24 x 1" ☐ 24 x 48 x 1" ☐

PERFORMANCE

Dots represent high level of performance.

Fire Rating	Bio-Block	Humi-Guard+	Anti-Mold/Mildew	Sag Resist	Certified Low VOC Emissions	CleanAssure™ Disinfectable Panels	DURABILITY	30-Yr Warranty
Class A	*	*	*	*	*	*	Impact	*

ACOUSTICAL INFORMATION

Panel Thickness	Infill Panel Item No.	NRC	CAC
1"	N/A	0.40	N/A
1"	1713	0.90	30

TECTUM® DesignArt™ – Lines

Regular
coarse texture



The mark of
responsible forestry



SUSTAIN
High Performance
Sustainable Ceiling Systems

**USDA
CERTIFIED
BIOBASED
PRODUCT**
PRODUCT 98%

Declare.

LEED V5

COMMON MATERIALS FRAMEWORK

Human Health

Declare Label

HPD

3rd Party CDPH

Climate Health

Ecosystem Health

Circular Economy

Acoustics

EPD


EPD

FSC®


✓

✓


FACE PROFILES




Currents
8186D11T10




Rings
8186D04T10




Arcs
8186D03T10




Bands
8186D08T10




Steps
8186D07T10




Illusions
8186D09T10




Currents B
8186D49T10




Rings B
8186D45T10



Retro
8186D43T10




Retro B
8186D44T10




Bands B
8186D46T10




Bands C
8186D47T10




Illusions B
8186D48T10




Droplets
8186D13T10




Tilts
8186D15T10




Decos
8186D10T10




Signals
8186D14T10




Strings
8186D12T10




Droplets B
8186D51T10




Contours
8186D53T10




Tilts B
8186D40T10




Tilts C
8186D41T10




Tilts D
8186D42T10




Signals B
8186D52T10




Strings B
8186D50T10




Hatches
8186D01T10




Checkers
8186D06T10



Rays
8186D05T10



Levels
8186D54T10

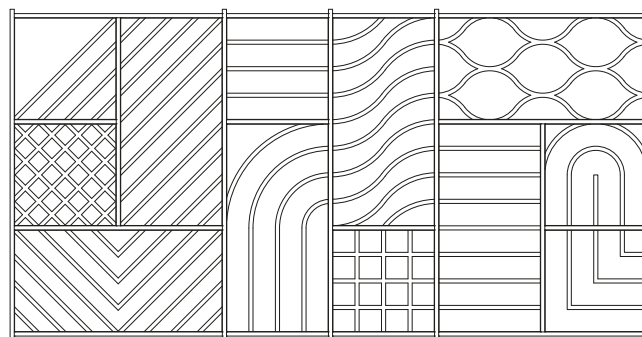

Precision Routing Allows for Mixing and Matching

◆ When specifying or ordering, include the appropriate 3-digit color suffix TNA = Natural; TPO = Polar (e.g. 8186D42T10 I P Q).

TechLine 877 276-7876

armstrongceilings.com/designart

Armstrong®
World Industries

TECTUM® WOOD FIBER – Standard



TECTUM® DesignArt™ – Lines

Tegular
coarse texture



The mark of
responsible forestry



Declare®

LEED V5

COMMON MATERIALS FRAMEWORK		Climate Health	EPD
Human Health	Declare Label	Ecosystem Health	EPD
	HPD		FSC®
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓

SYSTEM INSTALLATION DETAILS

	Item No. ♦	Description	Quantity
Suspension Systems	7301 _ _ _	Prelude® XL® 15/16" 12' HD Main Beam	20 PCS/CTN
	7300 _ _ _†	Prelude XL 15/16" 12' ID Main Beam	20 PCS/CTN
	XL7342 _ _ _†	Prelude 4' Cross Tee	60 PCS/CTN
	XL7328 _ _ _†	Prelude 2' Cross Tee	60 PCS/CTN
Wall-to-Wall	7800 _ _ _†	12" Hemmed Angle Molding	30 PCS/CTN
Floating Cloud Installations	AX__STR____	Axiom® Classic Straight Perimeter Trim	Per piece
Other Accessories	5456GAL1 _ _ _	Touch up paint††	1 gallon
	8178T10	Tectum® Hold-down Clip†††	200 PCS/CTN


♦ When specifying or ordering, include the appropriate 3-digit color suffix TNA = Natural; TPO = Polar (e.g. 5456GAL1 T P Q). Consult installation instructions for fastener guidance.

† 15/16" Prelude XL Suspension System available in coordinating colors to Tectum DesignArt. For the appropriate 3-digit color suffix, please visit armstrongceilings.com/suspensionssystems


†† Touch up paint is available to paint screw heads in field if desired or specified.

††† Tectum hold-down clip should be used in high impact spaces (such as gymnasiums) and will limit accessibility. One clip is required for each 2' x 2' panel and 2 clips are required for each 2' x 4' panel.


SYSTEM INSTALLATION DETAILS

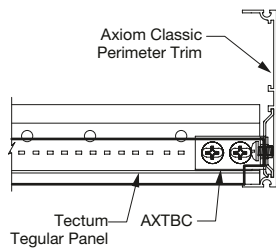

① Discontinuous system using Axiom trim solutions

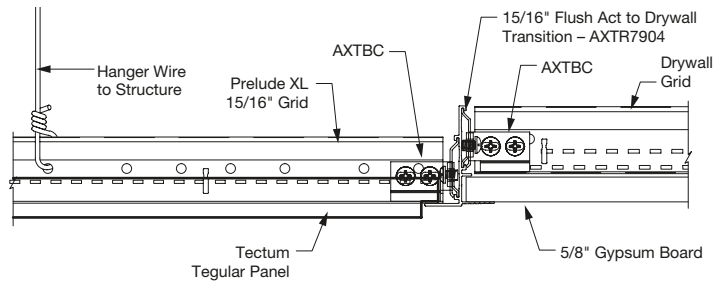

② Transitions with Axiom

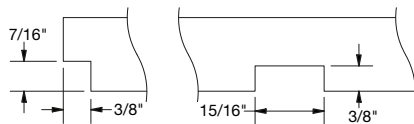

③ Routing for Lines with Tegular Edge

ACOUSTICAL INFILL PANELS

Item No.	Description	Dimensions	Color	PCS/CTN
1713	School Zone® Fine Fissured Lay-in Acoustical Panel	24 x 24 x 3/4"	White	12

PHYSICAL DATA

Material

FSC® certified (FSC® C007626)

Cementitious Wood Fiber; FSC® certified. For more information about FSC-certified fire-retardant products, or to view our FSC certification letter, contact TechLine at 1 877 276 7876.

Surface Finish

Factory-applied latex paint on abuse-resistant silicate surface coating. Natural finish is unpainted, but after the coating is applied, panels may appear light in color.

Panels are painted on the edge, however due to fibrous texture of panels, certain angles and lighting conditions will make edge appear less or more painted.

Can be field painted up to 6 times without impacting acoustic or fire performance. See installation instructions for details on paint and application method.

Fire Performance

Class A. Flame Spread Index 25 or less and Smoke Developed Index 50 or less when tested in accordance with ASTM E84.

CAN/ULC S102 surface burning characteristics. Flame Spread Index of 25 or less and Smoke Developed Index of 50 or less (painted, face only).

Humidity/Sag Resistance

HumiGuard® Plus panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

Anti-Mold/Mildew

Ceiling panels with BioBlock® performance resist the growth of mold and mildew on the panel surface.

VOC Emissions

Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard®, CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

Primary (Embodied) Energy

See all LCA information on our EPDs.

Application Considerations

Low angle lighting exaggerates variation inherent to the manufacturing process and is not recommended for Tectum installations.

Design Considerations

Color variation among panels is common due to the natural characteristics of the wood.

Wood fibers may appear orange on natural-colored panels due to the characteristics of the wood.

Physical product samples for standard and custom colors are available upon request. Please refer to the physical product sample prior to making a final selection. While we strive to ensure exact color matches, various factors such as differences in materials, texture, substrate porosity, painting processes, lighting, and observer subjectivity can all affect how paint colors appear on ceiling and wall panels, suspension systems, and trim products. Due to these and other differences, ceiling and wall panels, trim products, and suspension systems with the same color name will coordinate but may not be an exact color match.

Product is dye-lotted. Order sufficient initial quantities and attic stock to minimize possible color variation.

Installation Considerations

Use caution and wear appropriate hand, eye, and dust mask protection when cutting and installing Tectum panels. Refer to installation instructions for complete details and cutting recommendations.

Specification Consideration

FSC-certified panels available upon request.

Attention: For FSC-certified wood products to maintain their CoC certification, products must be sold to a CoC-certified distributor or directly to the installing contractor. Failure to do so breaks the CoC.

Seismic Restraint

Tectum Tegular panels are approved for application in all seismic areas when installed per the Armstrong® installation instructions.

Design & Pre-Construction Service

For complimentary design and pre-construction assistance, contact ProjectWorks® or visit armstrongceilings.com/projectworks

Cleaning and Disinfecting

Cleaning and CDC-recommended disinfecting options available on armstrongceilings.com/cleaning

Warranty

30-Year Performance Guarantee & Warranty when installed with an Armstrong suspension system. Details at armstrongceilings.com/warranty

Weight; Square Feet/Carton

1" – 1.65 LBS/SF

Panels sold by the carton (8 PCS/CTN). Other accessories and suspension elements quantities noted above.