


TECTUM® Direct-Attach  
TECTUM Direct-Attach  
High NRC  
Acoustical Wall Panels  
coarse texture



Tectum Direct-Attach wall panels in custom colors

CAD/Revit® drawings at:  
armstrongceilings.com/cadrevit



Tectum® Direct-Attach and Direct-Attach High NRC wall panels provide durable, sustainable, acoustical options for a wide variety of applications.

KEY SELECTION ATTRIBUTES

- Tectum Direct-Attach panels have an NRC of up to 1.00 and UL® Certified acoustics with acoustical testing and reporting that align with industry-wide best practices
- Tectum Direct-Attach High NRC panels have a proprietary, factory-applied acoustical backer, adding sound absorption that is certified by UL
- Select products included in the FAST134 program – ready to ship in 4 weeks or less
- **new** All panel thicknesses (1", 1-1/2", and 2") are now part of the Sustain® portfolio and meet the most stringent industry sustainability compliance standards today. Listed colors and custom sizes are included.
- Long and short beveled edges are available as a standard option
- Great retrofit solution for noise reduction
- Can be field painted up to 6 times without impacting acoustic or fire performance
- Variety of premium color options available
- Can be mechanically fastened to a wide variety of surfaces including masonry and drywall
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim (standard colors only)
- USDA Biobased Content: 98%
- Made in the U.S.A. of domestic and global content
- Build America, Buy America (BABA) Act compliant

DETAILS



1. Tectum Direct-Attach panel in White
2. Tectum Direct-Attach panels in White
3. Tectum Direct-Attach High NRC proprietary acoustical backer


TECTUM® Direct-Attach  
TECTUM Direct-Attach  
High NRC  
Acoustical Wall Panels  
coarse texture



COMMON MATERIALS FRAMEWORK		Climate Health	EPD
Human Health	Declare Label HPD	Ecosystem Health	EPD
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓

TECTUM DESIGN CAPABILITIES

**COLORS** Due to printing limitations, shade may vary from actual product.

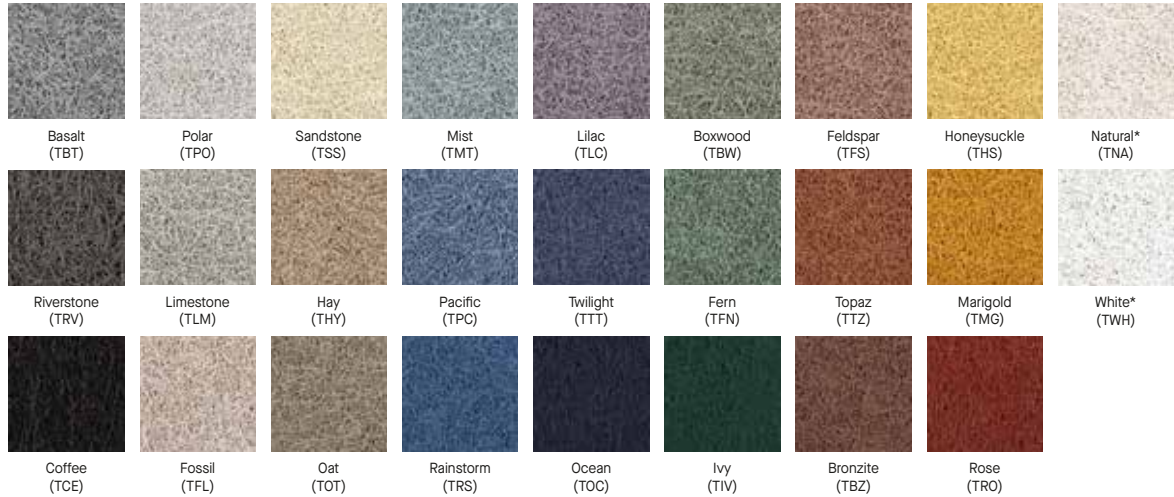

\* Standard color options; Nature-inspired colors are premium. All colors shown are pre-qualified to meet Sustain® portfolio requirements.

\*\* Custom, made-to-order colors must be evaluated if sustainability criteria is required. Lead time will increase. Contact ASQuote@armstrongceilings.com

QUOTED PANEL SIZES

Get Tectum Direct-Attach panels in sizes up to 144"	1", 1-1/2", or 2" Thickness	
	Width	Length
	12" - 48"	12" - 144"

HIGH DESIGN IN STANDARD PRODUCTS A New Way to Think About Tectum



**Tectum® DesignArt®**  
Mix and match Shapes and Lines for a truly unique visual!  
[armstrongceilings.com/designart](http://armstrongceilings.com/designart)



**Tectum® Create!™**  
Create beautiful, unique spaces with printed imagery!  
[armstrongceilings.com/tectumcreate](http://armstrongceilings.com/tectumcreate)



**Tectum® Direct-Attach Ceilings**  
Transform your spaces with strength and style!  
[armstrongceilings.com/tectumdirect](http://armstrongceilings.com/tectumdirect)



# TECTUM® Direct-Attach TECTUM Direct-Attach High NRC Acoustical Wall Panels coarse texture



LEED V5

COMMON MATERIALS FRAMEWORK		Climate Health	EPD
Human Health	Declare Label	Ecosystem Health	EPD
	HPD		FSC
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓

## VISUAL SELECTION

Item No. ◆	Dimensions W × L × H (Inches)
TECTUM® Direct-Attach Wall Panels (FSC® Certified) Long Edges Beveled/ Short Edges Square	8182T10_ _ _ 23-3/4 × 48 × 1" 8182T15PC1_ _ _ 23-3/4 × 48 × 1-1/2" 8182T20PC1_ _ _ 23-3/4 × 48 × 2"
	8181T10_ _ _ 23-3/4 × 96 × 1" 8181T15PC1_ _ _ 23-3/4 × 96 × 1-1/2" 8181T20PC1_ _ _ 23-3/4 × 96 × 2"
	8180T10_ _ _ 47-3/4 × 96 × 1" 8180T15PC1_ _ _ 47-3/4 × 96 × 1-1/2" 8180T20PC1_ _ _ 47-3/4 × 96 × 2"
Quoted Panel Sizes	W 12" – 48" L: 12" – 144" 1", 1-1/2", or 2" thickness
TECTUM® Direct-Attach Wall Panels (FSC® Certified) Long Edges Beveled/ Short Edges Beveled**	8175T10_ _ _ 23-3/4 × 48 × 1" 8175T15PC1_ _ _ 23-3/4 × 48 × 1-1/2" 8175T20PC1_ _ _ 23-3/4 × 48 × 2"
	8174T10_ _ _ 23-3/4 × 96 × 1" 8174T15PC1_ _ _ 23-3/4 × 96 × 1-1/2" 8174T20PC1_ _ _ 23-3/4 × 96 × 2"
	8173T10_ _ _ 47-3/4 × 96 × 1" 8173T15PC1_ _ _ 47-3/4 × 96 × 1-1/2" 8173T20PC1_ _ _ 47-3/4 × 96 × 2"
Quoted Panel Sizes	W 12" – 48" L: 12" – 144" 1", 1-1/2", or 2" thickness

## PERFORMANCE

Dots represent high level of performance.

Fire Rating	Light Reflect	Bio-Block	Humi-Guard+	Anti-Mold/Mildew	Sag Resist	Certified Low VOC Emissions	CleanAssure™ Disinfectable Panels		DURABILITY			30-Yr Warranty
							Fog	Impact	Scratch*	Scratch*	Scratch*	
Class Up to A	Up to 0.75	*	*	*	*	*	*	*	*	*	*	*
Class Up to A	Up to 0.75	*	*	*	*	*	*	*	*	*	*	*
Class Up to A	Up to 0.75	*	*	*	*	*	*	*	*	*	*	*
Class Up to A	Up to 0.75	*	*	*	*	*	*	*	*	*	*	*
Class Up to A	Up to 0.75	*	*	*	*	*	*	*	*	*	*	*
Class Up to A	Up to 0.75	*	*	*	*	*	*	*	*	*	*	*
Class Up to A	Up to 0.75	*	*	*	*	*	*	*	*	*	*	*
Class Up to A	Up to 0.75	*	*	*	*	*	*	*	*	*	*	*
Class Up to A	Up to 0.75	N/A	N/A	*	*	*	*	*	*	*	*	*
Class Up to A	Up to 0.75	*	*	*	*	*	*	*	*	*	*	*
Class Up to A	Up to 0.75	*	*	*	*	*	*	*	*	*	*	*
Class Up to A	Up to 0.75	*	*	*	*	*	*	*	*	*	*	*
Class Up to A	Up to 0.75	*	*	*	*	*	*	*	*	*	*	*
Class Up to A	Up to 0.75	*	*	*	*	*	*	*	*	*	*	*
Class Up to A	Up to 0.75	*	*	*	*	*	*	*	*	*	*	*
Class Up to A	Up to 0.75	*	*	*	*	*	*	*	*	*	*	*
Class Up to A	Up to 0.75	*	*	*	*	*	*	*	*	*	*	*
Class Up to A	Up to 0.75	N/A	N/A	*	*	*	*	*	*	*	*	*

## ACOUSTICAL INFORMATION

Panel Thickness	UL Classified Acoustics NRC	Mounting Method
1"	0.40	A
	0.45	D-20
	0.80	C-20
	0.85	C-40
1-1/2"	0.50	A
	0.55	D-20
	0.90	C-20
	0.90	C-40
2"	0.65	A
	0.70	D-20
	0.95	C-20
	1.00	C-40



FAST134 program items ready to ship from manufacturer in 4 weeks or less.  
Up-to-date lead times and product options (sizes and colors) at [armstrongceilings.com/fast134](http://armstrongceilings.com/fast134)

◆ When specifying or ordering, include the appropriate 3-digit color suffix:  
(e.g. 8182T10TNA – Direct-Attach Wall Panels with Long Edges Beveled/Short Edges Square – 23-3/4 × 48 × 1" in Natural)  
\* Scratch-resistance is applicable to Natural and White panels only.  
\*\* Four-sided beveled edge panels are recommended in adjoining panel installations.



TECTUM® Direct-Attach  
TECTUM Direct-Attach  
High NRC  
Acoustical Wall Panels  
coarse texture



LEED V5	
COMMON MATERIALS FRAMEWORK	Climate Health <b>EPD</b>
Human Health <b>Declare Label</b>	Ecosystem Health <b>EPD</b>
	HPD <b>FSC</b>
	3rd Party CDPH <b>✓</b>
OCCUPANT EXPERIENCE	Acoustics <b>✓</b>

VISUAL SELECTION

Item No. ◆	Dimensions W x L x H (Inches)
TECTUM Direct-Attach High NRC Wall Panels	5338W2L04T10_ _ _ 23-3/4 x 48 x 1"
	5338W2L08T10_ _ _ 23-3/4 x 96 x 1"
Long Edges Beveled/Short Edges Square	5338W4L04T10_ _ _ 47-3/4 x 48 x 1"
	5338W4L08T10_ _ _ 47-3/4 x 96 x 1"
<b>Quoted Panel Sizes</b>	W 12" - 48" L: 12" - 144" 1", 1-1/2", or 2" thickness

◆ When specifying or ordering, include the appropriate 3-digit color suffix:  
(e.g. 5338W2L04T10TNA - Direct-Attach High NRC Wall Panels with Long Edges Beveled/Short Edges Square - 23-3/4 x 48 x 1" in Natural)  
\* Scratch-resistance is applicable to Natural and White panels only.

PERFORMANCE Dots represent high level of performance.

Fire Rating	Light Reflect	Anti-Mold/Mildew	Sag Resist	Certified Low VOC Emissions	CleanAssure™ Disinfectable Panels	Fog	Impact	Scratch*	30-Yr Warranty
Class Up to A	Up to 0.75	•	•	•	•	•	•	•	•
Class Up to A	Up to 0.75	•	•	•	•	•	•	•	•
Class Up to A	Up to 0.75	•	•	•	•	•	•	•	•
Class Up to A	Up to 0.75	N/A	N/A	•	•	•	•	•	•

ACOUSTICAL INFORMATION

Panel Thickness	UL Classified Acoustics NRC	Mounting Method
1" High NRC	0.60	D-20
	0.85	E-400


ACCESSORIES

Item No. ◆	Description	Quantity
5456GAL1_ _ _	Touch up paint	1 gallon
8187L16TWH†	#6 x 1-5/8" Painted Head - Sharp point Screws	1000/CTN
8187L22TWH†	#8 x 2-1/4" Painted Head - Sharp point Screws	1000/CTN
8187L30TWH†	#8 x 3" Painted Head - Sharp point Screws	1000/CTN
8188L16TWH†	#6 x 1-5/8" Painted Head - Drill point Screws	1000/CTN
8188L23TWH†	#6 x 2-1/4" Painted Head - Drill point Screws	1000/CTN
8188L30TWH†	#8 x 3" Painted Head - Drill point Screws	1000/CTN
8189L22TWH†	1/4" x 2-1/4" Painted Head - CMU Screws	500/CTN
8189L27TWH†	1/4" x 2-11/16" Painted Head - CMU Screws	500/CTN
8189L32TWH†	1/4" x 3-1/4" Painted Head - CMU Screws	100/CTN


NOTE: Projects may require alternative screw lengths and types depending on site conditions. Please consult installation instructions for guidance.  
◆ When specifying or ordering, include the appropriate 3-digit color suffix:  
(e.g. 5456GAL1TNA - Touch up paint in Natural)  
† Touch up paint is available to paint screw heads in field if desired or specified.

ACOUSTICAL MOUNTING METHODS


Mounting A




Mounting D-20



Mounting C-20



Mounting C-40

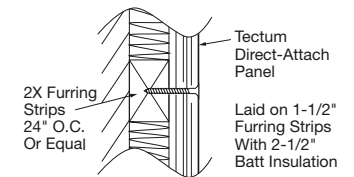

# TECTUM® Direct-Attach TECTUM Direct-Attach High NRC Acoustical Wall Panels coarse texture


USDA  
CERTIFIED  
BIOBASED  
PRODUCT  
PRODUCT 95%



LEED V5

COMMON MATERIALS FRAMEWORK		Climate Health	EPD
Human Health	Declare Label	Ecosystem Health	EPD
	HPD		FSC
	3rd Party CDPH	Circular Economy	✓
OCCUPANT EXPERIENCE		Acoustics	✓

## EDGE DETAIL

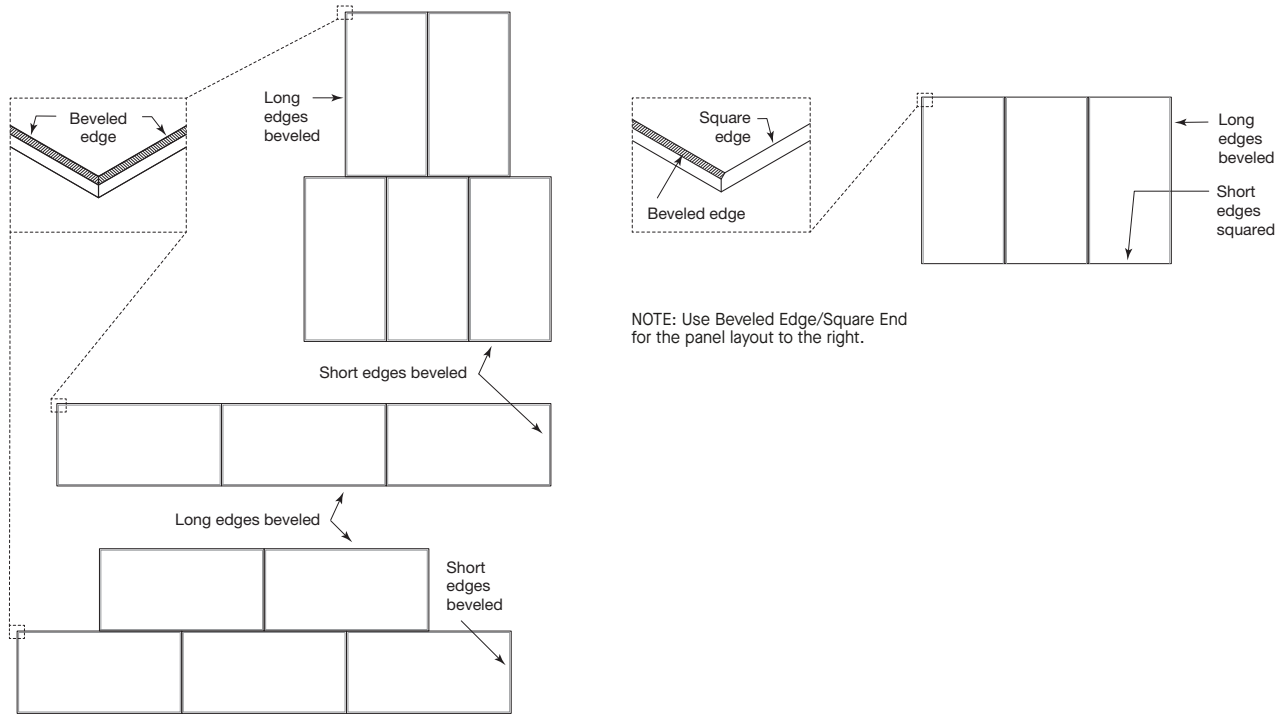

NOTE: Use Beveled Edge/Beveled End panels for all adjoining panel installations.

## PHYSICAL DATA

### Material

Cementitious Wood Fiber; Tectum High NRC panels have an acoustical fleece.

### Surface Finish

Factory-applied latex paint on abuse-resistant silicate surface coating. Natural finish is unpainted, but after the coating is applied, panels may appear light in color.

Panels are painted on the edge, however due to fibrous texture of panels, certain angles and lighting conditions will make edge appear less or more painted.

Can be field painted up to 6 times without impacting acoustic or fire performance. See installation instructions for details on paint and application method.

### Fire Performance

Class A. Flame Spread Index 25 or less and Smoke Developed Index 50 or less when tested in accordance with ASTM E84.

### VOC Emissions

Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard®, CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

### Humidity/Sag Resistance

HumiGuard® Plus performance panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

### Anti-Mold/Mildew

Ceiling panels with BioBlock® performance resist the growth of mold and mildew on the panel surface.

### Installation Considerations

Panels must be mechanically attached to approved substrate per installation instructions. To achieve proper finished visual, panels should be installed in an ashlar pattern. Four-sided beveled edge panels are recommended in adjoining panel installations.

Use caution and wear appropriate hand, eye, and dust mask protection when cutting and installing Tectum panels. Refer to installation instructions for complete details and cutting recommendations.

### Primary (Embodied) Energy

See all LCA information on our EPDs.

### Application Considerations

Color variation among panels is common due to the natural characteristics of the wood on White and Natural panels.

Wood fibers may appear orange on natural-colored panels due to the characteristics of the wood.

### Design Considerations

For walls that may experience condensation or moisture, such as uninsulated exterior walls, D- or C- mounting is required to create a gap between the structure and the panel.

### Cleaning and Disinfecting

Cleaning and CDC-approved disinfecting options available on [armstrongceilings.com/cleaning](http://armstrongceilings.com/cleaning)

### Seismic Restraint

Tectum Direct-Attach panels are approved for application in all seismic areas when installed per the seismic guidelines in the Armstrong Ceilings & Walls Installation Instructions.

### Warranty

30-Year Warranty. Details at [armstrongceilings.com](http://armstrongceilings.com)

### FAST134 Program Considerations

Size of Job Matters: Big jobs over 2500 SF, or 50 pieces for shapes/vertical elements, will have longer lead times.

Location Matters: Transit time not included. We are ready to ship in 1 week on FAST1 items. However, transit to the states west of Wyoming may add time.

Distributor Truck Schedule Matters: We rely on distribution to help move products around the country. When speed matters, work with your local distributor to ensure FAST134 service.

Stock vs Made-to-Order Matters: FAST3 & FAST4 items are made-to-order and will ship direct to distributor. FAST1 (stocked items) will go through distribution and depend on distributor truck schedules.

### Weight, Pcs and SF/Pallet

1" - 1.65 LBS/SF  
1-1/2" - 2.53 LBS/SF  
2" - 3.3 LBS/SF  
8180T10, 8173T10 - 36 pcs/pallet; 1,152 SF/pallet  
8181T10, 8174T10 - 72 pcs/pallet; 1,152 SF/pallet  
8182T10, 8175T10 - 72 pcs/pallet; 572 SF/pallet  
8174T15, 8181T15 - 48 pcs/pallet; 768 SF/pallet  
8175T15, 8182T15 - 48 pcs/pallet; 384 SF/pallet  
8173T20, 8180T20 - 18 pcs/pallet; 576 SF/pallet  
8174T20, 8181T20 - 36 pcs/pallet; 576 SF/pallet  
8175T20, 8182T20 - 36 pcs/pallet; 288 SF/pallet  
5338W4L08T10, 5338W4L04T10, 5338W2L08T10, 5338W2L04T10 - sold by the piece

LEED® is a registered trademark of the U.S. Green Building Council; Declare® and Living Building Challenge® (LBC) are registered trademarks of the International Living Future Institute; WELL™ and WELL Building Standard® are trademarks of the International WELL Building Institute; Revit® is a registered trademark of Autodesk, Inc.; FSC® is a registered trademark of Forest Stewardship Council®, A.C., license code FSC-C007626; UL® is a registered trademark of UL LLC; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2026 AWI Licensing LLC

TechLine / 877 276-7876  
[armstrongceilings.com/tectum](http://armstrongceilings.com/tectum)  
BPCS-5716-126

**Armstrong®**  
World Industries



PARTITIONS & WALLS