

WOODWORKS® Linear


Veneered Panels



FAST 134
Select Items Ship Fast
armstrongceilings.com/fast134



CAD/Revit® drawings at:
armstrongceilings.com/cadrevit

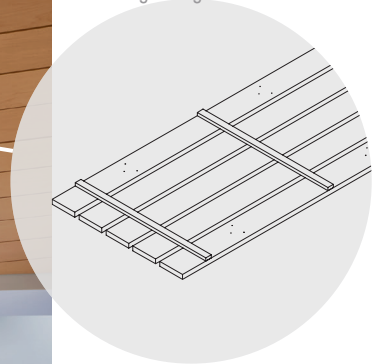

plus capabilities
to do more



armstrongceilings.com/capabilities
See more photos at:
armstrongceilings.com/photogallery

▲ WoodWorks® Linear Veneer panels

These unique tapered or traditional wood panels offer a variety of linear looks.

KEY SELECTION ATTRIBUTES

- new** Integrate linear lights seamlessly with the Integrated Light Connection Clip and lights from Backlight srl and XAL®
- Panels in nominal 4" or 6" widths
- CleanAssure™ family of products – includes disinfectable panels, suspension systems, and trim
- new** Hook-on panels (for Heavy-Duty Prelude® XL® 15/16" suspension system) provide safe and secure downward accessibility
- Select products included in the FAST134 program – ready to ship in 4 weeks or less
- Complete standard system from one manufacturer (suspension system/ panels/trim)
- Factory-edge banded for superior quality
- USDA Biobased content: 100%
- BioAcoustic™ infill available for increased acoustical performance

VENEERS Due to printing limitations, shade may vary from actual product.

Natural Variations™ (Real Wood Veneers)




Constants™ (Real Wood Veneers)



Custom Veneers and
Finishes Available
(extended lead times)

*Now, Lighting
Integration
Made Easy*

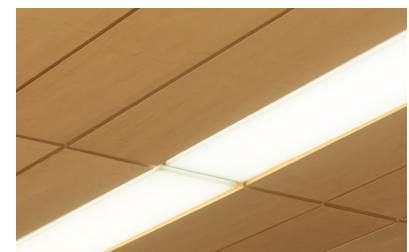

WoodWorks® Linear Veneered panels in Maple with 5-1/4" x 95" linear light fixture. Integration details at armstrongceilings.com/linearlighing

WOODWORKS® Linear

Veneered Panels



LEED® WELL | LBC

UP TO 63% RECYCLED CONTENT

energy management
construction waste mgmt
regional materials
design for flexibility
EPD

recyclable/extended producer resp.
biobased materials
FSC® (for wood)
recycled content
sourcing of raw materials
material ingredient reporting
low emitting materials
lighting quality
acoustics

LOCATION DEPENDENT

For LEED contribution contact TechLine

VISUAL SELECTION

Item No. ♦	Description	Dimensions Nominal W x L x H (Inches) Custom Sizes Available	
6690W1 ___	Nominal 4" wide planks	24 x 96 x 3/4"	<input type="text"/>
6691W1 ___	Nominal 6" wide planks	24 x 96 x 3/4"	<input type="text"/>
6692W1 ___	Tapered planks	24 x 96 x 3/4"	<input type="text"/>

PERFORMANCE


Fire Rating	Acoustics NRC*	CleanAssure™ Disinfectable Panels		
		Fog	Spray	Wipe
Class A	0.45	•	•	•
Class A	0.20	•	•	•
Class A	0.20	•	•	•



FAST134 program items ready to ship from manufacturer in 4 weeks or less.
Up-to-date lead times and product options (sizes and colors) at armstrongceilings.com/fast134

♦ When specifying or ordering, include the appropriate 3-letter color suffixes.
NOTE: Veneers and sizes available as special order; call TechLine at 1 877 276-7876.

* NRC achieved with BioAcoustic™ infill panel.



PHYSICAL DATA

Material
FSC® certified fire-retardant particle board with face-cut veneers (RA-COC-003601). For more information about FSC certified products, or to view our FSC certification letter, visit armstrongceilings.com/woodworksfsc

Surface Finish
Clear or tinted semi-gloss coating

Fire Performance
Class A: ASTM E84 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less.
CAN/ULC S102 surface burning characteristics. Flame Spread Rating 25 or less. Smoke Developed Classification 50 or less.

ASTM E1264 Classification
Type XX; Pattern: Z; Class A

Application Considerations
Variation among panels may occur due to the natural characteristics of the wood and grain.
Use of large wood panels may result in deflection and cause alignment inconsistency due to size and ambient conditions.

It is very important that WoodWorks panels are climatized prior to installation. Relative humidity between 25% and 55%, and temperatures between 50°F and 86°F, must be maintained throughout the life of the product.

Design Considerations
Cloud installations with total panel width less than 6' wide are not recommended.
Cloud installations must be at least two panels in length so that the short ends of panels interfacing with the trim can be installed with the open side of the hooks facing the perimeter. See installation instructions for details.

Specification Consideration
Attention: For FSC certified wood products to maintain their CoC certification, products must be sold to a CoC-certified distributor or directly to the installing contractor. Failure to do so breaks the CoC.

Seismic Restraint
WoodWorks Linear panels have been engineered, tested, and approved for application in all seismic areas when installed per Armstrong Ceilings installation instructions.

Cleaning and Disinfecting
Cleaning and CDC approved disinfecting options available on armstrongceilings.com/cleaning

FAST134 Program Considerations
Size of Job Matters: Big jobs, over 2500 SF or 50 pieces for shapes/vertical elements will have longer lead times.
Location Matters: Transit time not included. We are ready to ship in 1 week on FAST1 items. However, transit to the states west of Wyoming may add time.
Distributor Truck Schedule Matters: We rely on distribution to help move products around the country. When speed matters, work with your local distributor to ensure FAST134 service.
Stock vs Made-to-Order Matters: FAST3 & FAST4 items are made-to-order and will ship direct to distributor. FAST1 (stocked items) will go through distribution and depend on distributor truck schedules.

Warranty
Details at armstrongceilings.com/warranty

Weight
2.75 lbs/SF; bulk-packaged per order. Suspension system, hardware, and accessories ordered separately.
6690,6691 – 2.49 lbs/SF
6692 – 2.75 lbs/SF

WOODWORKS® Linear

Veneered Panels

USDA
CERTIFIED
BIOBASED
PRODUCT
PRODUCT 100%



LEED® WELL™ LBC
UP TO 63% RECYCLED CONTENT

energy management
construction waste mgmt
regional materials
design for flexibility
EPD
recyclable/extended producer resp.
biobased materials
FSC® (for wood)
recycled content
sourcing of raw materials
material ingredient reporting
low emitting materials
lighting quality
acoustics

LOCATION DEPENDENT

For LEED contribution contact TechLine

WITH INFILL PANEL


INSTALLATION ACCESSORIES

Item No. ♦	Description	Dimensions Nominal W x L x H (Inches)	Colors	Pcs./ Ctn.	Item No. ♦	Description	Dimensions Nominal W x L x H (Inches)	Colors	Pcs./ Ctn.
8200T10	Fiberglass Infill Panel	24 x 24 x 1"	Black	12	6408_ _ _	Edge Banding	300" x 3/4"	Standard Veneers	1
5479	BioAcoustic™ Infill Panel	24 x 24 x 5/8"	Beige	12	7891	12-Gauge Hanger Wire	144" Length	–	140
5823	BioAcoustic Infill Panel	24 x 24 x 5/8"	Black (Matte)	12	♦ When specifying or ordering, include the 3-letter color suffix that coordinates with your WoodWorks ceiling (e.g., 6408 N M P) ** Trim cartons include FXTBC Clips and FX4SPUCE Splice Plates.				

SUSPENSION SYSTEMS

When ordering suspension system materials, please note that this product requires Prelude® XL® HD (Heavy-duty) 15/16" main beams and 2' cross tees that are full height (1-11/16"). Both suspension system components should be specified in Tech Black (BL).

Item Number	Description	Dimensions (Inches)	Pieces/Carton
5986	T-Bar Hook†	Nominal 4 x 2 x 3"	50
7123PKG300	Wood Screws	5/8"	300/Pkg
6091	Safety Cable	24" x 3/32"	50 (2 required per panel)
SH12	Support Hanger	144" x 2"	12

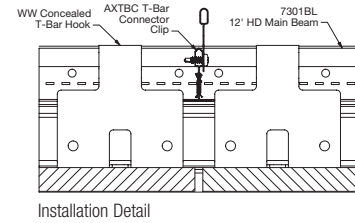

† For 24" x 96" panel, install eight hooks. NOTE: Three screws per hook.
 NOTE: Refer to installation instructions at armstrongceilings.com/installation for a better understanding of suspension system requirements.

INFILL PANELS

Item Number	Description	Dimensions (Inches)	NRC	CAC	Colors	Pieces/Carton
5479	BioAcoustic Infill Panel	24 x 24 x 5/8"	0.75	N/A	Beige Matte	12
5823	BioAcoustic Infill Panel	24 x 24 x 5/8"	0.75	N/A	Black Matte	12
8200T10	Fiberglass Infill Panel	24 x 24 x 1"	0.80	N/A	Black Gloss	12

INFILL PANEL OPTIONS



1. BioAcoustic Infill Panel 5823 – Black
2. BioAcoustic Infill Panel 5479 – Beige
3. 1" Fiberglass Infill Bag 8200T10

TechLine / 1 877 276-7876
armstrongceilings.com/woodworkslinear
 BPCS-5126-1122

LEED® is a registered trademark of the U.S. Green Building Council; Living Building Challenge® (LBC) is a registered trademark of the International Living Future Institute®; WELL™ and WELL Building Standard™ are trademarks of the International WELL Building Institute; Revit® is a registered trademark of Autodesk, Inc.; XAL® is a registered trademark of XAL GmbH; Backlight srl is a registered trademark of BACKLIGHT srl; FSC is a registered trademark of Forest Stewardship Council®, A.C., license code FSC-C007626; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2023 AWI Licensing LLC



WOODWORKS® – Standard

LIGHTING SOLUTIONS WOODWORKS® Linear

Linear Lighting
veneered panels



▲ WoodWorks® Linear Veneered panels in Maple with 5-1/4" x 95" linear light fixture

Seamlessly integrate linear light fixtures from Backlight srl and XAL® with standard or made-to-order WoodWorks® Linear Veneered panels using Integrated Light Connection Clips that suspend lights directly from the suspension system. This eliminates the need for independent support of the fixture or modification of the suspension system.


KEY SELECTION ATTRIBUTES

- Engineered and tested clip and suspension system seamlessly integrate lighting with grid
- Low-profile, pre-engineered light fixture in coordinating 3-1/4" and 5-1/4" widths from Backlight srl and XAL for a flush, sleek visual
- Approved for use in all seismic categories

DESIGN CONSIDERATIONS


- Length of lights are designed to coordinate with the length of panels
- Lights must run parallel with panel direction and are not for use in perimeter panels
- Reveal between light and panels will coordinate with the reveal from panel to panel
- Coordination between ceiling contractor and electrician is required for installation

VISUAL SELECTION

Item No.	Description	Coordinating WoodWorks Linear Veneered Panel Item No.	Panel Field Modification Required*	Compatible Partner Light Fixture Dimensions W x L (Inches)	Clips Required per Light Fixture
WoodWorks Linear Veneered Panels	8171WLVP01 	6690W1 6691W1	Remove 1 plank Remove 1 plank	3-1/4" x 95.25" 5-1/4" x 95.75"	4 4

* Made-to-order panels that eliminate the need for field modification of standard panels are available via ASQuote@armstrongceilings.com
NOTE: Item 8171WLVP01 is packaged 12 pcs/ctn

INSTALLATION DETAILS

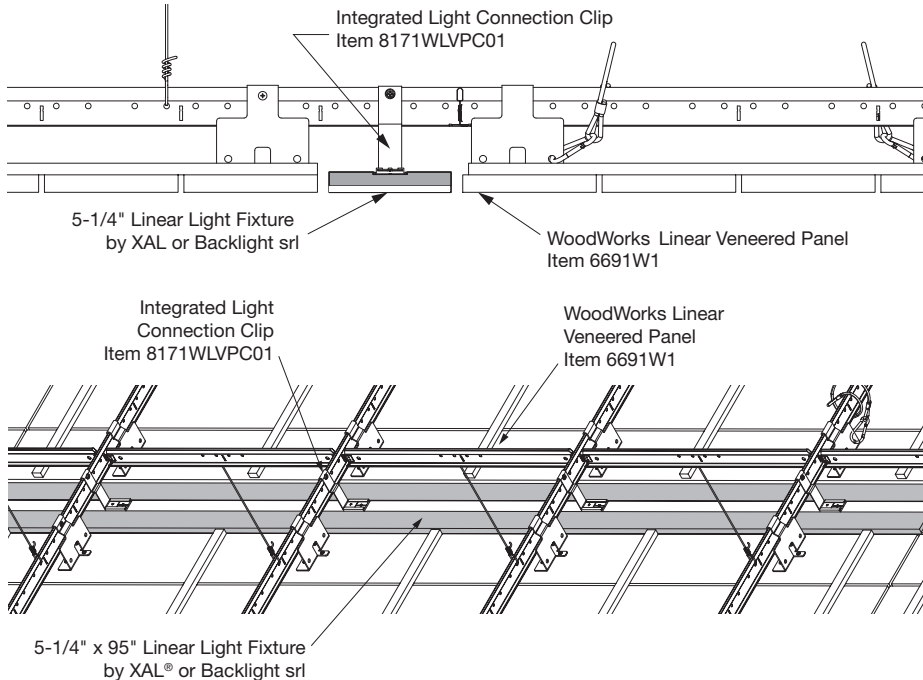

LIGHTING FIXTURES

Compatible with Backlight srl CHIARO light fixture and XAL® PANO Low-Profile Linear Plank light fixture



For detailed lighting information, contact your local Backlight srl or XAL representative.