

NOTE: FOR USE ON SLOPES 2:12 OR LESS.
 NOTE: REQUIRES FLOATING RIDGE, SHEDRIDGE, HEADWALL, AND HIP.

Legend

As Supplied By ATAS:


- 1 - ATAS FLS Panel
- 2 - Anchor Clips
- 4 - Painted Pop Rivets
- 5 - Eave Trim


As Supplied By Others:

- A - 30# (Minimum) Felt with Rosin Paper
- A1 - 40 MIL Ice & Water Shield
- B - Top of Roof Deck or Insulation
- C - Structurals
- D - Trim Boards
- E - #12 x 1" Wafer Head Screws
- E1 - #12 x 1-1/4" Hex Head Screws
- F - Fascia Trim (May be fabricated/supplied by ATAS upon request).
- G - Appropriate anchor screws sufficiently long enough to fully penetrate the solid substrate (Some types/styles available from ATAS.)
- L - Plywood
- U - Butyl Tape Sealant
- WS - Wood Shim
- * - Indicates color side.

Field Lock
 Fixed Eave Detail
 w/ Wall Panel

Scale: 3" = 1'-0"

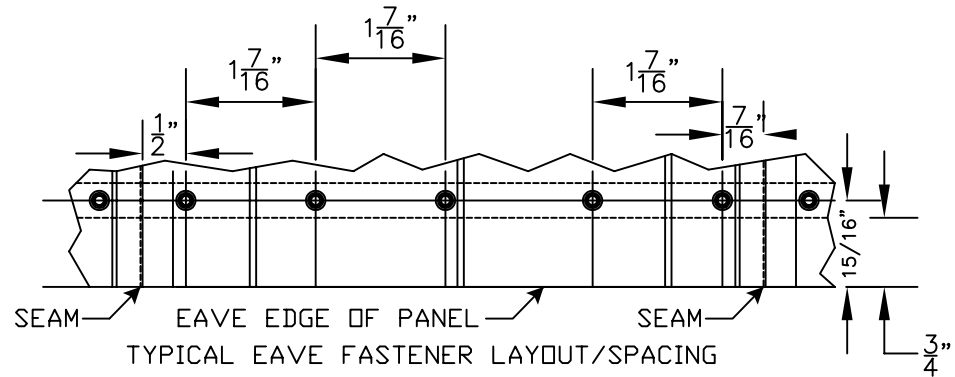

		ATAS INTERNATIONAL, INC. Allentown PA 610-395-8445 Mesa AZ 480-558-7210					
		TITLE FLS Eave w Wall (Fixed) - ply					
DWG NO. / FILE NO.		FLS Eave w Wall (Fixed) - ply				SCALE 3"=1'-0"	
DRAWN BY DAS	DATE 3-6-06	APPR. BY JEB	DATE 6-1-06				
REVISION NO. XXXX	REVISION DATE MM/DD/YY	APPR. BY XXXX	APPR. DATE MM/DD/YY				

Rev. No.	Revision Date	Drawn By	Description of Revision
0	6-1-06	DAS	FLS Eave w Wall (Fixed) - ply