



ATAS International, Inc.

Sustainable Building Envelope Technology



EXTERIOR APPLICATIONS

CEILING & SOFFIT SYSTEMS

TABLE OF CONTENTS

Ceilings:


Page 3 Carrier for Suspended Ceiling Systems

Page 4-5 Linear Ceiling™

Soffits:

Page 6 Wind-Lok Soffit®

Page 7 Additional Soffit Options

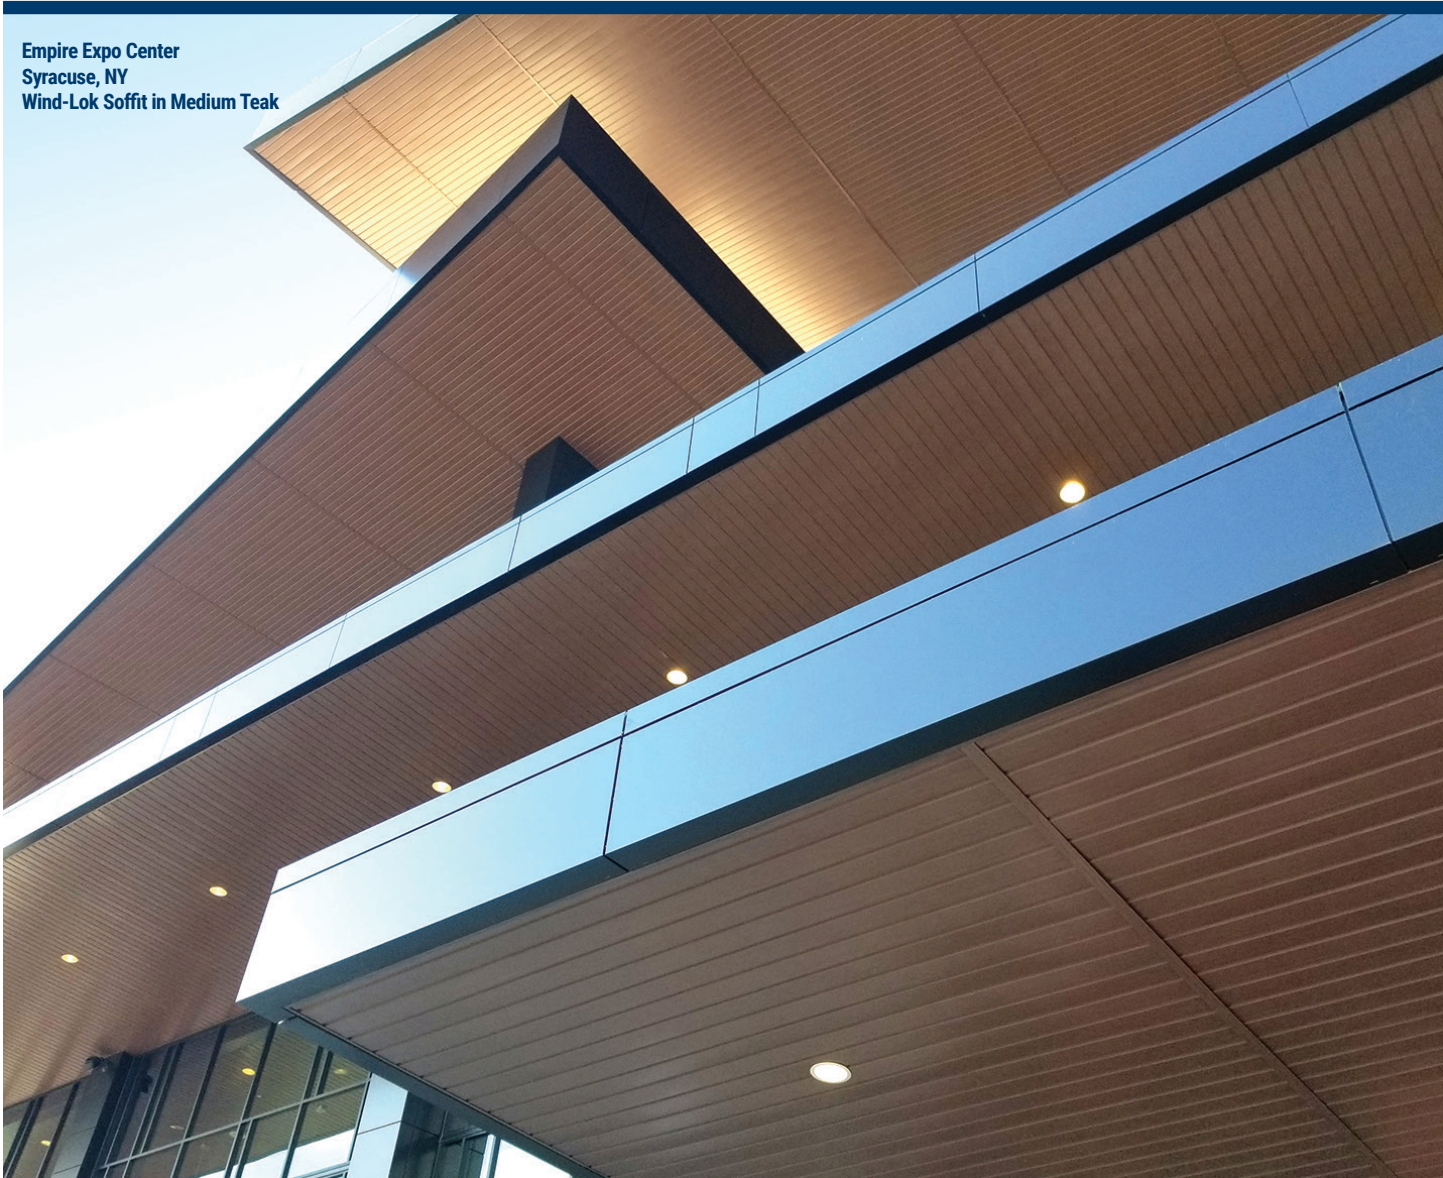

ON THE COVER

Davio's at King of Prussia Town Center | King of Prussia, PA | Opaline Soffit in Coppertone

CARRIER FOR SUSPENDED CEILING SYSTEMS

The carrier is prepunched and roll formed from prepainted .040 aluminum. The standard length of the carrier is 12'. Holes are prepunched in the top and sides for easy hanging. The ceiling can be suspended by wires or rigid framing, or attached directly to the structure.

SUGGESTED INSTALLATION TECHNIQUES

1, 2, 3 & 4. The simplicity of the installation speaks for itself. The carrier is suspended by wires or rigid frame. The panel is snapped onto the carrier with or without filler strips. The system can also be directly attached to the substructure. The carrier for the Linear Ceiling system is available in .040 aluminum. The carrier track repeats in 4" increments making the different sizes of ceiling panels interchangeable.

For proper installation, allow a $\frac{1}{8}$ " space between panels* for thermal movement. It is recommended that this hairline connection should be at least 4'-0" and three courses apart on a staggered formation.







5. The splice should be made at the center of the carrier, or use a splice plate to make the connection. Factory lengths are recommended to reduce distortion. The splice pieces are available in the same quality material as the panels. Another effect can be accomplished by dividing the ceiling into equal parts and using an H channel between sections.

6. When air circulation is desired, the filler can be omitted.



7. For acoustical efficiency, simply lay a low density black fiberglass blanket across the top of the panels between the carriers.

8. For unusual ceiling treatments or aesthetic design reasons, the ceiling system can be installed on a curve. The panels should be installed on a radius carrier which will need a solid support by others. The length of the radius carrier is 12'-0".


*where panels meet end to end

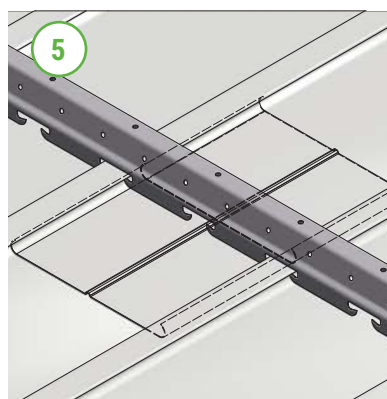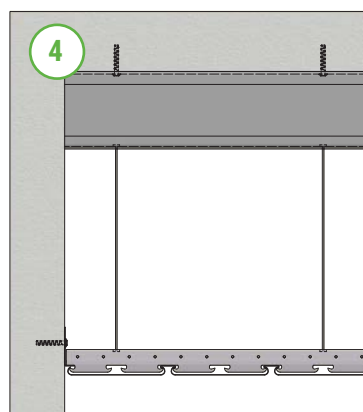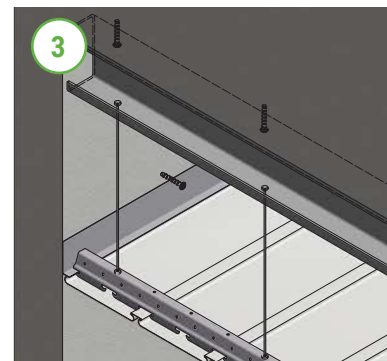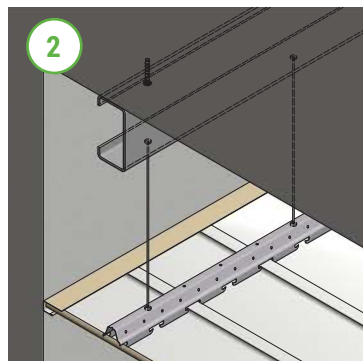


6




7

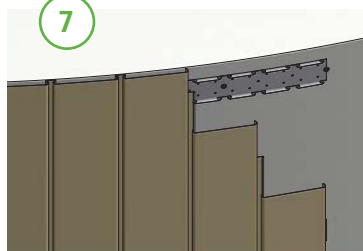


8

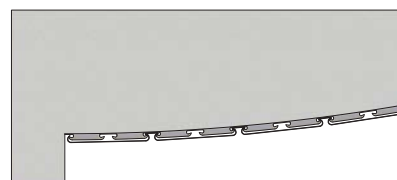

Round Edge:





Linear Ceiling (LCR338)




Linear Ceiling (LCR738)

Box Style:

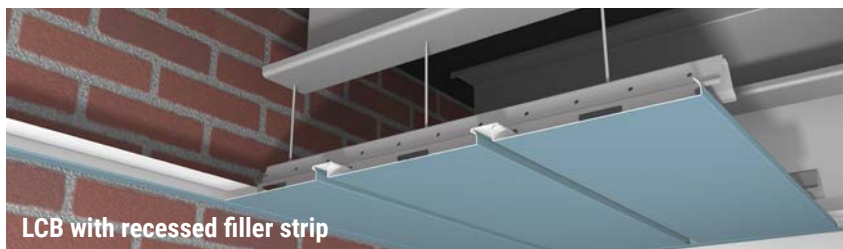

Linear Ceiling (LCB338)



Linear Ceiling (LCB738)

SKU:

Round Edge: LCR338, LCR738

Box Style: LCB338, LCB738

Material:

.019, .024, .032 aluminum

Panel Width:

3³/₈" , 7³/₈"

4" , 8" coverage with filler strips

Panel Length:

Minimum 4'-0" , maximum 45'-0"

Panel Height:

5/8"

Texture:

Smooth, Perforated, Louvered

Finish:

70% PVDF, Polyester, Mirrored, Laminates

Colors:

Choice of over 30 stock colors in

.032 aluminum;

.019 and .024 aluminum available in

Bone White with a 70% PVDF finish.

Custom colors available*

Anodized:

Clear Satin, Dark Bronze

Accessories:

Suspended carrier, a complete line of trims available

Carrier:

Metal: Aluminum

Gauge: .040


Length: Standard 12'-0"

Filler Strips (optional):

Available in .019 aluminum in Black or Bone White


*Subject to minimum quantities and longer lead time. Inquire for availability.

Filler Strip:

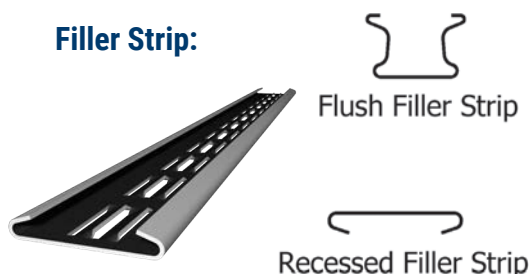




Tanger Outlets
Daytona Beach, FL
Linear Ceiling in Cherry Wood Grain Laminate

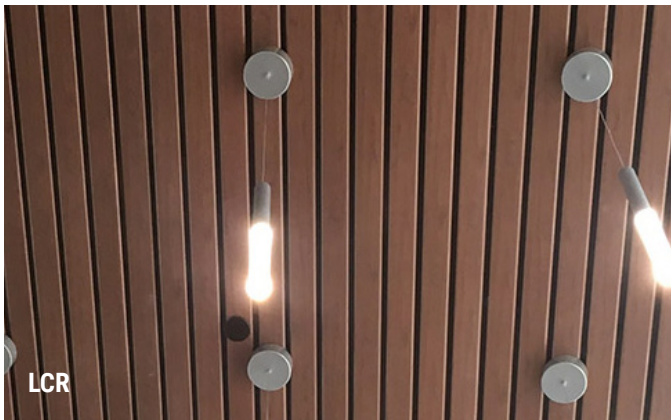


The Linear Ceiling system is available in **two distinct profiles: round edge or a square box**; with or without filler strips. Each profile has a choice of two widths that are interchangeable due to the 4" increments of the carrier system. The two panel widths provide coverages of 4" and 8".


Linear Ceiling - LCR

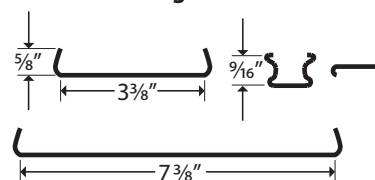


Linear Ceiling - LCB



For more information: Visit www.atas.com/linearceiling

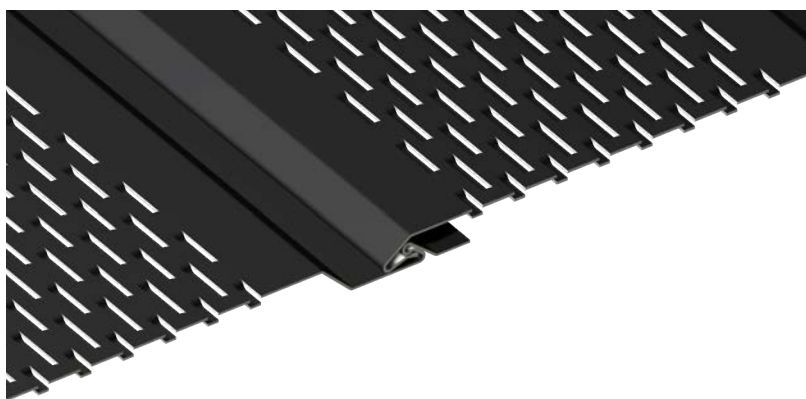

Wind-Lok Soffit Panel (MPS120)

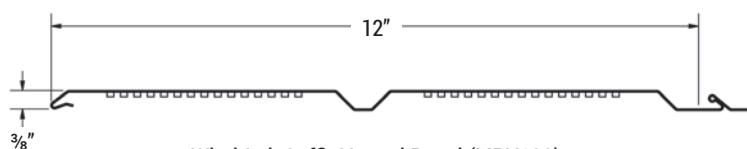

Wind-Lok Soffit Vented Panel (MPV120)

SKU:

MPS120, MPV120

Material:

.019, .024, .032 aluminum

Panel Coverage:

12"

Panel Length:

Standard length is 12'-0", special lengths are available with an 8'-0" minimum, maximum 25'-0"

Panel Height:

$\frac{3}{8}$ "

Texture:

Smooth or Embossed, Vented

Finish:

70% PVDF

Colors:


Choice of over 30 stock colors in .032 aluminum; .019, .024 aluminum available in Bone White only

Custom colors available*


Anodized:

Clear Satin, Dark Bronze (MPS120 only)

*Subject to minimum quantities and longer lead time. Inquire for availability.

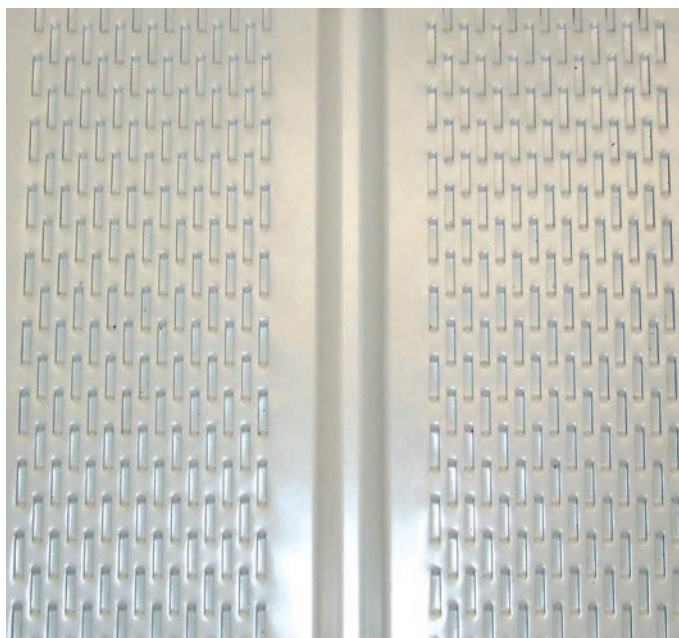

Vented Wind-Lok Soffit Panels allow air circulation, to help in the reduction of interior condensation. They are installed by the patented **"hook, pull, and fasten"** system, which allows for quick and easy installation with concealed fasteners. Panels may be solid or vented. Typical applications for Wind-Lok are wide overhangs and ceilings on porches, breezeways, carports and patios.

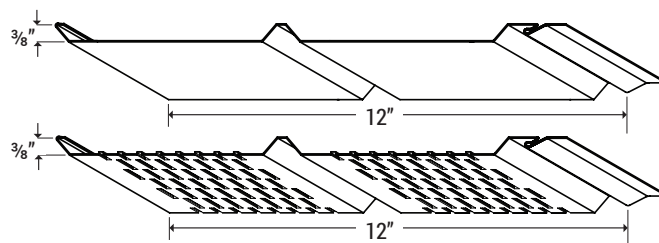


For more information: Visit www.atas.com/windlok


ADDITIONAL SOFFIT OPTIONS




FLUSH

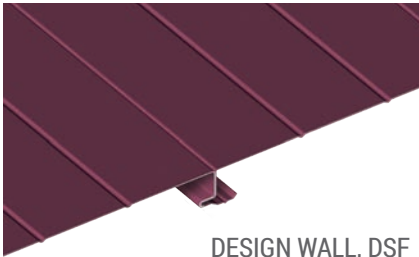

DESIGN WALL, DSF

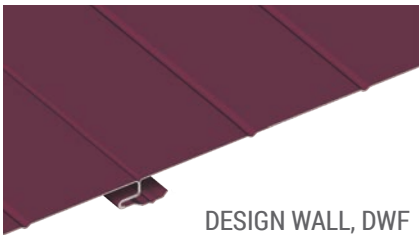

DESIGN WALL, DWF

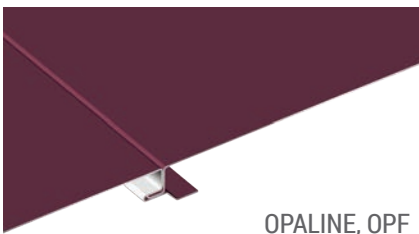

OPALINE, OPF


REVEAL



DESIGN WALL, DSH




DESIGN WALL, DWH

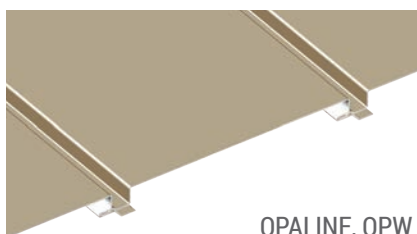


OPALINE, OPW


RIBBED

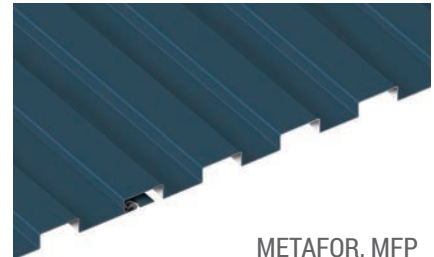


METAFOR, MFP

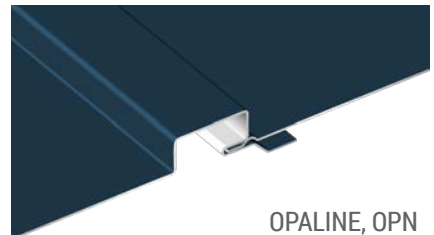


OPALINE, OPN

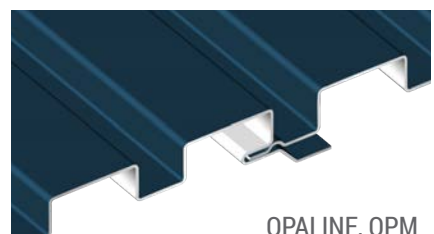


OPALINE, OPM

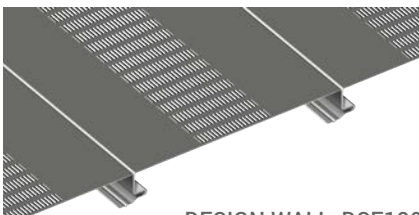

DESIGN WALL, DSF120
WITHOUT STIFFENING RIBS, LOUVERED

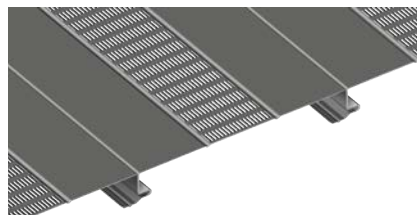

DESIGN WALL, DSF120
WITH STIFFENING RIBS, LOUVERED

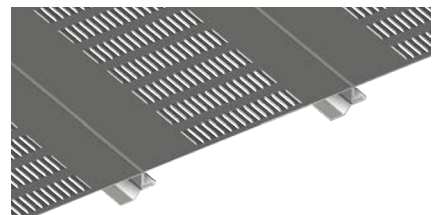


OPALINE, OPF, LOUVERED









For more information: Visit www.atas.com/soffits

COLOR CHART





Stock Colors | 70% PVDF Finish

					
Black (02)	Classic Bronze (01)	Medium Bronze (03)	Hartford Green (27)	Forest Green (11)	Teal (19)
					
Hemlock Green (30)	Patina Green (12)	Chocolate Brown (04)	Boysenberry (25)	Redwood (07)	Mission Red (08)
					
Sierra Tan (09)	Rawhide (15)	Concord Cream (05)	Almond (36)	Sandstone (06)	Regal Blue (18)
					
Slate Blue (21)	Siam Blue (14)	Rocky Grey (16)	Charcoal Grey (62)	Slate Grey (20)	Dove Grey (13)
					
Ascot White (10)	Bone White (26)				



Premium Colors | 70% PVDF Finish

					
Antique Patina (24)	Champagne (31)	Coppertone (23)	Titanium (35)	Silversmith (28)	Brite Red (17)

Laminates

			
Cherry (81)	Oak (82)	Dark Teak (83)	Medium Teak (84)

Oxide Series

	
Tarnished Red (47)	Copper Brown (42)

For additional color offerings, visit www.atas.com/colors.
For current SRI values and agency listings refer to our
Color and Reference Guide: www.atas.com/sri.

