



FASCIA • WATER CONTROL COPING • SUPPLEMENTAL EDGES

PERIMETER EDGE & WATER CONTROL

TABLE OF CONTENTS -

cia
ing
trol
ms
tı



ON THE COVER

Ross Appliance | Collector Box, Corrugated Downspout, and Opaline in Brite Red

Features applied to all products

Tested per ANSI/SPRI/FM 4435/ES-1 as required by code:

- Fascia systems tested per RE-1 and RE-2
- · Coping systems tested per RE-3

Systems include:

- · Concealed splice plates
- Pre-punched fastener slots and holes
- · Required fasteners

Furnished in:


- 12'-0" standard lengths (custom lengths available)
- Large variety of standard materials, gauges and colors:
 - 24 and 22 ga steel
 - .040, .050, .063 aluminum
 - · Stainless steel, zinc, and copper
 - Over 30 standard 70% PVDF paint colors (not standard on all gauges)
 - Custom colors and gauges available

True curved radius and vaulted available on most products

Accessories available - standard cinched and sealed; optional in fully welded and post painted:

- Miters, tees, and zees
- · End closures and end terms
- · Peaks and valleys
- Custom conditions

PERIMETER EDGE & WATER CONTROL

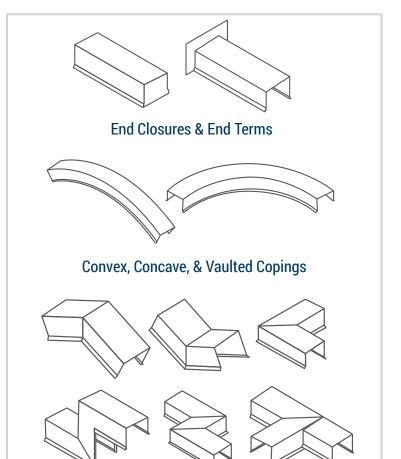

Job-Specific Fabrications

In addition to our full line of standard items, ATAS International offers a wide range of custom fabrication capabilities to fit any project's needs. Radiused sections and accessories, including miters, T-miters, end caps, and end closures are available for all perimeter edge products. Options include fabricated and sealed or welded and 70% PVDF painted to match. Available in over 30 70% PVDF stock colors, our products come equipped with industry expertise and technical support, including design and development assistance, product specifications guidance and installation support.


Miters for peaks, valleys, inside and outside

corners, steps, zees or tees, and more

Private Residence South Hampton, NY Rapid-Lok Fascia in Custom Color

FASCIA —

DRIP EDGE FASCIA



- Continuous 22 ga steel cleat with flange for easier installation and proper location
- Standard 90° roof flange or requested roof slope
- Four standard sizes 3.25", 4.75", 6.25", 7.75" (custom sizes available)

RAPID-LOK FASCIA



- ATAS' best fascia system that installs quickly on all single-ply membranes without strip-in plies or heat welding
- · Continuous 20 ga retainer with snap-on cover
- Six standard sizes 4", 5.5", 7", 8.5", 10", 11.5"
 (custom sizes available)
- · 30-year 150 mph windstorm warranty

EDGE-LOK 2 FASCIA



- Two-piece fascia system for EPDM, PVC and other flexible single-ply membranes
- · Continuous 24 ga steel spring cleat with snap-on cover
- Five standard sizes 5.75", 7.25", 8.75", 10.25", 11.75" (custom sizes available)
- 20-year 120 mph windstorm warranty

GRAVEL STOP FASCIA



- Continuous 22 ga steel cleat with flange for easier installation and proper location
- Standard 0.75" cant or custom height as requested
- Four standard sizes 4", 5.5", 7", 8.5" (custom sizes available)

RAPID-LOK EXTRUDED FASCIA



- Performance and installation ease of Rapid-Lok with continuous extruded aluminum retainer
- Six standard sizes 4", 5.5", 7", 8.5", 10", 11.5"
- · Snap-on cover
- 30-year 150 mph windstorm warranty

-----EDGE-LOK 3 FASCIA



- Three-piece fascia system for Modified and BUR roof systems; also suited for heavy or stiff single-ply membrane systems
- Continuous 24 ga steel cant
- Continuous 22 ga steel cleat with snap-on cover accommodates thick roof membranes
- Five standard sizes 6", 7.5", 9", 10.5", 12" (custom sizes available)
- 20-year 120 mph windstorm warranty

CONTINUOUS CLEAT COPING



- · Continuous 22 ga front cleat with cant to build in slope and flange for easy installation
- · Cover is pre-punched with slotted fastener holes to allow for thermal movement
- · Gasketed screws painted to match cover

RAPID-LOK COPING





- · Snap-on system with no exposed fasteners
- Heavy 20 ga chairs with factory installed splice plates
- Guttered "Dry" splice plates eliminate the need for caulks or tapes at the joints
- · 20-year 120 mph windstorm warranty

RAPID-LOK ULTRA COPING



- · Designed for the highest wind performance and longevity
- · Continuous extruded aluminum cleats at the face and back, with a snap-on coping cap
- · Guttered "Dry" splice plates eliminate the need for caulks or tapes at the joints
- · 30-year 150 mph windstorm warranty

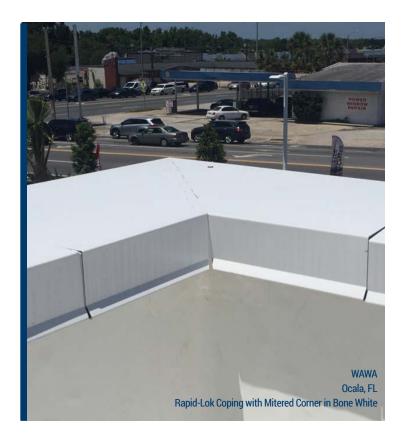

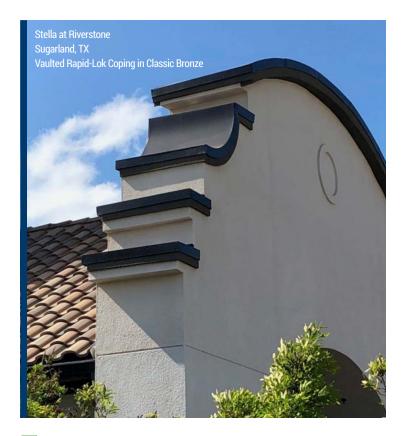

For more information: Visit www.atas.com/coping

WATER CONTROL -

COMMERCIAL GUTTER



- · Fabricated in several styles and sized to meet your needs
- · Internal gutter straps are easy to install and provide a clean exterior appearance
- · Optional external brackets, color matched to the gutter, are
- Standard 12'-0" and 24'-0" lengths with lengths up to 40'-0" available

DOWNSPOUT



- · Offered in several sizes to meet your water control needs
- · Seamed to maximize water control
- · Downspout straps are included, and outlet tubes, elbows and offsets are available

SCUPPERS AND COLLECTOR BOXES



- · Scuppers are made-to-order to fit opening
- Two standard collector sizes 12" x 12" x 8" and 18" x 18" x 12" (custom sizes available)
- · Blanked and formed using CNC equipment for precise uniform pieces
- · Standard cinched and sealed, or optional fully welded and post painted





ULTRA HP GUTTER



- · Designed to resist high winds and tested per ANSI/SPRI GT-1 to prove it performs
- · Available in several styles and sizes, all of which feature ATAS' high performance internal bracket for superior wind resistance
- Standard 12'-0" and 24'-0" lengths with options up to 40'-0" available


SUPPLEMENTAL EDGE SYSTEMS



FLOW-THRU GRAVEL STOP DRAIN BAR FASCIA EXTENDER



- · Perforated for proper water flow and gravel or ballast retention
- 3.75" standard face height (custom available)
- · Available in .040 and .050 aluminum



- · Slotted for proper water flow and ballast retention
- · 3.5" and 5" standard face height (custom available)
- · Offered in .080 or .125 mill aluminum (custom post painting available)



- Provide additional coverage (bigger face) when installed below fascia or coping
- · Continuous 22 ga steel cleat
- · Size made-to-order as required







- · Cover the top of brick ledges or other projections
- · Can be flashed to the wall or under the face of a coping or fascia
- · Continuous 22 ga steel cleat
- · Size made-to-order as required



- · Simple and economical one-piece installation
- · Surface mount, reglet, or through wall
- Standard 3.5" or 5" (custom available)



- · Receiver with a snap-in skirt that can be removed for reroofing or maintenance
- · Surface mount, reglet, or through wall
- · Standard 1.5" receiver with 5" skirt (custom available)

COLOR CHART



For additional color offerings, visit www.atas.com/colors. For current SRI values and agency listings refer to our Color and Reference Guide: www.atas.com/sri. *Special material. Pricing and availability dependent upon project specifics. Color chips available upon request.

800.468.1441

www.atas.com | ATAS International, Inc. Allentown, PA | Mesa, AZ



