



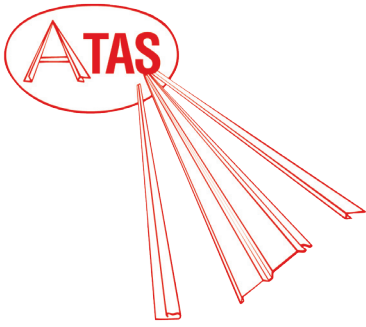


Linear Ceiling System


Recommended maximum spans and hanger spacing for exterior suspended ceiling installations



LCR338 WITH FLUSH FILLER



LCB338 (RECESSED FILLER ONLY)



LCR338 WITH RECESSED FILLER

Scope of Recommendation

- 3 3/8" wide LCB panels installed with recessed filler
- 3 3/8" wide LCR panels installed with flush or recessed filler
- Panel material thickness: 0.032" nominal
- Filler material thickness: 0.019" nominal
- Carrier material thickness: 0.040" nominal

Spacing Recommendations

Allowable Pressure (psf)	Maximum Carrier Spacing	Maximum Hanger Spacing		
		Single Span	Double Span	Triple Span
34.7	2' - 9"	2' - 1"	2' - 10"	2' - 7"
36.2	2' - 8"	2' - 1"	2' - 10"	2' - 7"
38.9	2' - 6"	2' - 1"	2' - 10"	2' - 7"
41.2	2' - 4"	2' - 1"	2' - 10"	2' - 7"

*In some instances, the use of compression posts is recommended to stabilize the assembly and increase uplift resistance.