


LOAD TABLES

ALUMINUM
ASTM B209
3003-H16

8" COVERAGE

OPALINE PANEL OPF080

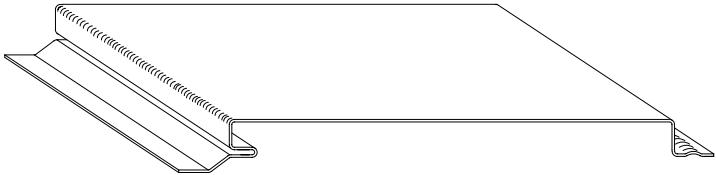

L/180 DEFLECTION CRITERIA GAUGE .032

SECTION PROPERTIES

NEUTRAL AXIS $Y_t = 0.049 \text{ IN.}$ $Y_b = 0.389 \text{ IN.}$
 MOMENT OF INERTIA $I_x = 0.007 \text{ IN.}^4/\text{ft.}$
 SECTION MODULUS $S_t = 0.152 \text{ IN.}^3/\text{ft.}$ $S_b = 0.018 \text{ IN.}^3/\text{ft.}$

LOAD (PSF)	DOWNWARD LOAD			UPWARD LOAD		
	SINGLE SPAN	DOUBLE SPAN	THREE SPAN	SINGLE SPAN	DOUBLE SPAN	THREE SPAN
10	* 2'- 9"	* 3'- 8"	* 3'- 4"	* 2'- 9"	* 3'- 8"	* 3'- 4"
15	* 2'- 4"	* 3'- 2"	* 2'- 11"	* 2'- 4"	* 3'- 2"	* 2'- 11"
20	* 2'- 2"	* 2'- 11"	* 2'- 8"	* 2'- 2"	* 2'- 11"	* 2'- 8"
25	* 2'- 0"	* 2'- 8"	* 2'- 6"	* 2'- 0"	* 2'- 8"	* 2'- 6"
30	* 1'- 10"	* 2'- 5"	* 2'- 4"	* 1'- 10"	* 2'- 5"	* 2'- 4"
35	* 1'- 9"	* 2'- 3"	* 2'- 2"	* 1'- 9"	* 2'- 3"	* 2'- 2"
40	* 1'- 8"	* 2'- 1"	* 2'- 1"	* 1'- 8"	* 2'- 1"	* 2'- 1"
45	* 1'- 8"	* 2'- 0"	* 2'- 0"	* 1'- 8"	* 2'- 0"	* 2'- 0"
50	* 1'- 7"	* 1'- 10"	* 1'- 7"	* 1'- 10"	* 1'- 10"	* 1'- 10"
55	* 1'- 6"	* 1'- 9"	* 1'- 9"	* 1'- 6"	* 1'- 9"	* 1'- 9"
60	* 1'- 6"	* 1'- 8"	* 1'- 8"	* 1'- 6"	* 1'- 8"	* 1'- 8"
65	* 1'- 5"	* 1'- 8"	* 1'- 8"	* 1'- 5"	* 1'- 8"	* 1'- 8"

L/180 DEFLECTION CRITERIA GAUGE .040

SECTION PROPERTIES

NEUTRAL AXIS $Y_t = 0.049 \text{ IN.}$ $Y_b = 0.389 \text{ IN.}$
 MOMENT OF INERTIA $I_x = 0.009 \text{ IN.}^4/\text{ft.}$
 SECTION MODULUS $S_t = 0.180 \text{ IN.}^3/\text{ft.}$ $S_b = 0.023 \text{ IN.}^3/\text{ft.}$

LOAD (PSF)	DOWNWARD LOAD			UPWARD LOAD		
	SINGLE SPAN	DOUBLE SPAN	THREE SPAN	SINGLE SPAN	DOUBLE SPAN	THREE SPAN
10	* 2'- 11"	* 4'- 0"	* 3'- 8"	* 2'- 11"	* 4'- 0"	* 3'- 8"
15	* 2'- 7"	* 3'- 6"	* 3'- 2"	* 2'- 7"	* 3'- 6"	* 3'- 2"
20	* 2'- 4"	* 3'- 2"	* 2'- 11"	* 2'- 4"	* 3'- 2"	* 2'- 11"
25	* 2'- 2"	* 2'- 11"	* 2'- 8"	* 2'- 2"	* 2'- 11"	* 2'- 8"
30	* 2'- 0"	* 2'- 9"	* 2'- 6"	* 2'- 0"	* 2'- 9"	* 2'- 6"
35	* 1'- 11"	* 2'- 6"	* 2'- 5"	* 1'- 11"	* 2'- 6"	* 2'- 5"
40	* 1'- 10"	* 2'- 4"	* 2'- 4"	* 1'- 10"	* 2'- 4"	* 2'- 4"
45	* 1'- 9"	* 2'- 3"	* 2'- 2"	* 1'- 9"	* 2'- 3"	* 2'- 2"
50	* 1'- 9"	* 2'- 1"	* 2'- 1"	* 1'- 9"	* 2'- 1"	* 2'- 1"
55	* 1'- 8"	* 2'- 0"	* 2'- 0"	* 1'- 8"	* 2'- 0"	* 2'- 0"
60	* 1'- 7"	* 1'- 11"	* 1'- 11"	* 1'- 7"	* 1'- 11"	* 1'- 11"
65	* 1'- 7"	* 1'- 10"	* 1'- 10"	* 1'- 7"	* 1'- 10"	* 1'- 10"
70	* 1'- 6"	* 1'- 9"	* 1'- 9"	* 1'- 6"	* 1'- 9"	* 1'- 9"

L/240 DEFLECTION CRITERIA GAUGE .032

SECTION PROPERTIES

NEUTRAL AXIS $Y_t = 0.049 \text{ IN.}$ $Y_b = 0.389 \text{ IN.}$
 MOMENT OF INERTIA $I_x = 0.007 \text{ IN.}^4/\text{ft.}$
 SECTION MODULUS $S_t = 0.152 \text{ IN.}^3/\text{ft.}$ $S_b = 0.018 \text{ IN.}^3/\text{ft.}$

LOAD (PSF)	DOWNWARD LOAD			UPWARD LOAD		
	SINGLE SPAN	DOUBLE SPAN	THREE SPAN	SINGLE SPAN	DOUBLE SPAN	THREE SPAN
10	* 2'- 6"	* 3'- 4"	* 3'- 1"	* 2'- 6"	* 3'- 4"	* 3'- 1"
15	* 2'- 2"	* 2'- 11"	* 2'- 8"	* 2'- 2"	* 2'- 11"	* 2'- 8"
20	* 1'- 11"	* 2'- 7"	* 2'- 5"	* 1'- 11"	* 2'- 7"	* 2'- 5"
25	* 1'- 10"	* 2'- 5"	* 2'- 3"	* 1'- 10"	* 2'- 5"	* 2'- 3"
30	* 1'- 8"	* 2'- 3"	* 2'- 1"	* 1'- 8"	* 2'- 3"	* 2'- 1"
35	* 1'- 7"	* 2'- 2"	* 2'- 0"	* 1'- 7"	* 2'- 2"	* 2'- 0"
40	* 1'- 6"	* 1'- 11"	* 1'- 10"	* 1'- 6"	* 1'- 11"	* 1'- 10"
45	* 1'- 5"	* 1'- 4"	* 1'- 7"	* 1'- 5"	* 1'- 4"	* 1'- 7"
50	* 1'- 5"	* 1'- 5"	* 1'- 10"	* 1'- 5"	* 1'- 10"	* 1'- 9"
55	* 1'- 4"	* 1'- 4"	* 1'- 8"	* 1'- 4"	* 1'- 8"	* 1'- 8"
60	* 1'- 4"	* 1'- 4"	* 1'- 7"	* 1'- 4"	* 1'- 7"	* 1'- 7"
65	* 1'- 4"	* 1'- 4"	* 1'- 7"	* 1'- 4"	* 1'- 7"	* 1'- 7"

L/240 DEFLECTION CRITERIA GAUGE .040

SECTION PROPERTIES


NEUTRAL AXIS $Y_t = 0.049 \text{ IN.}$ $Y_b = 0.389 \text{ IN.}$
 MOMENT OF INERTIA $I_x = 0.009 \text{ IN.}^4/\text{ft.}$
 SECTION MODULUS $S_t = 0.180 \text{ IN.}^3/\text{ft.}$ $S_b = 0.023 \text{ IN.}^3/\text{ft.}$

LOAD (PSF)	DOWNWARD LOAD			UPWARD LOAD		
	SINGLE SPAN	DOUBLE SPAN	THREE SPAN	SINGLE SPAN	DOUBLE SPAN	THREE SPAN
10	* 2'- 8"	* 3'- 7"	* 3'- 4"	* 2'- 8"	* 3'- 7"	* 3'- 4"
15	* 2'- 4"	* 3'- 2"	* 2'- 11"	* 2'- 4"	* 3'- 2"	* 2'- 11"
20	* 2'- 1"	* 2'- 10"	* 2'- 8"	* 2'- 1"	* 2'- 10"	* 2'- 8"
25	* 2'- 0"	* 2'- 8"	* 2'- 5"	* 2'- 0"	* 2'- 8"	* 2'- 5"
30	* 1'- 10"	* 2'- 6"	* 2'- 4"	* 1'- 10"	* 2'- 6"	* 2'- 4"
35	* 1'- 9"	* 2'- 4"	* 2'- 2"	* 1'- 9"	* 2'- 4"	* 2'- 2"
40	* 1'- 8"	* 2'- 3"	* 2'- 1"	* 1'- 8"	* 2'- 3"	* 2'- 1"
45	* 1'- 7"	* 2'- 2"	* 2'- 0"	* 1'- 7"	* 2'- 2"	* 2'- 0"
50	* 1'- 7"	* 2'- 1"	* 1'- 11"	* 1'- 7"	* 2'- 1"	* 1'- 11"
55	* 1'- 6"	* 2'- 0"	* 1'- 10"	* 1'- 6"	* 2'- 0"	* 1'- 10"
60	* 1'- 5"	* 1'- 11"	* 1'- 10"	* 1'- 5"	* 1'- 11"	* 1'- 10"
65	* 1'- 5"	* 1'- 10"	* 1'- 9"	* 1'- 5"	* 1'- 10"	* 1'- 9"
70	* 1'- 5"	* 1'- 9"	* 1'- 9"	* 1'- 5"	* 1'- 9"	* 1'- 9"

- Notes:
- *Indicates maximum span controlled by deflection.
 - All loads are applied perpendicular to surface of panel.
 - No increase for wind loading has been assumed.
 - Since allowable loads and spans can be affected by actual conditions

of use, information in these tables is intended for use only by those qualified to assess these effects.

5. Load tables are based upon section property analysis. Other factors such as fastener adequacy may apply to allowable span conditions per project.



LOAD TABLES


STEEL
ASTM A653
SS 33

8" COVERAGE

OPALINE

PANEL

OPF080

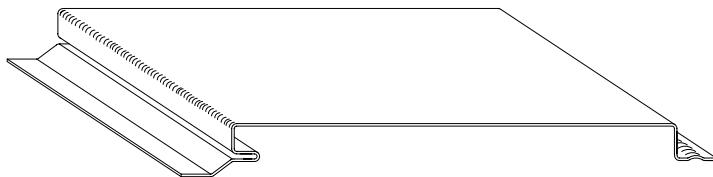L/180 DEFLECTION CRITERIA
GAUGE 24

FY=33KSI

SECTION PROPERTIES		
NEUTRAL AXIS	$Y_t = 0.100 \text{ IN.}$	$Y_b = 0.337 \text{ IN.}$
MOMENT OF INERTIA	$I_x = 0.004754 \text{ IN.}^4/\text{ft.}$	$I_y = 0.004754 \text{ IN.}^4/\text{ft.}$
SECTION MODULUS	$S_t = 0.0475 \text{ IN.}^{3}/\text{ft.}$	$S_b = 0.014 \text{ IN.}^{3}/\text{ft.}$

LOAD (PSF)	DOWNWARD LOAD			UPWARD LOAD		
	SINGLE SPAN	DOUBLE SPAN	THREE SPAN	SINGLE SPAN	DOUBLE SPAN	THREE SPAN
10	* 3'- 5"	4'- 3"	* 4'- 3"	* 3'- 5"	4'- 3"	* 4'- 3"
15	* 3'- 0"	3'- 6"	* 3'- 8"	* 3'- 0"	3'- 6"	* 3'- 8"
20	* 2'- 8"	3'- 0"	* 3'- 4"	* 2'- 8"	3'- 0"	* 3'- 4"
25	* 2'- 6"	2'- 8"	3'- 0"	* 2'- 6"	2'- 8"	3'- 0"
30	* 2'- 4"	2'- 5"	2'- 9"	* 2'- 4"	2'- 5"	2'- 9"
35	* 2'- 3"	2'- 3"	2'- 6"	* 2'- 3"	2'- 3"	2'- 6"
40	2'- 1"	2'- 1"	2'- 4"	2'- 1"	2'- 1"	2'- 4"

L/240 DEFLECTION CRITERIA

GAUGE 24

FY=33KSI

SECTION PROPERTIES		
NEUTRAL AXIS	$Y_t = 0.100 \text{ IN.}$	$Y_b = 0.337 \text{ IN.}$
MOMENT OF INERTIA	$I_x = 0.004754 \text{ IN.}^4/\text{ft.}$	$I_y = 0.004754 \text{ IN.}^4/\text{ft.}$
SECTION MODULUS	$S_t = 0.0475 \text{ IN.}^{3}/\text{ft.}$	$S_b = 0.014 \text{ IN.}^{3}/\text{ft.}$

LOAD (PSF)	DOWNWARD LOAD			UPWARD LOAD		
	SINGLE SPAN	DOUBLE SPAN	THREE SPAN	SINGLE SPAN	DOUBLE SPAN	THREE SPAN
10	* 3'- 1"	4'- 2"	* 3'- 10"	* 3'- 1"	4'- 2"	* 3'- 10"
15	* 2'- 8"	3'- 6"	* 3'- 4"	* 2'- 8"	3'- 6"	* 3'- 4"
20	* 2'- 5"	3'- 0"	* 3'- 1"	* 2'- 5"	3'- 0"	* 3'- 1"
25	* 2'- 3"	2'- 8"	* 2'- 10"	* 2'- 3"	2'- 8"	* 2'- 10"
30	* 2'- 2"	2'- 5"	* 2'- 8"	* 2'- 2"	2'- 5"	* 2'- 8"
35	* 2'- 0"	2'- 3"	* 2'- 6"	* 2'- 0"	2'- 3"	* 2'- 6"
40	* 1'- 11"	2'- 1"	* 1'- 4"	* 1'- 11"	2'- 1"	* 2'- 4"

- Notes:
- *Indicates maximum span controlled by deflection.
 - All loads are applied perpendicular to surface of panel.
 - No increase for wind loading has been assumed.
 - Since allowable loads and spans can be affected by actual conditions

of use, information in these tables is intended for use only by those qualified to assess these effects.

5. Load tables are based upon section property analysis. Other factors such as fastener adequacy may apply to allowable span conditions per project.