




DSF




DSH







DSV



DWF



DWH

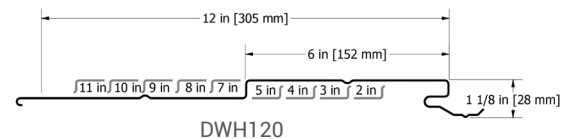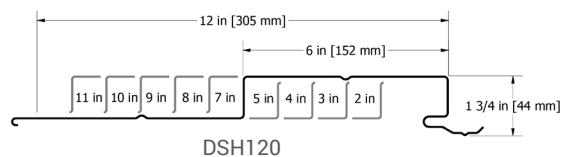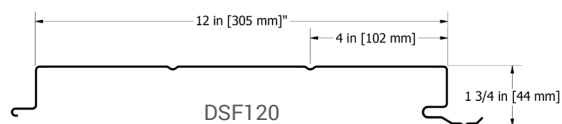

Optional high pressure clip for structural performance available

DESIGN WALL™

SKU: DSF, DSH, DSV, DWF, DWH

MATERIAL

.032, .040, .050 aluminum

24, 22*, 20* ga. metallic coated steel

24, 22* ga. 55% Al-Zn alloy coated steel with acrylic coating

.8, 1.0 mm zinc* (W series only)

16, 20 oz. copper *

PANEL SPECS

Coverage: 12" (stiffening ribs standard for DWF, DSF, DWH, & DSH, specify without ribs)

Minimum Length: 3'-0"


Maximum Length: 26'-0" (DSV only)

Depth: 1 3/4", 1 1/8"

TEXTURE

Smooth, Stucco Embossed, or Wood Grain Embossed (DWF, DWH, and DSV only, 24 ga. metallic coated steel, .032 & .040 aluminum only)


www.atas.com/designwall

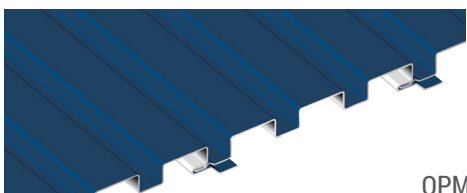


OPM




OPF

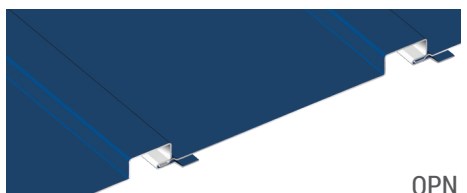

OPN

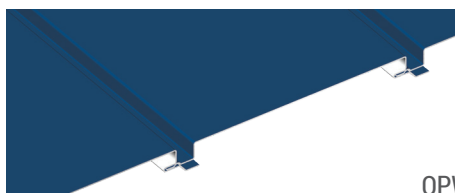

OPW

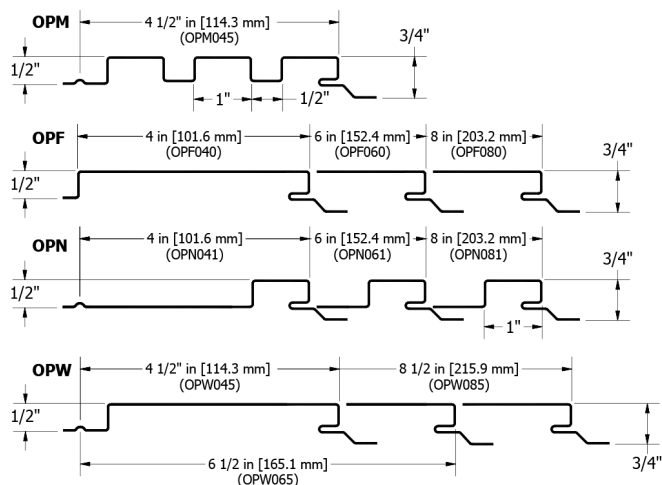

OPALINE™

SKU: OPM, OPF, OPN, OPW

MATERIAL

.032 aluminum

.040 aluminum (OPF, OPN, OPW only)

24 ga. metallic coated steel

16, 20 oz. copper*

PANEL SPECS

Coverage:

OPF: 4", 6", 8"

OPM: 4 1/2"

OPN: 4", 6", 8"

OPW: 4 1/2", 6 1/2", 8 1/2"

Minimum Length: 1'-6"

Depth: 3/4"

TEXTURE

Smooth, Stucco Embossed, or Wood Grain Embossed (24 ga. metallic coated steel, .032 aluminum & .040 aluminum only)

www.atas.com/opaline