

## ATAS International, Inc. Sustainable Building Envelope Technology

## RAPID-LOK EXTRUDED FASCIA

SPECIFICATION SHEET

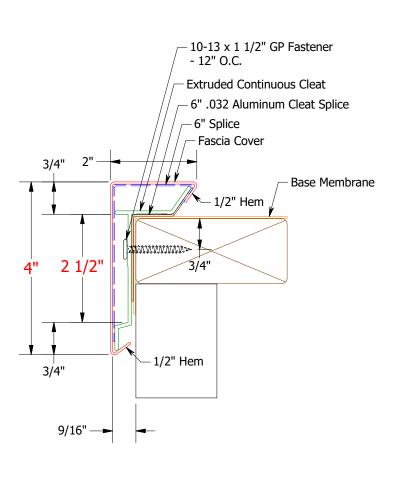

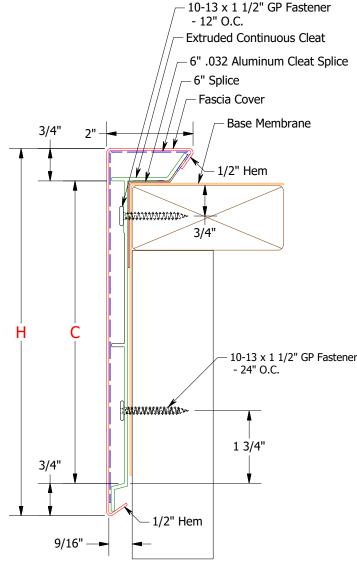

-	C DIMENSION	4" 5-1/2" 7" 8-1/2"	
-	2-1/2"		
-	4"		
-	5-1/2"		
-	7"		
-	8-1/2"	10"	
-	10"	11-1/2"	
	ANSI/SPRI ES-1 Test	ted	
Proiects	Requirement's		

## Horizontal Design Pressure:\_\_\_\_\_psf Job Name: Customer: Job #: Representative: Location: Distributor: CUSTOMER APPROVAL Authorized Signature: Approved by: \_\_\_\_\_\_ Date:

Radius Fascia LF (6'-0	" pcs) (Radi	ius:, C	Convex or Conca	ave)			
Vaulted Fascia LF (6'-	0" pcs) (Rad	dius:,	Convex or Conc	ave)			
<b>Standard Accessories:</b>							
Inside Mitered Corner	(s) (Angle:	)					
Outside Mitered Corn	er(s) (Angle	e:)					
End Closure(s) (	Left, R	Right)					
End Term(s) ( Le	ft, Rig	ht)					
Sump(s) (Downspout	Size:	)					
Spillout(s)							
Custom Accessories: (sketches required)							
Special Miters and Zees							
*All Componets for installing Accessories are included.							
MATERIAL:	THICKN	ESS:					
$\square$ Pre-Finished Aluminum	□.040	□.050	□.063				
☐ Mill Finished Aluminum	□.040	□.050	□.063				
☐ Pre-Finished Steel	□ 24 ga	□ 22 ga					
☐ Stainless Steel	□ 24 ga	□ 22 ga					

**Quantity:** 

COLOR:

Total LF (12'-0" pcs)