


#30 Specification Felt Roof Underlayment

#30 Specification Felt – ASTM D4869, Type IV, ASTM D226, Type II

Atlas® provides a complete selection of roofing felts (or roofing paper). Felt roofing underlayment is asphalt saturated and are manufactured with a high-grade organic mat. #30 Specification Felt roofing underlayment is a specification grade felt for use as an underlayment between the roof deck and the shingles. Adding a layer of roofing paper helps protect the roof from water and moisture — pre and post installation of your three tab, shake or slate shingles.

For additional details on how #30 Specification Felt can help protect your roof, [contact](#) your Atlas regional roofing underlayment sales representative.

Features & Benefits

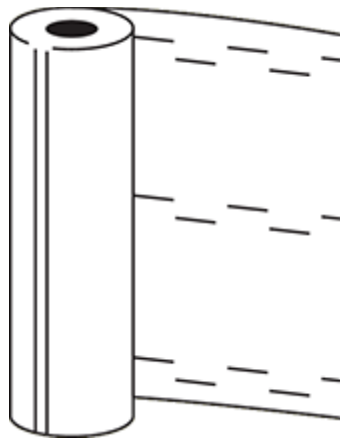

- Heavy Organic Mat
- High Asphalt Saturation
- Heavier Roll Weight
- Tightly Wound Rolls – Less Telescoping
- Consistent Roll Lengths
- Excellent Standard Packaging
- Highly Visible Alignment Lines
- High Tear Strength
- Easier Roll-Out – Less Sticking
- Flatter Installation Lay-Down With Less Curling
- Five Plants To Serve You Nationwide

Product Specifications

Length: 72'

Width: 36"

Square Per Roll Coverage: 2

Square Feet Per Roll: 216

Codes & Compliances

ASTM D4869, Type IV

ASTM D226, Type II

Florida Building Code Approved – FL 11915