

Pro-Cut® High Profile Hip & Ridge



Peak Performance. Protected Beauty. Pro-Cut® High Profile Hip & Ridge shingles featuring 3M™ Scotchgard™ Protector help resist black streaks caused by algae, while providing a finished designer look at the hip and ridge.

FEATURES

Colors to match Atlas shingles
3M™ Scotchgard™ Protector
Atlas Lifetime* Algae Resistance Limited Warranty
Atlas Signature Select® Roofing System Eligible¹

CODES AND COMPLIANCES

Class A Fire Resistance (UL R21860)
Wind Resistance (UL 997)
CAN/CSA-A123.5-M90



For maximum protection and warranty coverage, install an Atlas Signature Select® Roofing System with components designed and backed by an Atlas warranty.

INSTALLATION INSTRUCTIONS

Pro-Cut® High Profile's flexible design eliminates the need for hand bending, undue flexing, and opening or closing of the shingle. Simply remove each shingle unit from the carton and place it on the ridge as-is. Follow the installation instructions as shown below.

El diseño ajustable de Atlas Pro-Cut® High Profile elimina la necesidad de doblar la mano o flexionaria, abrir o cerrar la unidad. Simplemente retire la unidad del carton y colóquela en el caballete como esté. Luego siga las instrucciones como se muestra abajo.

FASTENERS - METHOD 1



Nailing With Hidden Nails

- Install all nails as shown in sketch
- Use standard roofing nails able to properly penetrate through roof sheathing
- Install with 8¼" exposure
- Strike a line to ensure alignment

METODO 1

Clavado Sin Exponer Los Clavos

- Instale los clavos como se muestra en el dibujo
- Use clavos standard para techo apropiados para penetrar las hojas del techo
- Instale el ridge expuesto a 8¼" pulgadas
- Mazque una línea para asegurar alineación

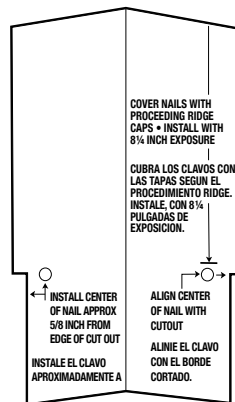

EXPOSURE EXPOSICIÓN

Maintain an 8¼" exposure

Para Máxima cobertura mantener una exposición a 8¼"

FASTENERS - METHOD 2


Exposed Nailing

- Install nails 1" back from front edge
- Use a 6# or 7# box of galvanized nails sufficient in length to properly penetrate the roof sheathing
- Highest wind resistance method
- **NOTE: For optimum appearance do not use large-head roofing nails**

METODO 2

Clavos Expuestos


- Instale los clavos a una pulgada de distancia del borde frontal
- Use clavos numeros 6 o 7 tipo galvanizado suficientemente largos para penetrar las ojas del techo
- Metodo de dias alta resistencia al viento
- **NOTA: Para una apariencia optima no utilice clavos para techo de cabeza grande**

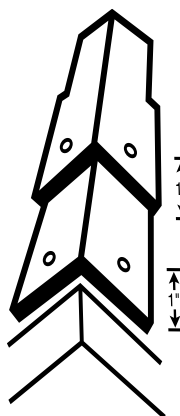

GABLE INSTALLATION - OPTIONAL INSTALACIÓN DEL AGUILON - OPCIONAL

Nail top and side 1" from front end

Clave lado de arriba y la lado 1" del extremo frontal

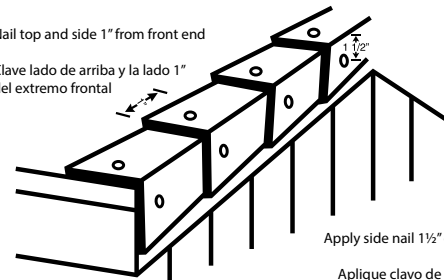

Apply side nail 1½" down from top

Aplique clavo de lado 1½" hacia abajo desde arriba

Limited Warranty: Atlas Roofing Corporation ("Atlas") warrants to you, the original owner of its shingle products, that this product is free from any manufacturing defects that materially affect the performance of your shingle during the Premium Protection Period or that cause leaks for the balance of the applicable warranty period.

Limited Warranty Period: Pro-Cut® High Profile Hip & Ridge Shingles are warranted in the Atlas Shingle Limited Warranty to match the warranty terms of the Atlas shingles installed on the field of the roof deck. Pro-Cut® High Profile Hip & Ridge installed with non-Atlas manufactured shingles covering the field of the deck will be covered by a materials-only warranty provision of 20 years - prorated straight line.

* In order to qualify for the Atlas Lifetime Algae Resistance Limited Warranty against black streaks caused by blue-green algae, Pro-Cut® High Profile Hip & Ridge Shingles must be installed with Atlas shingles featuring Scotchgard™ Protector.

¹ Refer to the Atlas Signature Select® Limited Warranty for all system coverage requirements.

Scotchgard™ and the Scotchgard™ Protector logo, including the plaid design and 3M™ logo, are all trademarks of 3M.



AtlasRoofing.com #AtlasProtects

© Copyright 2024, Atlas Roofing Corporation ATL-246773-00 2/24

PRODUCT SPECIFICATIONS

Dimensions	10" x 11 ½"
Exposure	8 ¼"
Coverage	20 Linear Feet
Shingles Per Package	30
Material Type	SBS Asphalt Technology
Algae Resistance¹	Scotchgard™ Protector

¹Helps resist the black streaks caused by algae.

PRODUCT LISTINGS SHOW SHINGLE COLOR NEXT TO MATCHING PRO-CUT® HIGH PROFILE HIP & RIDGE COLOR

StormMaster® Shake

Premium Protection with Exclusive Core4® Technology

Shingle Color	Pro-Cut® High Profile Hip & Ridge 
Black Shadow	Black
Copper Canyon	Heather/Copper Canyon
Midnight Lake	Black
Pewter	Pewter
Weathered Wood	Weathered Wood

Pinnacle® Impact

Lasting Beauty that Weathers the Storm

Shingle Color	Pro-Cut® High Profile Hip & Ridge 
Black Shadow IR	Black
Hearthstone IR	Hearthstone
Heather IR	Heather/Copper Canyon
Pewter IR	Pewter
Weathered Wood IR	Weathered Wood

Pinnacle® Pristine

High Performance Meets Lasting Beauty

Shingle Color	Pro-Cut® High Profile Hip & Ridge 
Black Shadow	Black
Coastal Granite	Hearthstone
Copper Canyon	Heather/Copper Canyon
Hearthstone	Hearthstone
Heather	Heather/Copper Canyon
Majestic Shake	Weathered Wood
Pewter	Pewter
Summer Storm	Hearthstone
Weathered Shadow	Weathered Wood
Weathered Wood	Weathered Wood

ProLam™

Exceptional Value in a Designer Look

Shingle Color	Pro-Cut® High Profile Hip & Ridge 
Black Shadow	Black
Hearthstone	Hearthstone
Pewter	Pewter
Weathered Wood	Weathered Wood
Weathered Shadow	Weathered Wood

SAFETY, STORAGE, AND HANDLING

WARNING: Roofing application can be dangerous. Observe all precautions and safety guidelines in accordance with proper roofing trade practices. Minimize roof traffic. Perform regular roof maintenance in appropriate weather.

IMPORTANT PRECAUTIONS: Store on flat surface. Protect from weather during storage and on job site. Sealant protection tape is placed on back of each shingle and does not have to be removed before applying.

For additional safety, storage and handling instructions go to: AtlasRoofing.com/roof-shingles/sds

INSTALLATION AND SPECIFICATIONS

For warranty installation instructions go to: AtlasRoofing.com/roof-shingles/pro-cut-hip-and-ridge