
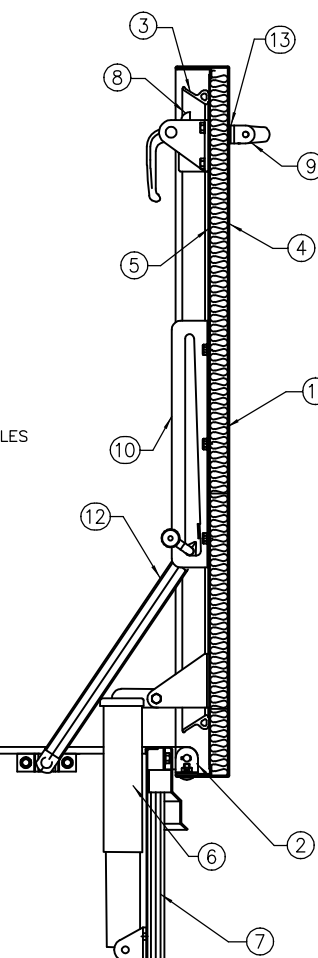
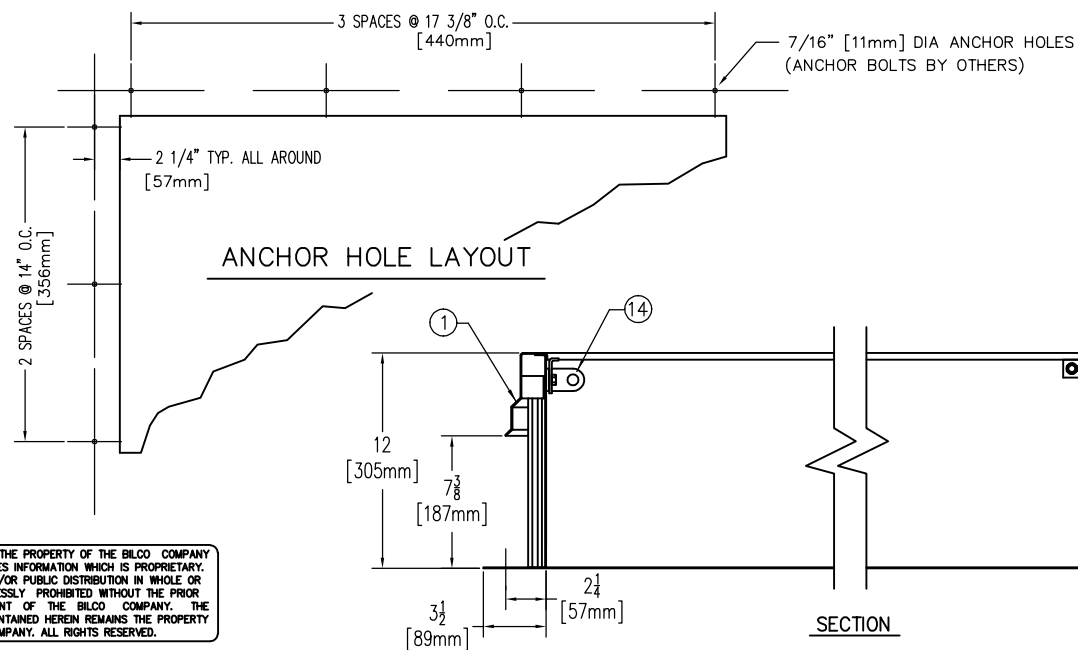
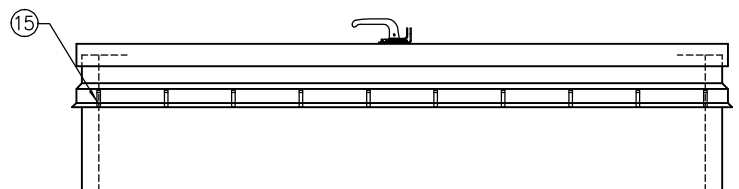


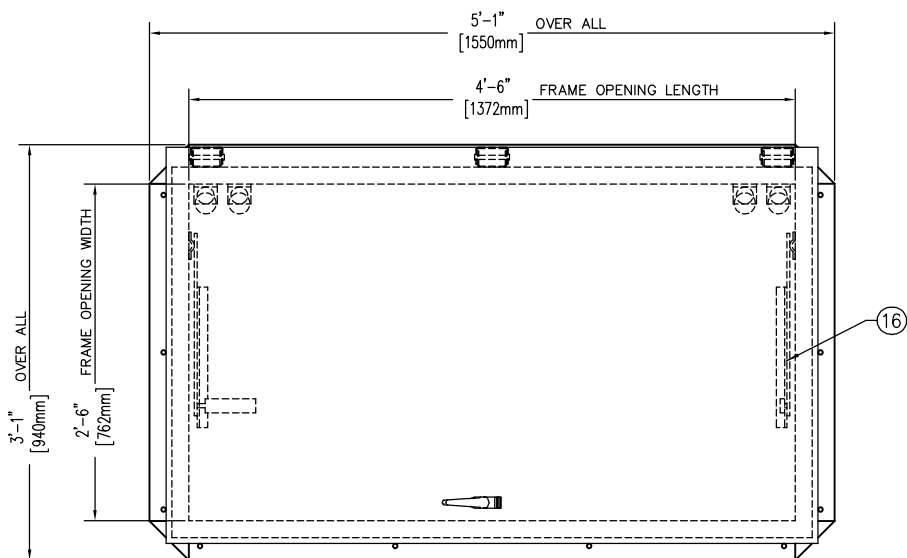

SPECIFICATIONS

- FRAME W/ CAPFLASHING (CORNERS FULL WELDED)
 - NB-20 - 14 GAUGE P.B. GALV. STEEL
 - NB-40 - 14 GAUGE P.B. GALV. STEEL
 - NB-50 - 11 GAUGE ALUMINUM
- PINTLE HINGE
- GASKET (ALL AROUND COVER)
- COVER GAUGE
 - NB-20 - 14 GAUGE P.B. GALV. STEEL
 - NB-40 - 11 GAUGE ALUMINUM
 - NB-50 - 11 GAUGE ALUMINUM
- COVER LINER
 - NB-20 - 22 GAUGE P.B. GALV. STEEL
 - NB-40 - 18 GAUGE ALUMINUM
 - NB-50 - 18 GAUGE ALUMINUM
- SPRING LIFTING MECHANISM
- 1" RIGID FIBERBOARD INSULATION
- SLAM LATCH
- INSIDE AND OUTSIDE HANDLES W/ PADLOCK HASPS
- ARM GUIDE BRACKET
- 1" THICK FIBERGLASS COVER INSULATION
- HOLD OPEN ARM W/ RED VINYL GRIP
- NEOPRENE GASKET
- LOCK STRIKE & PADLOCK HASP
- BILCLIP® FLASHING SYSTEM
- GUIDE ARM

SHOP FINISH:

STEEL: RED OXIDE PRIMER
 ALUMINUM: MILL FINISH
 HARDWARE: NON-CORROSIVE MATERIALS
 (UNLESS OTHERWISE SPECIFIED)

THIS PRODUCT MAY BE INSTALLED ON EITHER A FLAT OR SLOPING ROOF. WHEN INSTALLED ON A SLOPE, THE HINGE SIDE MUST RUN PARALLEL WITH THE SLOPE. IF SLOPE EXCEEDS 30°, ADVISE FACTORY FOR MODIFICATION.

CUSTOMER:

P.O. N°

JOB:

SALES REP:

Manufacturers of Doors for Special Services
Bilco® THE BILCO COMPANY
 New Haven, Connecticut 06505

SINGLE LEAF ROOF SCUTTLE TYPE NB SIZE 2'-6" x 4'-6"

QTY	TYPE	METAL
☐	NB-20	STEEL COVER/STEEL FRAME
☐	NB-40	ALUM. COVER/STEEL FRAME
☐	NB-50	ALUM. COVER/ALUM. FRAME