

No Matter What Your Application...



Patent Pending

The VersaMount™ Has You Covered

Bilco's new VersaMount™ access hatch will expand your installation options while providing your customer with ease of operation, weather-tight performance, and years of maintenance-free service.

Whether your application



Bilco's VersaMount access hatch is available for immediate shipment in four industry-standard sizes.

**Jb-Built
Wood Curbs**



**Jb-Built
Concrete Curbs**



**Existing Irregularly
Sized Curbs**



**Jb-Built/
Prefab Metal Curbs**



**Over Existing
Scuttle Curbs**



involves new construction, retrofit, or replacement, the VersaMount's innovative anchor clip system and versatile frame design will help complete the job efficiently, professionally, and permanently.

Bilco®

Call (203) 934-6363
or log on to www.bilco.com

Bilco's VersaMount™ Access Hatch

The Bilco VersaMount™ access hatch combines the ease of operation, weathertight performance, and the long service life of a quality Bilco roof hatch, with the added advantage of enhanced installation flexibility. The product features an innovative mounting system and complete installation instructions for fast, secure, professional installation in a variety of applications involving job-built and existing curbs, as well as curb-less openings. The VersaMount access hatch is available in steel, aluminum and stainless steel, in three industry-standard sizes plus a special metric size.


SPECIFICATIONS:

Access hatch shall be Bilco Model# _____ size _____ as manufactured by The Bilco Company in accordance with the following specifications:


- Material & Finish:** Cover and frame are 14 ga. (1.9mm) paint bond galvanized steel / red oxide primer [or 11 ga. (2.3mm) aluminum / mill finish] [or 14ga. (1.9mm) Type 304 stainless steel / sand blast finish]. Hardware components are zinc-plated and chromate sealed, unless otherwise noted.
- Cover:** Breakformed, hollow-metal design with 1" (25mm) concealed insulation, 3" (76mm) beaded, overlapping flange, fully welded at corners, and internally reinforced for 40 psf (195 kg/m²) live load.
- Frame:** Breakformed, hollow-metal design with 1" (25mm) concealed insulation, 2-5/8" (67mm) mounting flange and 1-1/2" (38mm) apron, fully welded at corners. Stainless steel anchor clips are included.
- Gasket:** Specially designed, EPDM rubber gasket, permanently adhered to the cover.
- Hinges:** Heavy pintle hinges with 3/8" (10mm) solid stainless steel hinge pins.
- Latch:** Spring latch with inside and outside handles and padlock hasps.
- Lift Assistance:** Electrostatically coated compression springs enclosed in self-lubricating composite cylinders. Automatic hold-open arm with 1" (25mm) comfort grip handle.
- Warranty:** Five (5) years from date of purchase covering defects in material and workmanship.

Note: The VersaMount access hatch installs on conventional built-up and single-ply roofs when a job-built wood curb is provided by the installer in accordance with established roofing practice.

DETAILS:

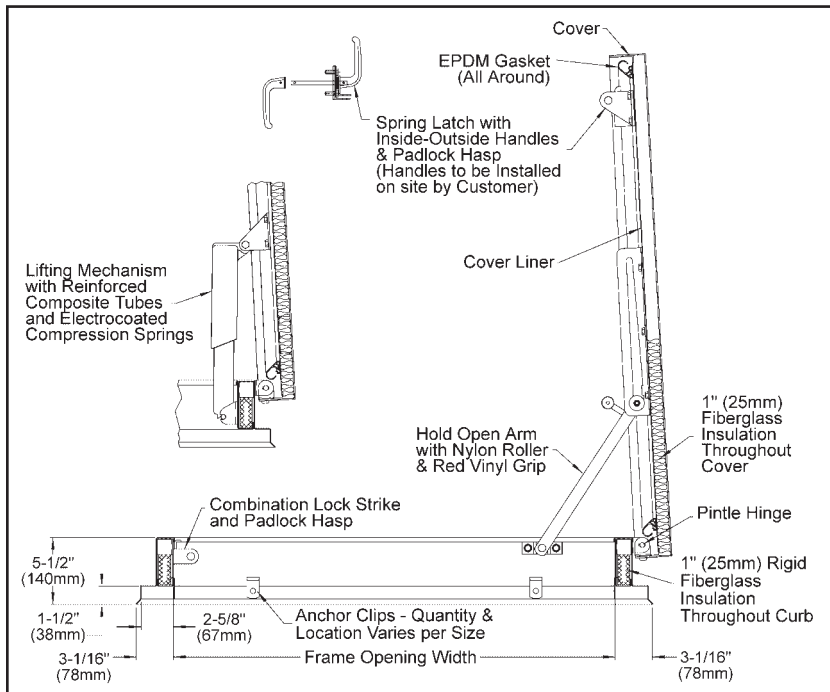

STANDARD SIZES AND WEIGHTS:

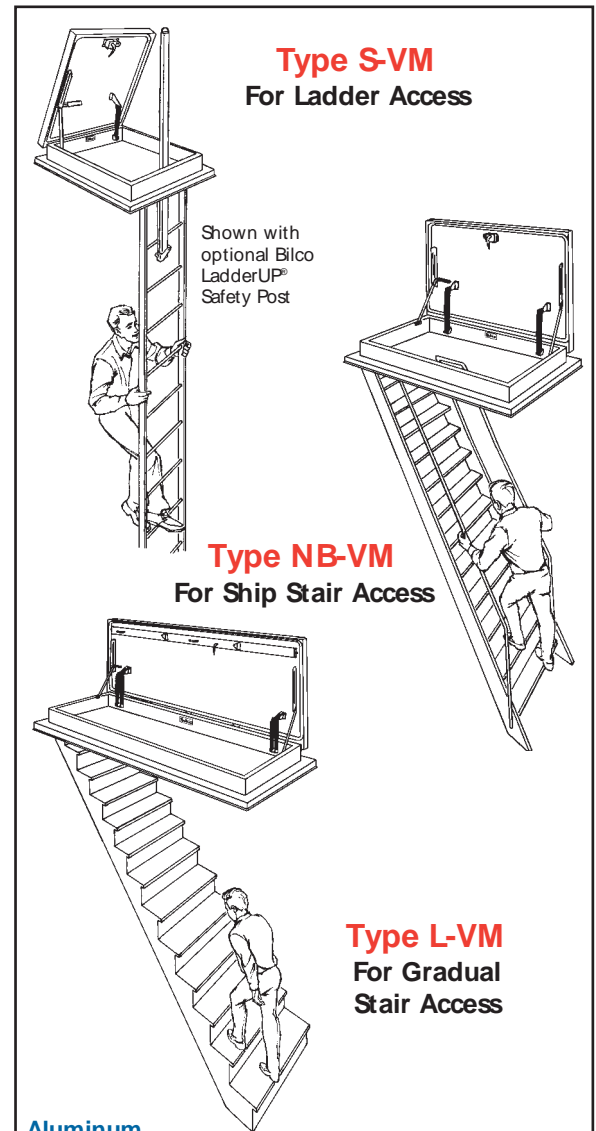

Aluminum

Size	Model #	Shipping Weight
3'0" X 2'6" (914 x 762 mm)	S-50VM	86 lbs (39kg)
2'6" X 4'6" (762 x 1372 mm)	NB-50VM	100 lbs (46kg)
2'6" X 8'0" (762 x 2438 mm)	L-50VM	178 lbs (81kg)
1m X 1m	EW-50VM	90 lbs (41kg)

Steel

Size	Model #	Shipping Weight
3'0" X 2'6" (914 x 762 mm)	S-20VM	152 lbs (70kg)
2'6" X 4'6" (762 x 1372 mm)	NB-20VM	180 lbs (82kg)
2'6" X 8'0" (762 x 2438 mm)	L-20VM	320 lbs (145kg)
1m X 1m	EW-20VM	170 lbs (77kg)

Stainless Steel

Size	Model #	Shipping Weight
3'0" X 2'6" (914 x 762 mm)	S-90VM	180 lbs (82kg)
2'6" X 4'6" (762 x 1372 mm)	NB-90VM	195 lbs (89kg)
2'6" X 8'0" (762 x 2438 mm)	L-90VM	352 lbs (160kg)
1m X 1m	EW-90VM	187 lbs (85kg)



Since 1926

The Bilco Company
 P.O. Box 1203
 New Haven, CT 06505
 (203) 934-6363
 Fax: (203) 933-8478
www.bilco.com