


PAVING CAP SEAL

B-SEAL

PAVING CAP SEAL

B-SEAL is one of the most advanced Paving Cap Seal System in the industry.
BoMetals uses specially formulated PVC to provide a durable sealing system for a maintenance free joint.

- Same continuous look throughout joint
- Protects against debris
- Can be used in the screeding process
- Also available in TPER

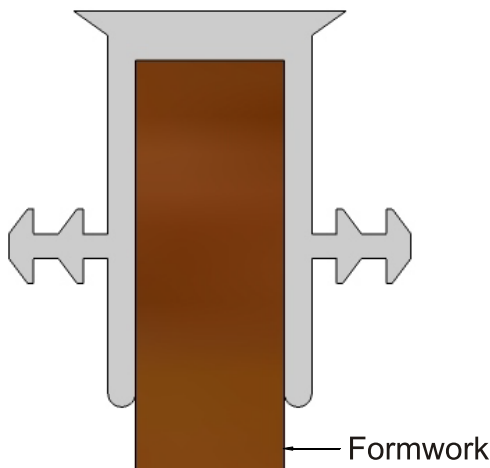

Typical Properties	Nominal Value	ASTM Method
Tensile Strength, psi	2500 min	D-412
Elongation, %	300 min	D-412
Hardness Shore A, ± 3	85	D-2240
Oil Swell, Change in Volume/Weight ASRM #3 Oil, 70 hrs. @212F	$\pm 10\%$ by volume max. $\pm 15\%$ by weight max.	D-471
Abrasion Resistance 10,500 cycles, 1000 grams load	Material Loss - 0.4 gms. max.	D-3884
Ozone Resistance, 20% Strain 300 pphm, 70 hrs. @ 104F	No Cracking	D518
Results After Heat Aging	Tensile Strength Retained: 90% min. Elongation Retained: 90% min. Hardness Changes: 3%	D-573

IMPORTANT: The technical data herein is believed to be accurate. It is offered for your consideration, investigation and verification. Buyers assume all risk of use, storage and handling of the product. NO WARRANTY, EXPRESS OR IMPLIED, IS MADE INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OR MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Nothing contained herein shall be construed as a license to operate under or recommendation to infringe any patents.

