




concrete and masonry accessories

B-SEAL

PAVING CAP SEAL

B-SEAL is one of the most advanced paving cap seal system in the industry. It uses specially formulated PVC to provide a durable sealing system for a maintenance free joint.


- Same continuous look throughout joint
- Can be used in the screeding process
- Protects against debris
- Also Available in TPER

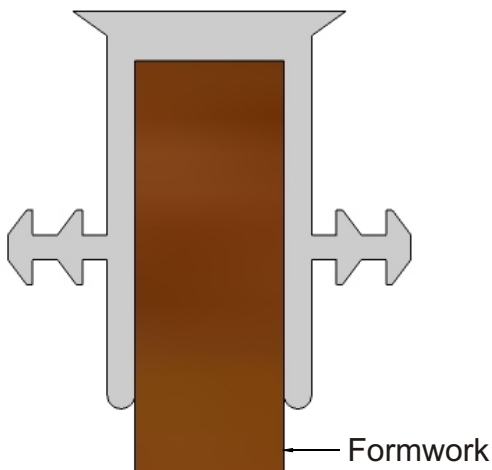


Typical Properties	Nominal Value	ASTM Method
Tensile Strength, psi	2500 min	D-412
Elongation, %	300 min	D-412
Hardness Shore A, ± 3	85	D-2240
Oil Swell, Change in Volume/Weight ASTM#3 Oil, 70 hrs. @ 212°F	$\pm 10\%$ by volume max. $\pm 15\%$ by weight max.	D-471
Abrasion Resistance 10,500 cycles, 1000 grams load	Material Loss - 0.4 gms. max.	D-3884
Ozone Resistance, 20% Strain 300 pphm, 70 hrs. @ 104°F	No Cracking	D-518
Results after Heat Aging 24 hrs. @ 70°C	Tensile Strength Retained: 90% min. Elongation Retained: 90% min Hardness Changed: 3%	D-573

IMPORTANT: The technical data herein is believed to be accurate. It is offered for your consideration, investigation and verification. Buyer assumes all risk of use, storage and handling of the product. NO WARRANTY, EXPRESS OR IMPLIED, IS MADE INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OR MECHANABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Nothing contained herein shall be construed as a license to operate under or recommendation to infringe any patents.


PC-075200




PC-075250




PC-050200




PC-050250




PC-100200




PC-150250




PCR-075200



PCR-050200



PCR-050250



PC-063100

