



Webpatch® D-9001

FAST-SETTING POLYMER-FORTIFIED GYPSUM PATCH

KEY FEATURES

- Repairs minor imperfections in floors and walls
- High strength and crack resistant
- Apply up to 1/2" deep in one application

DESCRIPTION

Bostik Webpatch® D-9001 is a fast-setting, polymer-fortified gypsum based material designed for interior installation and may be used to patch floors, walls, and other surfaces. Webpatch® D-9001 may be used to fill up to 1/2" deep over properly prepared concrete, masonry, cementitious backer board, and structurally sound exterior grade plywood (interior/dry use only). When used properly, this product provides a fast-setting surface that will not check, crack or break up. Bostik Webpatch® D-9001 may be mixed with Bostik 425™ Acrylic Latex Admixture Latex Floor Underlayment Additive instead of water for improved performance. Webpatch® D-9001 contains Bostik Blockade® Anti-Microbial Protection.

DIRECTIONS FOR USE


Read and understand data sheet completely before beginning installation. Follow applicable NTCA, ANSI and TCNA installation standards.

SURFACE PREPARATION

Surfaces must be structurally sound, clean and free of dust, dirt, paint, soap film, oil, adhesive residue, grease, curing compounds and other foreign material that could inhibit bonding. For best results, material and surface should be above 45°F (7°C).

MIXING

Add 25 lbs. of Bostik Webpatch® D-9001 to 6 quarts of clean, cool, potable water or Bostik 425™ Acrylic Latex Admixture Latex Floor Underlayment Additive. Use 1/4 quarts of liquid for 5 lbs. of Bostik Webpatch® D-9001. **DO NOT OVER WATER.** Do not mix more material than can be used in 10 to 15 minutes. The material may be re-mixed; do not re-temper by adding more liquid. The pot life of the material is dramatically affected by jobsite conditions, the powder/liquid mix ratio, and temperature of the jobsite and materials; cold materials, substrate, jobsite and mixing water will extend the pot life.

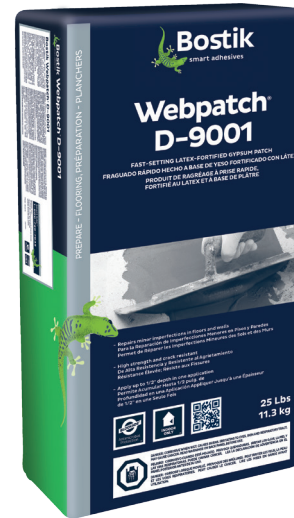

APPLICATION

With the flat side of a trowel held at a 45° angle, work patch into surface filling all broken areas, depressions and cracks in the substrate. "Key in" but do not over trowel.

APPLICATION OVER PLYWOOD

Please refer to the proper flooring industry and APA standards for plywood subfloor installation and preparation. Clean and rough-sand the plywood. Due to the limitations of plywood as a substrate, it is not intended for use in wet interior, or applications subject to heavy/commercial traffic.

TYPICAL PHYSICAL PROPERTIES

Working Time	20-30 minutes
Pot Life	10-15 minutes
Final Set	25-35 minutes (depending on temperature, relative humidity and patch depth)
Cure Time	Final cure is 28 days. Do not allow traffic over floor for 1 hour.
VOC Content	0 g/L (as calculated by SQAQMD Rule 1168)

COVERAGE (FT²)*

Thickness	5 lbs	25 lbs	30 lbs
1/8"	6-8	30-40	36-48
1/16"	15-17	75-85	90-102

*Coverage rates are approximate and actual coverage will vary based on application technique, waste, and/or other job site conditions.

CLEAN UP

Wash tools immediately with water.

STORAGE/SHELF LIFE

Close container tightly and store unused powder in a cool, dry place. Product has a one-year shelf life.

LIMITATIONS

- The use of solvent-based sheet flooring adhesive over Bostik Webpatch® D-9001 is not recommended.
- For areas larger than 4 ft² with a consistent 1/2" depression, the use of Bostik SL-150™ Self Leveling Underlayment is recommended.
- This product is not designed as a wear surface; an appropriate floor covering must be installed before it is open to normal traffic.
- This product is not recommended as an emboss leveler; use Bostik Webcrete® 95 mixed with Bostik 425™ Acrylic Latex Admixture or Bostik Webcrete® 98.

PACKAGING

Available in 25 lb. bags.

WARNING

CONTENTS MAY BE HARMFUL IF SWALLOWED OR INHALED. MAY CAUSE CANCER. MAY IRRITATE EYES, SKIN AND RESPIRATORY TRACT. Do not breathe dust. Do not get in eyes, on skin or on clothing. Do not swallow. Handle with care. Use only in a well-ventilated area or wear a mask. Wear protective clothing including gloves during handling. Wash thoroughly after handling. Do not reuse bag.

KEEP OUT OF REACH OF CHILDREN

FIRST AID TREATMENT

Contains Plaster of Paris, Calcium Carbonate and Quartz Silica. If in eyes or on skin, rinse with water for at least 15 minutes. If on clothes, remove clothing. If breathed in, move person to fresh air. If swallowed, call a Poison Control Center or doctor immediately. Do not induce vomiting.

SEE SAFETY DATA SHEET

CHEMICAL EMERGENCY: 800-424-9300 (USA),
703-527-3887 (International)

MEDICAL EMERGENCY: 866-767-5089

LIMITED WARRANTY

Limited Warranty found at www.bostik.com/us. TO THE MAXIMUM EXTENT ALLOWED BY LAW, BOSTIK DISCLAIMS ALL OTHER EXPRESS OR IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. UNLESS OTHERWISE STATED IN THE LIMITED WARRANTY, THE SOLE REMEDY FOR BREACH OF WARRANTY IS REPLACEMENT OF THE PRODUCT OR REFUND OF THE BUYER'S PURCHASE PRICE. BOSTIK DISCLAIMS ANY LIABILITY FOR DIRECT, INCIDENTAL, CONSEQUENTIAL, OR SPECIAL DAMAGES TO THE MAXIMUM EXTENT ALLOWED BY LAW. DISCLAIMERS OF IMPLIED WARRANTIES MAY NOT BE APPLICABLE TO CERTAIN CLASSES OF BUYERS AND SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATIONS MAY NOT APPLY TO YOU. It is the buyer's obligation to test the suitability of the product for an intended use prior to using it. The Limited Warranty extends only to the original purchaser and is not transferable or assignable. Any claim for a defective product must be filed within 30 days of discovery of a problem, and must be submitted with written proof of purchase.

BOSTIK HOTLINE

Smart help
1-800-726-7845

Bostik, Inc.
11320 W. Watertown Plank Road
Wauwatosa, WI 53226
www.bostik.com/us

