


BARRISEAL-R  
APPLICATION

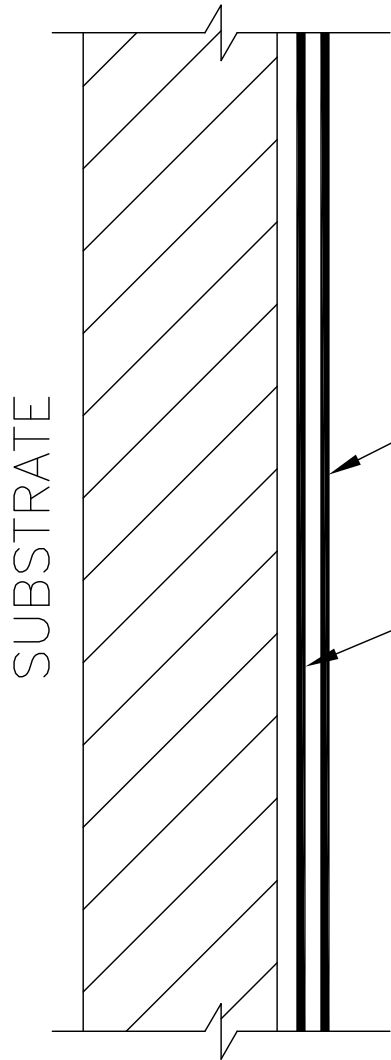


SUBSTRATE

TOP COAT BARRISEAL-R,  
MINIMUM 30 WET MILS

BASE COAT BARRISEAL-R,  
MINIMUM 30 WET MILS

BARRISEAL-S, SINGLE OR  
MULTIPLE COATS, MINIMUM  
60 WET MILS

BARRISEAL-S  
APPLICATION

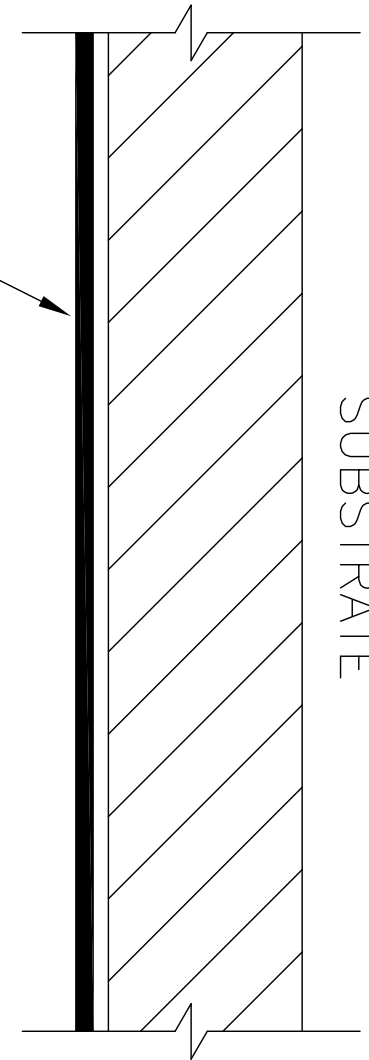

SUBSTRATE

NOTES:

1. FOR ROLLER APPLICATION, ALLOW PREVIOUS COAT TO DRY FIRM BEFORE APPLICATION OF SUBSEQUENT COAT

DETAIL IS INTENDED TO BE A GUIDE  
FOR AIR BARRIER INSTALLATION ONLY.

BVAB-1A

BARRISEAL  
COVERAGE



© 2012 CARLISLE CORPORATION