MEMBRANE SPLICE

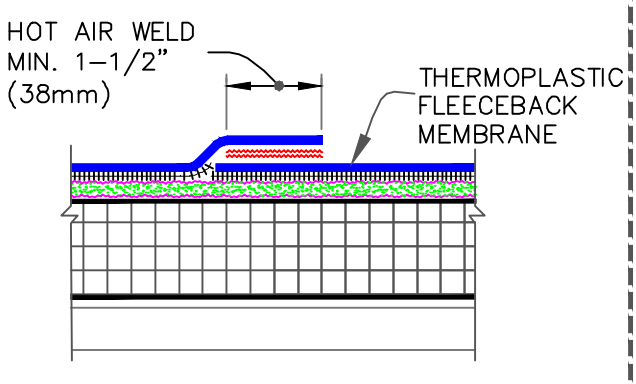

DIMENSION		mm	
A	2–1/4"	57	

END LAP SPLICE

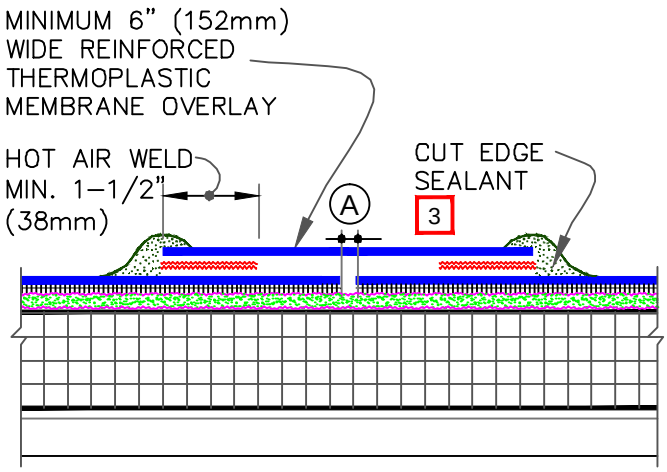

DIMENSION		mm	
A	1"	25	MAX.

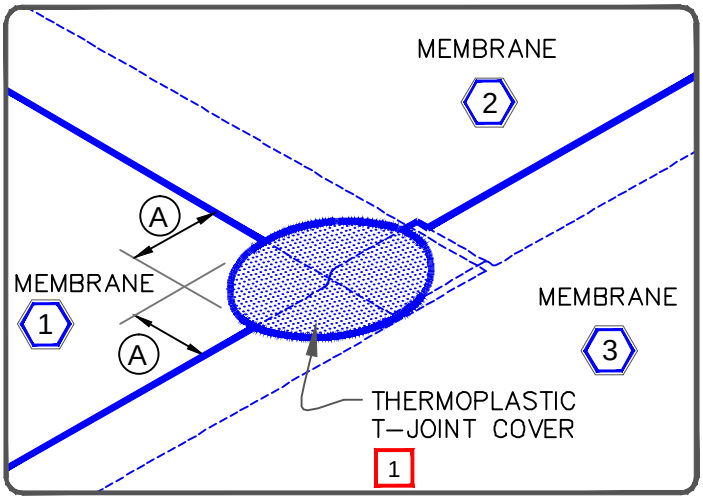

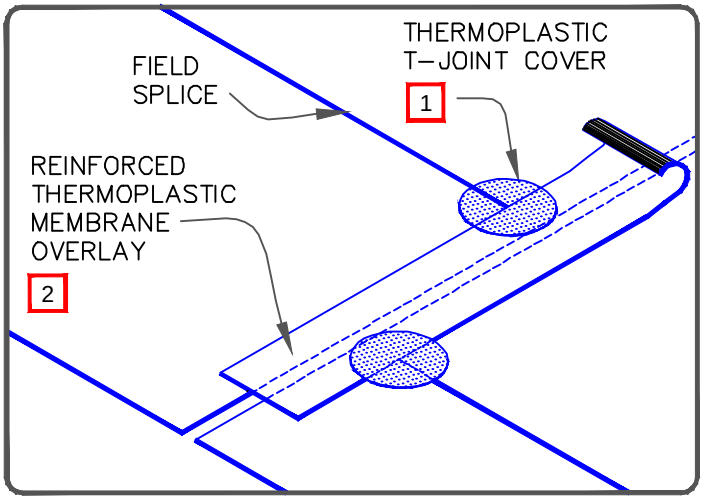

NOTES:

1. WHEN USING 115 OR 135–MIL THERMOPLASTIC FLEECEBACK MEMBRANE, APPLY A 4–1/2" DIAMETER THERMOPLASTIC "T–JOINT" COVER AT ALL FIELD SPLICE INTERSECTIONS.
2. WHEN USING 60 OR 80 MIL THERMOPLASTIC REINFORCED MEMBRANE OVERLAY, INTERSECTIONS BETWEEN SPLICES MUST BE OVERLAID WITH A 4–1/2" (114mm) DIAMETER THERMOPLASTIC "T–JOINT" COVER.
3. APPROXIMATELY 1/8" (3mm) DIAMETER BEAD OF CUT–EDGE SEALANT IS REQUIRED ON CUT EDGES OF REINFORCED TPO MEMBRANE AND RECOMMENDED ON CUT EDGES OF SURE–FLEX PVC MEMBRANE.

FleeceBACK MEMBRANE FAST ADHESIVE/AQUABASE APPROVED SUBSTRATE 0 SEE NOTE(S)	THERMOPLASTIC MEMBRANE SPLICES For additional information, refer to Specifications	FB	DETAIL NO. FB-2B FLEECEBACK ADHERED

© 2011 Carlisle SynTec a division of Carlisle Construction Materials Incorporated