


SecurEdge™ 2000 Standard Fascia

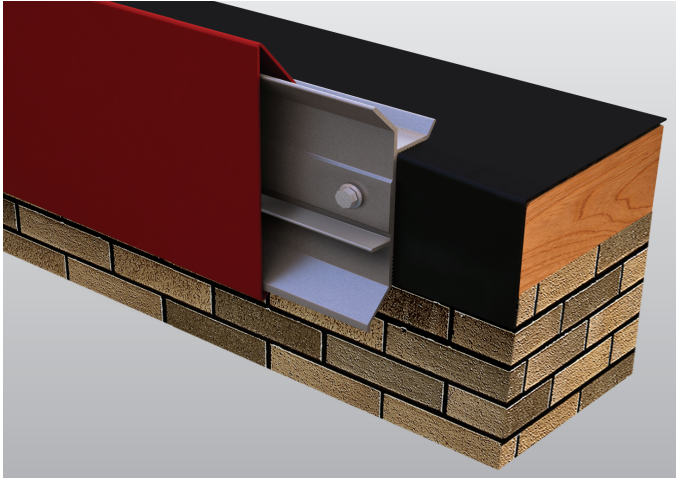

Overview

Carlisle's SecurEdge 2000 combines custom engineering and superior performance with an attractive appearance. Fast and effortless installation eliminates the stripping-in typical of many other roof edge designs.

This top-of-the-line fascia provides the maximum protection against wind uplift damage that is available in today's roofing market. Rigorously tested, SecurEdge 2000 Fascia is proven to be compliant with all relevant building codes.

Features and Benefits

- » Full snap-on design with extruded aluminum bar
- » Prefabricated miters and accessories ensure a proper fit and prevent the need for any field fabrication
- » Available in standard finishes and convenient sizes
- » ANSI/SPRI/FM-4435 ES-1 Tested to comply with International Building Code
- » FM Approved
- » Eligible for coverage under the Carlisle total roof system warranty

Installation

For complete installation instructions, refer to Carlisle specifications and details, or visit www.metalera.com/Carlisle.

Finishes

- » Natural mill-finish aluminum
- » Pre-coat Kynar® 500 – from Carlisle's standard color chart
- » Premium metallic Kynar
- » Anodized aluminum – clear, bronze, and black
- » Custom post-painted Kynar finishes available upon request

Quality Assurance

Tested per ANSI/SPRI Test Method RE-2 Pull-Off test for fascia. Fascia shall be certified by Carlisle to design pressures as indicated in current edition of SPRI's Wind Resistance Standard for Edge Systems Used with Low Slope Roofing Systems. Meets International Building Code. Factory Mutual approved for wind uplift protection. Miami-Dade approved to comply with the High-Velocity Hurricane Zone of the Florida Building Code

Technical Services

Engineering and shop drawings, as well as long-form specifications and CAD details, are available from Carlisle. Product samples, detail sheets, color chips, and color charts are also available for submittal packages. For personal assistance with questions or submittals, contact Carlisle or your local manufacturer's representative.

Specifications

Fascia Model	'H' DIM	'X' DIM	No. of Nailers Covered
AF-40	4" (102 mm)	2 3/4" (70 mm)	1
AF-55	5 1/2" (140 mm)	4 1/4" (108 mm)	2
AF-70	7" (178 mm)	5 3/4" (146 mm)	3
AF-85	8 1/2" (216 mm)	7 1/4" (184 mm)	4

SecurEdge 2000 Standard Fascia

