


SecurEdge™ 400 Snap Coping Max/Max-C

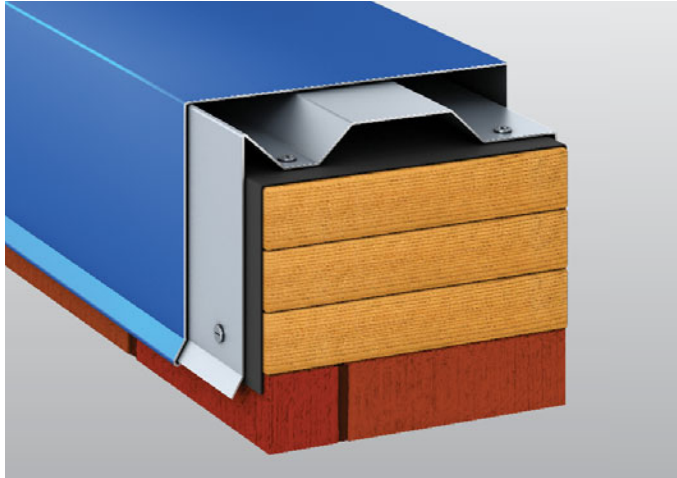

**Also available with spring clip (Snap Coping Max-C)*

Overview

Carlisle's SecurEdge 400 Snap Coping Max system is a two-piece assembly that includes a 12" wide, one-piece segmented cleat and a decorative snap-on coping cover. Available in pre-painted Kynar 500® aluminum and galvalume steel, this product features a 16-gauge (G90) pre-punched cleat spaced at 40" (1012 mm) on center. SecurEdge 400 Snap Coping Max is offered in 10' (3048 mm) coping cover lengths; concealed splice plates and fasteners are included with purchase.

For higher wind uplift performance, our Snap Coping Max-C features the same profile as the Snap Coping Max with a spring clip on the cleat for increased sustained pressure values.

Features and Benefits

- » Manufactured in 10' lengths
- » Simple snap-on cover with no crimping or through-fastening necessary
- » ANSI/SPRI ES-1 tested to comply with international building code
- » Concealed splice plates and fasteners included
- » Miters, End Caps, and custom accessories available
- » Eligible for coverage under the Carlisle total system roof warranty
- » Fastening cleat to vertical wall only required on face heights over 6"

Installation

For complete installation instructions, refer to Carlisle specifications and details or visit www.carlislesyntec.com.

Quality Assurance

Coping is tested per ANSI/SPRI Test Method RE-3 Bi-directional Test for Wind Requirements for Coping and Wall Caps. Coping is certified by Carlisle to design pressures as indicated in current edition of SPRI's Wind Resistance Standard for Edge Systems Used with Low-Slope Roofing Systems. This product meets International Building Code.

Technical Services

Engineering and shop drawings, as well as long-form specifications and CAD details, are available from Carlisle. Product samples, detail sheets, color chips, and color charts are also available for submittal packages. For assistance with questions or submittals, contact Carlisle or your local manufacturer's representative.

Finishes

- » Natural mill-finish aluminum
- » Pre-painted Kynar 500 – from Carlisle's standard color chart
- » Premium metallic Kynar
- » Clear anodized aluminum
- » Custom post-painted Kynar finishes available upon request

Specifications

Material	Face	Wall Width
24 gauge	up to 12"	32" maximum
.040 AL	up to 12"	32" maximum

.050 and .063 aluminum and 22 gauge Galvalume available upon request